

PROJECT MANUAL

**Surficial Aquifer Test Well TW-17
For
City of Lake Worth
IFB #17-102
Project #WT1614**

November 2016

Prepared by:

Mock, Roos & Associates, Inc.
Engineers-Surveyors-Planners
5720 Corporate Way
West Palm Beach, Florida

Engineer's Project
No. B6019.00

PROJECT: Surficial Aquifer Test Well TW-17
for City of Lake Worth
IFB #17-102
Project WT1614

TABLE OF CONTENTS

		<u>NO. OF PAGES</u>
<u>DIVISION 0 - BIDDING AND CONTRACT REQUIREMENTS</u>		
00020	INVITATION TO BID	1
00100	INSTRUCTIONS TO BIDDERS	8
00300	BID FORM	11
00310	BIDDER’S QUALIFICATION QUESTIONNAIRE	4
00500	AGREEMENT	9
00501	OPINION OF ATTORNEY	1
00610	CONSTRUCTION PERFORMANCE BOND	2
00620	CONSTRUCTION PAYMENT BOND	2
00630	NOTICE OF COMPLIANCE WITH CHAPTER 556, FLORIDA STATUTES.....	1
00670	CONTRACTOR'S AFFIDAVIT TO OWNER	1
00680	APPLICATION FOR PAYMENT	1
00681	SCHEDULE OF VALUES AND WORK COMPLETED	1
00700	GENERAL CONDITIONS	65
00800	SUPPLEMENTARY CONDITIONS	6
00820	SPECIAL CONDITIONS	3
00840	RESIDENT PROJECT REPRESENTATIVE	3
00900	ADDENDA (ADDED THIS LOCATION IN PROJECT MANUAL - IF ANY)	
	SPECIFICATIONS TABLE OF CONTENTS.....	1
	DIVISION 1 - GENERAL REQUIREMENTS	5
	TECHNICAL SECTIONS OF SPECIFICATIONS	40

PROJECT: Surficial Aquifer Test Well TW-17
for City of Lake Worth
IFB #17-102
Project WT1614

Date: November 10, 2016

00020
INVITATION TO BID

Sealed bids, in duplicate, will be received by City of Lake Worth Procurement Office, City Hall, 2nd Floor, 7 North Dixie Highway, Lake Worth, Florida 33460 for the subject Project until 3:00 p.m., local time, December 15, 2016, then opened publicly at that time.

The OWNER for the Project is City of Lake Worth, Florida.

The Contract Documents will be open to inspection at Mock, Roos & Associates, Inc., 5720 Corporate Way, West Palm Beach, Florida 33407 or in electronic form on the City of Lake Worth website: www.lakeworth.org/business/bids. All questions are to be submitted in writing to Mock•Roos or email to: john.leemon@mockroos.com. The last day to submit questions is five business days before bids are due.

Contract Documents may be obtained in electronic form from Demand Star. Any bid received must be plan holders of record with Demand Star. Any bid received from a bidder that is not a plan holder of record will be returned unopened.

This Contract is a unit price contract.

Bids must be accompanied by a Bid Security in the form of a certified or bank check made payable to the Owner, or a Bid Bond. The amount of the security shall not be less than five (5) percent of the Bidder's total price indicated in Bid Form.

No Bid may be withdrawn for a period of 120 days after the scheduled closing date for the receipt of bids except as otherwise provided in Article 13 of the Instructions to Bidders.

The successful Bidder, who is awarded the Contract, shall be required to furnish a 100% Construction Performance Bond and a 100% Construction Payment Bond.

The OWNER reserves the right to reject any or all Bids, to waive informalities, and to re-advertise.

/s/ Corinne Elliott, Assistant Finance Director

Publish: Palm Beach Post - November 13, 2016

INVITATION TO BID
00020-1

00100
INSTRUCTIONS TO BIDDERS

1. DEFINED TERMS.

Terms used in these Instructions to Bidders which are defined in the Standard General Conditions of the Construction Contract (EDCJC C-700, 2013 Edition) have the meanings assigned to them in the General Conditions. The term "Bidder" means one who submits a Bid directly to Owner, as distinct from a sub-bidder, who submits a bid to a Bidder. The term "Successful Bidder" means the lowest, qualified, responsible and responsive Bidder to whom Owner (on the basis of Owner's evaluation as hereinafter provided) makes an award. The term "Bidding Documents" includes the Advertisement or Invitation to Bid, Instructions to Bidders, the Bid Form, and the proposed Contract Documents (including all Addenda issued prior to receipt of Bids).

2. COPIES OF BIDDING DOCUMENTS.

2.1. Complete sets of the Bidding Documents in the number and for the cost, if any, stated in the Advertisement or Invitation to Bid may be obtained from Owner (unless another issuing office is designated in the Advertisement or Invitation to Bid).

2.2. Complete sets of Bidding Documents must be used in preparing Bids; neither Owner nor Engineer assume any responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.

2.3. Owner and Engineer in making copies of Bidding Documents available on the above terms do so only for the purpose of obtaining Bids on the Work and do not confer a license or grant for any other use.

3. QUALIFICATIONS OF BIDDERS.

To demonstrate qualifications to perform the Work, each Bidder must be prepared to submit within five days of Owner's request, written evidence such as financial data, previous experience, present commitments and other such data as may be reasonably specifically requested by Owner or otherwise required in Contract Documents. Each Bid must contain evidence of Bidder's qualification to do business in the state where the Project is located.

4. EXAMINATION OF CONTRACT DOCUMENTS AND SITE.

4.1. It is the responsibility of each Bidder before submitting a Bid, to (a) examine the Contract Documents thoroughly, (b) visit the site to become familiar with local conditions that may affect cost, progress, performance or furnishing of the Work, (c) consider federal, state and local Laws and Regulations that may affect cost, progress, performance or furnishing of the Work, (d) study and carefully correlate Bidder's observations with the Contract Documents, and (e) notify Engineer of all conflicts, errors or discrepancies in the Contract Documents.

4.2. Reference is made to Division 1: General Requirements of the Specifications for the identification of:

4.2.1. those reports of explorations and tests of subsurface conditions at the site which have been utilized by Engineer in preparation of the Contract Documents.

4.2.2. those drawings of physical conditions in or relating to existing surface and subsurface conditions (except Underground Facilities) which are at or contiguous to the site which have been utilized by Engineer in preparation of the Contract Documents.

4.2.3. Copies of such reports and drawings (referred to above), if not attached to the Specifications or added on the Drawings, will be made available by Owner to any Bidder on request. Those reports and drawings are not a part of the Contract Documents. Bidder may not rely upon the accuracy of the non-technical data, interpretations or opinions contained in those reports and drawings. Bidder may not rely on the completeness of those reports and drawings for the purposes of bidding or

construction. Bidder may rely on any technical data contained in those reports and drawings specifically referenced in Division 1: General Requirements as technical data that can be relied on.

4.3. Information and data reflected in the Contract Documents with respect to Underground Facilities at or contiguous to the site is based upon information and data furnished to Owner and Engineer by owners of such Underground Facilities or others, and Owner does not assume responsibility for the accuracy or completeness thereof unless it is expressly provided otherwise in the Supplementary Conditions.

4.4. Provisions concerning responsibilities for the adequacy of data furnished to prospective Bidders on subsurface conditions, Underground Facilities and other physical conditions, and possible changes in Contract Documents due to differing conditions appear in Paragraphs 5.03 and 5.05 of the General Conditions.

4.5. Before submitting a Bid, each Bidder will, at Bidder's own expense, be responsible to make or obtain such examinations, investigations, explorations, tests and studies and obtain any additional information and data which pertain to the physical conditions (surface, subsurface and Underground Facilities) at or contiguous to the site or otherwise which may affect cost, progress, performance or furnishing of the Work and which Bidder deems necessary to determine its Bid for performing and furnishing the Work in accordance with the time, price and other terms and conditions of the Contract Documents.

4.6. On request in advance, Owner will provide each Bidder access to the site to conduct such explorations and tests as each Bidder deems necessary for submission of a Bid. Bidder shall fill all holes, clean up and restore the site to its former condition upon completion of such explorations.

4.7. The lands upon which the Work is to be performed, rights-of-way and easements for access thereto and other lands designated for use by Contractor in performing the Work are identified in the Contract Documents. All additional lands and access thereto required for temporary construction facilities or storage of materials and equipment are to be provided by Contractor. Easements for permanent structures or permanent changes in existing structures are to be obtained and paid for by Owner unless otherwise provided in the Contract Documents.

4.8. The submission of a Bid will constitute an incontrovertible representation by Bidder that Bidder has complied with every requirement of this Article 4, that without exception the Bid is premised upon performing and furnishing the Work required by the Contract Documents and such means, methods, techniques, sequences or procedures of construction as may be indicated in or required by the Contract Documents, and that the Contract Documents are sufficient in scope and detail to indicate and convey understanding of all terms and conditions for performance and furnishing of the Work.

5. INTERPRETATIONS AND ADDENDA.

5.1. All questions about the meaning or intent of the Contract Documents are to be directed to Engineer (unless another issuing office is designated in the Advertisement or Invitation to Bid). Interpretations or clarifications considered necessary by Engineer in response to such questions will be issued by Addenda mailed or delivered to all parties recorded by issuing office as having received the Bidding Documents. Questions received less than five days prior to the date for opening of Bids may not be answered. Only questions answered by formal written Addenda will be binding. Oral and other interpretations or clarifications will be without legal effect.

5.2. Addenda may also be issued to modify the Bidding Documents as deemed advisable by Owner or Engineer.

6. BID SECURITY.

6.1. Each Bid must be accompanied by Bid security made payable to Owner in an amount of five percent of the Bidder's maximum Bid price and in the form of a certified or bank check or a Bid Bond issued by a surety meeting the requirements of Paragraph 6.01 of the General Conditions.

6.2. The Bid security of the Successful Bidder will be retained until such Bidder has executed the Agreement and furnished the required contract security, whereupon the Bid security will be returned. If

the Successful Bidder fails to execute and deliver the Agreement and furnish the required contract security within fifteen days after the Notice of Award, Owner may annul the Notice of Award and the Bid security of the Bidder will be forfeited. The Bid security of other Bidders whom Owner believes to have a reasonable chance of receiving the award may be retained by Owner until the earlier of the seventh day after the Effective Date of the Agreement or the 120th day after the Bid opening, whereupon Bid security furnished by such Bidders will be returned. Bid security with Bids which are not competitive will be returned within seven days after the Bid opening.

7. CONTRACT TIME.

The numbers of days within which, or the dates by which, the Work is to be substantially completed and also completed and ready for final payment (the Contract Time) are set forth in the Bid Form and the Agreement. If Contract Times are left blank in the Bid Form, the time for Substantial Completion and final completion are to be set forth by Bidder in the Bid and will be included in the Agreement. The times will be taken into consideration by Owner during the evaluation of Bids, and it will be necessary for the Successful Bidder to satisfy Owner of Bidder's ability to achieve Substantial Completion and final completion within the times designated in the Bid.

8. LIQUIDATED DAMAGES.

Provisions for liquidated damages, if any, are set forth in the Agreement.

9. SUBSTITUTE OR "OR-EQUAL" ITEMS.

The contract, if awarded, will be on the basis of materials and equipment described in the Drawings or specified in the Specifications without consideration of possible substitute or "or-equal" items. Whenever it is indicated in the Drawings or specified in the Specifications that a substitute or "or-equal" item of material or equipment may be furnished or used by Contractor if acceptable to Engineer, application for such acceptance will not be considered by Engineer until after the Effective Date of the Agreement. The procedure for submission of any such application by Contractor and consideration by Engineer is set forth in Article 7 of the General Conditions and may be supplemented in Division 1: General Requirements.

10. SUBCONTRACTORS, SUPPLIERS AND OTHERS.

10.1. If the Bid Form or Specifications require (or if Owner requests after Bids are received) the identity of certain Subcontractors, Suppliers and other persons and organizations (including those who are to furnish the principal items of material and equipment) to be submitted to Owner in advance of the specified date prior to the Effective Date of the Agreement, the apparent Successful Bidder, and any other Bidder so requested, shall within seven days after the Bid opening (or seven days after request by Owner) submit to Owner a list of all such Subcontractors, Suppliers and other persons and organizations proposed for those portions of the Work for which such identification is required. Such list shall be accompanied by an experience statement with pertinent information regarding similar projects and other evidence of qualification for each such Subcontractor, Supplier, person or organization if requested by Owner. Subcontractors shall be required to meet Contractor's liability insurance requirements as established by the General and Supplementary Conditions or be listed as an additional insured on the apparent successful Bidder's policy. If Owner or Engineer after due investigation has reasonable objection to any proposed Subcontractor, Supplier, other person or organization, either may before the Notice of Award is given request the apparent Successful Bidder to submit an acceptable substitute without an increase in Bid price. If apparent Successful Bidder declines to make any such substitution, Owner may award the contract to the next lowest Bidder that proposes to use acceptable Subcontractors, Suppliers and other persons and organizations. The declining to make requested substitutions will not constitute grounds for sacrificing the Bid security of any Bidder. Any Subcontractor, Supplier, other person or organization listed and to whom Owner or Engineer does not make written objection prior to the giving of the Notice of Award will be deemed acceptable to Owner and Engineer subject to revocation of such acceptance after the Effective Date of the Agreement as provided in the General Conditions.

10.2. No Contractor shall be required to employ any Subcontractor, Supplier, other person or organization against whom Contractor has reasonable objection.

11. BID FORM.

- 11.1. The Bid Form is included with the Bidding Documents; additional copies may be obtained from Engineer (or the issuing office).
- 11.2. All blanks on the Bid Form must be completed in ink or by typewriter.
- 11.3. Bids by corporations must be executed in the corporate name by the president or a vice-president (or other corporate officer accompanied by evidence of authority to sign) and the corporate seal must be affixed and attested by the secretary or an assistant secretary. The corporate address and state of incorporation must be shown below the signature.
- 11.4. Bids by partnerships must be executed in the partnership name and signed by a general partner, whose title must appear under the signature and the official address of the partnership must be shown below the signature.
- 11.5. All names must be typed or printed below the signature.
- 11.6. The Bid shall contain an acknowledgement of receipt of all Addenda (the numbers of which must be filled in on the Bid Form). All Addenda are a part of the Bid documents and each Bidder will be bound by such Addenda, whether or not received by the Bidder. It is the responsibility of each Bidder to verify that he or she has received all Addenda issued before Bids are opened.
- 11.7. The address and telephone number for communications regarding the Bid must be shown.

12. SUBMISSION OF BIDS.

Bids shall be submitted at the time and place indicated in the Advertisement or Invitation to Bid and shall be enclosed in an opaque sealed envelope, marked with the Project title (and, if applicable, the designated portion of the Project for which the Bid is submitted) and name and address of the Bidder and accompanied by the Bid security and other required documents. If the Bid is sent through the mail or other delivery system the sealed envelope shall be enclosed in a separate envelope with the notation "BID ENCLOSED FOR (insert project name) TO BE OPENED (insert date and time as indicated in the Invitation to Bid or subsequent addenda)" on the face of it.

13. MODIFICATION AND WITHDRAWAL OF BIDS.

- 13.1. Bids may be modified or withdrawn by an appropriate document duly executed (in the manner that a Bid must be executed) and delivered to the place where Bids are to be submitted at any time prior to the opening of Bids.
- 13.2. If, within twenty-four hours after Bids are opened, any Bidder files a duly signed, written notice with Owner and promptly thereafter demonstrates to the reasonable satisfaction of Owner that there was a material and substantial mistake in the preparation of its Bid, that Bidder may withdraw its Bid and the Bid security will be returned. Thereafter, that Bidder will be disqualified from further bidding on the Work to be provided under the Contract Documents.

14. OPENING OF BIDS.

Bids will be opened (publicly or privately) as indicated in the Invitation to Bid.

- 14.1. When Bids are opened publicly they will be read aloud, and the amounts of the base Bids and major alternates (if any) will be made available after the opening of Bids. If applicable, the bid will be opened in accordance with sec. 255.0518, Florida Statutes.
- 14.2. When Bids are opened privately, an abstract of the same information (will or will not) be made available to Bidders within seven days after the date of Bid opening.

15. BIDS TO REMAIN SUBJECT TO ACCEPTANCE.

All bids will remain subject to acceptance for 120 days after the day of the Bid opening, but Owner may, in its sole discretion, release any Bid and return the Bid security prior to that date.

16. AWARD OF CONTRACT.

16.1. Owner reserves the right to reject any and all Bids, to waive any and all informalities not involving price, time or changes in the Work and to negotiate contract terms with the Successful Bidder, and the right to disregard all nonconforming, nonresponsive, unbalanced or conditional Bids. Also, Owner reserves the right to reject the Bid of any Bidder if Owner believes that it would not be in the best interest of the Project to make and award to the Bidder, whether because the Bid is not responsive or the Bidder is unqualified or of doubtful financial ability or fails to meet any other pertinent standard or criteria established by Owner. Discrepancies in the multiplication of units of Work and unit prices will be resolved in favor of the unit prices. Discrepancies between the indicated sum of any column of figures and the correct sum thereof will be resolved in favor of the correct sum.

16.2. In evaluating Bids, Owner will consider the qualifications of the Bidders, whether or not the Bids comply with the prescribed requirements, and such alternates, unit prices and other data, as may be requested in the Bid Form or prior to the Notice of Award.

16.3. Owner may consider the qualifications and experience of Subcontractors, Suppliers and other persons and organizations proposed for those portions of the Work as to which the identity of Subcontractors, Suppliers, and other persons and organizations must be submitted as provided in the Supplementary Conditions (or as requested by Owner after the Bids are received). Owner also may consider the operating costs, maintenance requirements, performance data and guarantees of major items of materials and equipment proposed for incorporation in the Work when such data is required to be submitted prior to the Notice of Award.

16.4. Owner may conduct such investigations as Owner deems necessary to assist in the evaluation of any Bid and to establish the responsibility, qualifications and financial ability of Bidders, proposed Subcontractors, Suppliers, and other persons and organizations to perform and furnish the Work in accordance with the Contract Documents to Owner's satisfaction within the prescribed time.

16.5. If the contract is to be awarded, it will be awarded to the lowest, responsive and responsible Bidder whose evaluation by Owner indicates to Owner that the award will be in the best interests of the Project and subject to the Owners Local Preference Policy. No bid shall be accepted from, nor will any Contract be awarded to any Bidder who is in arrears to the Owner upon any debt or Contract or who is a defaulter as surety or otherwise upon any obligation to the Owner or who has failed to perform faithfully any previous Contract with the Owner or other party as determined by the Owner.

16.6. If the contract is to be awarded, Owner will give the Successful Bidder a Notice of Award within 120 days after the day of the Bid opening.

16.7. When Bidder is permitted to designate the Contract Time, Bid prices will be compared after adjusting for differences in the time designated in the Bid for Substantial Completion.

17. CONTRACT SECURITY.

Paragraph 6.01 of the General Conditions and the Supplementary Conditions set forth Owner's requirements as to performance and payment Bonds. When the Successful Bidder delivers the executed Agreement to Owner, it must be accompanied by the required performance and payment Bonds.

18. SIGNING OF AGREEMENT.

When Owner gives a Notice of Award to the Successful Bidder, it will be accompanied by the required number of unsigned counterparts of the Agreement with all other written Contract Documents attached. Within 15 days thereafter Contractor shall sign and deliver the required number of counterparts of the Agreement and attached documents to Owner with the required Bonds. In the event the successful Bidder fails to execute the Contract and return same to the Owner within the stipulated fifteen (15) days, the Owner may disqualify the Bid, and said Bidder shall not be permitted to contest to the contrary and does waive such right upon submitting a Bid.

19. DISQUALIFICATION OF BIDDER

19.1 Bidder may be disqualified and its Bid rejected for any of the following:

- a) Bidder does not meet the Competency of Bidder and Reference requirements set forth herein.
- b) Reason to believe that collusion exists among or between Bidders
- c) Unbalanced Bid; that is, Bid in which the prices bid for some items are out of all proportion to those Bids of others.
- d) Bidder's uncompleted workload, which in the judgment of the Owner, may cause detrimental impact or impair the prompt completion of this Contract.
- e) Lack of responsibility on the part of Bidder, (for example, no Bidder would be considered responsible who had failed to carry out any Contract in which the Owner had been directly or indirectly concerned), or to which Bidder failed to perform on other projects.
- f) A determination by Owner of the Contractor's lack of experience or lack of competency as may be revealed by qualification statements, financial statements, experience records, references, or other questionnaires.
- g) Substantial evidence of bad character or dishonesty.
- h) Bidder is involved in any current litigation with Owner.
- i) Bidder has defaulted on any contract or is in arrears on any contract.

20. LICENSES, PERMITS, AND CERTIFICATION

20.1 When applicable, vendor must hold a Certificate of Competency issued by the State of Florida or the Palm Beach County Construction Industry Licensing.

20.2 A business tax receipt obtained from the Owner shall be required of any person maintaining a permanent business location or branch office within the City of Lake Worth.

20.3 A copy of any licenses and permits shall be submitted with the Bid and must be in the name of the vendor shown on the Bid submittal.

21. PREPARATION EXPENSE

21.1 Neither the Owner nor its representatives will be liable for any expenses incurred in connection with the preparation, presentation or submittal of any Bid.

22. NON-COLLUSION

22.1 Bidder certifies that this Bid is made without prior understanding, agreement, or connection with any individual, firm, partnership, corporation or other entity submitting a Bid for the same materials, services, supplies, or equipment and is in all respects fair and without collusion or fraud. No premiums, rebates, or gratuities are permitted with, prior to, or after any delivery of material or

provisions of services. Any violation of this provision may result in Contract cancellation, return of materials or discontinuation of services, and the possible removal of Bidder from the vendor Bid list(s).

23. CODE OF ETHICS

23.1 If any Bidder violates or is a party to a violation of the Code of Ethics of the Owner, Palm Beach County, and/or of the State of Florida with respect to this Bid, such Bidder may be disqualified from performing the work described in this Bid or from furnishing the goods or services for which this Bid is submitted and may be further disqualified from bidding on any future Bids for work or for goods or services for the Owner.

24. CONFLICT OF INTEREST

24.1 The award is subject to any and all applicable conflict of interest provisions found in the policies or Code of Ordinances of the City, the Palm Beach County Code of Ethics, and found in the Florida Statutes. All Bidders must complete the Conflict of Interest Form attached hereto.

25. DRUG FREE WORKPLACE PROGRAMS

25.1 Preference may be given to businesses with Drug-Free Work Place Programs. Whenever two or more Bids which are equal with respect to price, quality, and service are received by the Owner for the procurement of commodities or contractual services, a Bid received from a business that completes the attached DFW form certifying that it is a DFW may be given preference in the award process.

26. LEGAL REQUIREMENTS

26.1 Federal, State, County and Owner laws, ordinances, rules, codes, guidelines, directives and regulations that in any manner affect the items covered herein apply. Lack of knowledge by the Bidder shall in no way be a cause for relief from responsibility.

27. COMPLIANCE WITH OCCUPATIONAL SAFETY AND HEALTH ACT

27.1 The Bidder certifies that all equipment and materials contained in this Bid shall meet all O.S.H.A. requirements. Bidder further certifies that, if it is the successful Bidder and the equipment and/or materials delivered are subsequently found to be deficient in any O.S.H.A. requirements in effect on the date of delivery, all costs necessary to bring the equipment and/or materials into compliance with the aforementioned requirements shall be borne by the Bidder.

28. NON-APPROPRIATIONS

28.1 The obligations of the Owner to make a Bid award and sign an agreement under the terms of this "Invitation to Bid" are contingent upon funds lawfully appropriated for this purpose. Should funds not be appropriated for this purpose, the Owner, at its sole discretion, shall have the right to reject all Bids.

29. FLORIDA PUBLIC RECORDS ACT AND CONTRACT CONTENT OWNERSHIP

29.1 All material submitted regarding this Bid becomes the property of the Owner. Pursuant to sec. 119.07(1), Fla. Stat., sealed Bids received by the Owner pursuant to a competitive solicitation are subject to disclosure when the Owner provides notice of an intended decision or until thirty (30) after opening of the Bids, whichever is earlier. If the Owner rejects all bids submitted in response to a competitive solicitation and the Owner concurrently provides notice of its intent to reissue the competitive solicitation, the rejected bids remain exempt from sec. 119.07(1), Fla. Stat., until such time as the Owner provides notice of an intended decision concerning the reissued competitive solicitation or until the Owner withdraws the reissued competitive solicitation. A Bid is not exempt from disclosure for longer than 12 months after the initial notice rejecting all Bids made by the Owner. Bidder should take special note of this as it relates to any proprietary information that might

be included in their offer. Any resulting contract may be reviewed by any person after the contract has been executed by the Owner. The Owner has the right to use any or all information/material submitted in response to this bid and/or any resulting contract from the same. Disqualification of a Bidder does not eliminate this right.

29.2 Contractor shall comply with Florida's Public Records Laws, and, if applicable, specifically agrees to:

- a) Keep and maintain public records that ordinarily and necessarily would be required by the Owner in order to perform the service.
- b) Provide the public with access to public records on the same terms and conditions that the Owner would provide the records and at a cost that does not exceed the cost provided in Chapter 119, Florida Statutes, or as otherwise provided by law.
- c) Ensure that public records that are exempt or confidential and exempt from public records disclosure requirements are not disclosed except as authorized by law.
- d) Meet all requirements for retaining public records and transfer, at no cost, to the Owner all public records in possession of the Contractor upon termination of the Contract Documents and destroy any duplicate public records that are exempt or confidential and exempt from public records disclosure requirements. All records stored electronically must be provided to the Owner in a format that is compatible with the information technology systems of the Owner.

END OF SECTION

BID FORM MUST BE SUBMITTED IN DUPLICATE

BIDDER: _____

PROJECT: Surficial Aquifer Test Well TW-17
for City of Lake Worth

DATE: _____
(Bid Submitted on)

**00300
BID FORM**

THIS BID IS SUBMITTED TO:

1. The undersigned BIDDER proposes and agrees, if this Bid is accepted, to enter into an Agreement with OWNER in the form included in the Contract Documents to perform and furnish all Work as specified or indicated in the Contract Documents for the Contract Price and within the Contract Time indicated in this Bid and in accordance with the other terms and conditions of the Contract Documents.

2. BIDDER accepts all of the terms and conditions of the Advertisement or Invitation to Bid and Instructions to Bidders, including without limitation those dealing with the disposition of Bid security. This Bid will remain subject to acceptance for 120 days after the day of Bid opening. BIDDER will sign and submit the Agreement with the Bonds and other documents required by the Bidding Requirements within 15 days after the date of OWNER's Notice of Award.

3. In submitting this Bid, BIDDER represents, as more fully set forth in the Agreement, that:

(a) BIDDER has examined copies of all the Bidding Documents and of the following Addenda (receipt of all which is hereby acknowledged):

Date	Number
------	--------

(b) BIDDER has familiarized itself with the nature and extent of the Contract Documents, Work, site, locality, and all local conditions and Laws and Regulations that in any manner may affect cost, progress, performance or furnishing of the Work.

(c) BIDDER has studied carefully all reports and drawings of subsurface conditions and drawings of physical conditions which are identified in the Division 1: General Requirements as provided in paragraph 5.03 of the Supplementary Conditions, and accepts the determination set forth in Division 1: General Conditions of the extent of the technical data contained in such reports and drawings upon which BIDDER is entitled to rely.

(d) BIDDER has obtained and carefully studied (or assumes responsibility for obtaining and carefully studying) all such examinations, investigations, explorations, tests and studies (in addition to or to supplement those referred to in (c) above) which pertain to the subsurface or physical conditions at the site or otherwise may affect the cost, progress, performance or furnishing of the Work as BIDDER considers necessary for the performance or furnishing of the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents, including specifically the provisions of paragraph 5.03 of the General Conditions, as amended by the Supplementary Conditions; and no additional examinations, investigations, explorations, tests, reports or similar information or data are or will be required by BIDDER for such purposes.

- (e) BIDDER has reviewed and checked all information and data shown or indicated on the Contract Documents with respect to existing Underground Facilities at or contiguous to the site and assumes responsibility for the accurate location of said Underground Facilities. No additional examinations, investigations, explorations, tests, reports or similar information or data in respect of said Underground Facilities are or will be required by BIDDER in order to perform and furnish the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents, including specifically the provisions of paragraph 5.05 of the General Conditions.
- (f) BIDDER has correlated the results of all such observations, examinations, investigations, explorations, tests, reports and studies with the terms and conditions of the Contract Documents.
- (g) BIDDER has given ENGINEER written notice of all conflicts, errors or discrepancies that it has discovered in the Contract Documents and the written resolution thereof by ENGINEER is acceptable to BIDDER.
- (h) This Bid is genuine and not made in the interest of or on behalf of any undisclosed person, firm or corporation and is not submitted in conformity with any agreement or rules of any group, association, organization or corporation; BIDDER has not directly or indirectly induced or solicited any other Bidder to submit a false or sham Bid; BIDDER has not solicited or induced any person, firm or corporation to refrain from bidding; and BIDDER has not sought by collusion to obtain for itself any advantage over any other Bidder or over OWNER.

4. BIDDER agrees to perform all the Work described in Contract Documents, subject to adjustments as provided therein, for the Prices BIDDER provides on the Unit Price Schedule (Page 00300– 5):

5. BIDDER declares it understands that the unit quantities shown on the Bid Form Unit Price Schedule are approximate only and not guaranteed and are subject to either increase or decrease; and that should the quantities of any of the items of Work be increased, the BIDDER agrees to do the additional Work at the unit prices set out herein, and should the quantities be decreased, BIDDER also understands that final payment shall be made on actual quantities completed at the unit prices, and shall make no claims for anticipated profits for any decrease in the quantities.

6. The BIDDER further declares it understands the OWNER may elect to construct only a portion of the Work covered by these Documents and BIDDER agrees to perform that portion of the Work for which BIDDER is awarded a Contract at the unit prices quoted herein.

7. BIDDER agrees that the Work:

will be substantially complete within 120 calendar days after the date when the Contract Time commences to run as provided in paragraph 4.01 of the General Conditions, and completed and ready for final payment within 150 calendar days after the date when the Contract Time commences to run.

BIDDER accepts the provisions of the Agreement as to liquidated damages in the event of failure to complete the Work on time.

8. The following documents are attached to and made a condition of this Bid:

- (a) Required Bid Security in the form of _____.
- (b) Unit Price Schedule (Page(s) 00300-5).
- (c) Trench Safety Affidavit (Page(s) 00300-6).
- (d) Schedule of Subcontractors (Page(s) 00300-7)
- (e) Schedule of Suppliers, Equipment and Materials (Page(s) 00300-8)

(f) Sworn Statements Under Section 287.133(3)(a), Florida Statutes, on Public Entity Crimes (Page(s) 00300-9 and 00300-10).

(g) (List other documents as pertinent): Certification of Drug Free Workplace Program (Page(s) 00300-11).

9. Communications concerning this Bid shall be telephoned or addressed to:

The phone number and address of BIDDER indicated below.

10. The terms used in this Bid which are defined in the General Conditions of the Construction Contract included as part of the Contract Documents have the meanings assigned to them in the General Conditions.

11. BIDDER's Florida Contractor's License No. _____.

12. BIDDER covenants that it is qualified to do business in the State of Florida and has attached evidence of BIDDER's qualification to do business in the State of Florida, or if not attached, BIDDER covenants to obtain such evidence within five days of request by OWNER to provide evidence.

13. BIDDER represents that it is financially solvent and sufficiently experienced and competent to provide all goods and services required under this IFB and that all information provided in the Bid is true and correct in all respects.

14. If BIDDER is:

An Individual

By _____ (SEAL)
(Individual's Name)

(Signature)

doing business as _____

Business address: _____

Phone No. : _____

A Partnership

By _____ (SEAL)
(Firm Name)

(General Partner) (Signature)

Business address: _____

Phone No. : _____

A Corporation

By _____ (SEAL)
(Corporation Name)

(State of Incorporation)

By _____
(Name of Person Authorized to Sign)

(Title)

(Signature)

(Corporate Seal)

Attest _____
(Secretary)

(Signature)

Business address: _____

Phone No. : _____

**Surficial Aquifer Test Well TW-17
Unit Price Schedule**

Item Description	Qty	Unit	Unit Price	Amount
1. Bonds and Insurance	1	LS		\$ _____
2. Mobilization/Demobilization/General Conditions	1	LS		\$ _____
3. General Allowance	1	LS		\$ 5,000.00
4. Drill Nominal 8-inch diameter Pilot Hole to 300 Fee	300	FT	\$ _____	\$ _____
5. Geophysical Logging	1	LS		\$ _____
6. Furnish and install 4-inch diameter test well casing and screen to a depth of approx. 300 feet, including gravel pack	300	FT	\$ _____	\$ _____
7. Perform Test Well Development and Interval Sampling including analysis	6	EA	\$ _____	\$ _____
8. Convert 4-inch Test Well to 2-inch Monitor Well; Furnish and install new 2-inch diameter monitor well casing and screen to a depth of 230 feet, including gravel pack and development	1	LS		\$ _____
9. Final Wellhead, Well Pad and Bollard	1	LS		\$ _____
10. Site Restoration	1	LS		\$ _____
		Total		\$ _____

PROJECT NO:

TRENCH SAFETY AFFIDAVIT

(FAILURE TO COMPLETE THIS FORM MAY RESULT IN THE BID BEING DECLARED NON-RESPONSIVE)

_____ (NAME OF CONTRACTOR) hereby provides written assurance that compliance with applicable Trench Safety Standards identified in the Occupational Safety & Health Administration's Excavation Safety Standards, (OSHA) 29 C.F.R.S. 1926.650 Subpart P will be adhered to during trench excavation in accordance with Florida Statutes 553.60 through 553.64 inclusive (1990), "Trench Safety Act".

The undersigned acknowledges that included in the various items of the proposal and in the Total Bid Price are costs for complying with the Florida "Trench Safety Act" as summarized below: (Attach additional sheets as necessary)

Schedule Item	Trench Safety Measure (Slope, Trench Shield, etc.	Cost
		\$
		\$
		\$
		\$
		\$
		\$
		\$
	Total	\$

 (Signature) (date)

STATE OF _____
 COUNTY OF _____

Subscribed and Sworn to (or affirmed) before me on _____ (date) by
 _____ (name). He/she is personally known to me or has
 presented _____ (type of identification) as identification.

 Notary Public Signature and Seal

 Print Notary Name and Commission No.

SCHEDULE OF MAJOR SUBCONTRACTORS

List Proposed Major Subcontractors

Category of Work

SCHEDULE OF MAJOR EQUIPMENT AND MATERIALS

Description	Manufacturer	Model
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

**SWORN STATEMENT UNDER SECTION 287.133(3)(a),
FLORIDA STATUTES, ON PUBLIC ENTITY CRIMES**

THIS FORM MUST BE SIGNED IN THE PRESENCE OF A NOTARY PUBLIC OR OTHER OFFICER AUTHORIZED TO ADMINISTER OATHS.

1. This sworn statement is submitted to _____
by _____ [print name of the public entity]
by _____ [print individual's name and title]
for _____ [print name of entity submitting sworn statement]

whose business address is _____

and (if applicable) its Federal Employer Identification Number (FEIN) is _____

(If the entity has no FEIN, include the Social Security Number of the individual signing this sworn statement: _____.)

2. I understand that a "public entity crime" as defined in Paragraph 287.133(1)(g), Florida Statutes, means a violation of any state or federal law by a person with respect to and directly related to the transaction of business with any public entity or with an agency or political subdivision of any other state or of the United States, including, but not limited to, any bid or contract for goods or services to be provided to any public entity or an agency or political subdivision of any other state or of the United States and involving antitrust, fraud, theft, bribery, collusion, racketeering, conspiracy, or material misrepresentation.
3. I understand that "convicted" or "conviction" as defined in Paragraph 287.133(1)(b), Florida Statutes, means a finding of guilt or a conviction of a public entity crime, with or without an adjudication of guilt, in any federal or state trial court of record relating to charges brought by indictment or information after July 1, 1989, as a result of jury verdict, nonjury trial, or entry of a plea of guilty or nolo contendere.
4. I understand that an "affiliate" as defined in Paragraph 287.133(1)(a), Florida Statutes, means:
1. A predecessor or successor of a person convicted of a public entity crime; or
 2. An entity under the control of any natural person who is active in the management of the entity and who has been convicted of a public entity crime. The term "affiliate" includes those officers, directors, executives, partners, shareholders, employees, members, and agents who are active in the management of an affiliate. The ownership by one person of shares constituting a controlling interest in another person, or a pooling of equipment or income among persons when not for fair market value under an arm's length agreement, shall be a prima facie case that one person controls another person. A person who knowingly enters into a joint venture with a person who has been convicted of a public entity crime in Florida during the preceding 36 months shall be considered an affiliate.
5. I understand that a "person" as defined in Paragraph 287.133(1)(c), Florida Statutes, means any natural person or entity organized under the laws of any state or of the United States with the legal power to enter into a binding contract and which bids or applies to bid on contracts for the provision of goods or services let by a public entity, or which otherwise transacts or applies to transact business with a public entity. The term "person" includes those officers, directors, executives, partners, shareholders, employees, members, and agents who are active in management of an entity.

6. Based on information and belief, the statement which I have marked below is true in relation to the entity submitting this sworn statement. [Please indicate which statement applies.]

_____ Neither the entity submitting this sworn statement, nor any officers, directors, executives, partners, shareholders, employees, members, or agents who are active in management of the entity, nor any affiliate of the entity has been charged with and convicted of a public entity crime subsequent to July 1, 1989.

_____ The entity submitting this sworn statement, or one or more of the officers, directors, executives, partners, shareholders, employees, members, or agents who are active in management of the entity, or an affiliate of the entity has been charged with and convicted of a public entity crime subsequent to July 1, 1989.

_____ The entity submitting this sworn statement, or one or more of its officers, directors, executives, partners, shareholders, employees, members, or agents who are active in the management of the entity, or an affiliate of the entity has been charged with and convicted of a public entity crime subsequent to July 1, 1989. However, there has been a subsequent proceeding before a Hearing Officer of the State of Florida, Division of Administrative Hearings and the Final Order entered by the Hearing Officer determined that it was not in the public interest to place the entity submitting this sworn statement on the convicted vendor list. [attach a copy of the final order]

I UNDERSTAND THAT THE SUBMISSION OF THIS FORM TO THE CONTRACTING OFFICER FOR THE PUBLIC ENTITY IDENTIFIED IN PARAGRAPH 1 (ONE) ABOVE IS FOR THAT PUBLIC ENTITY ONLY AND, THAT THIS FORM IS VALID THROUGH DECEMBER 31 OF THE CALENDAR YEAR IN WHICH IT IS FILED. I ALSO UNDERSTAND THAT I AM REQUIRED TO INFORM THE PUBLIC ENTITY PRIOR TO ENTERING INTO A CONTRACT IN EXCESS OF THE THRESHOLD AMOUNT PROVIDED IN SECTION 287.017, FLORIDA STATUTES FOR CATEGORY TWO OF ANY CHANGE IN THE INFORMATION CONTAINED IN THIS FORM.

[signature]

[date]

STATE OF _____

COUNTY OF _____

Subscribed and Sworn to (or affirmed) before me on _____ by _____
[date]
_____. He/she is personally known to me or has presented
[name]
_____ as identification.
[type of identification]

[Notary's Signature and Seal]

Print Notary Name and Commission No.

Form PUR 7068 (Rev. 04/10/91)
M/R 03/06/92

CERTIFICATION OF DRUG FREE WORKPLACE PROGRAM

I certify the firm of _____ maintains a drug-free workplace program, and that the following conditions are met:

1. We publish a statement notifying employees that the unlawful manufacturer, distribution, dispensing, possession, or use of a controlled substance is prohibited in the workplace and specifying that actions will be taken against employees for violations of such prohibitions.
2. We inform employees about the dangers of drug abuse in the workplace, the company's policy of maintaining a drug-free workplace, any available drug counseling, rehabilitation, and employee assistance programs, and the penalties that may be imposed upon employees for drug abuse violations.
3. We give each employee engaged in providing the commodities or contractual services that are under bid a copy of the statement specified in subsection one (1).
4. In the statement specified subsection one (1) we notify the employee that; a condition of working in the commodities or contractual services that are under bid, the employee will abide by the terms of the statement and will notify the employer of any conviction of, or plea of guilty nolo contendere to any violation of Chapter 893 or of any controlled substance law of the United States or any state, for a violation occurring in the workplace no later than five (5) days after such conviction.
5. We impose a sanction on, or require the satisfactory participation in a drug abuse assistance or rehabilitation program if such is available in the employee's community, by any employee who is convicted.
6. We make a good faith effort to continue to maintain a drug-free workplace through implementation of this section.

As the person authorized to sign the statement, I certify that this firm complies fully with the above requirements.

Contractor's Signature

BIDDERS'S QUALIFICATION QUESTIONNAIRE

(Include in Bid sEnvelope)

THE UNDERSGINED GUARANTEES THE TRUTH AND ACCURACY OF ALL STATEMENTS AND ANSWERS HEREIN CONTAINED:

- A. Any information judged by OWNER OR ENGINEER to be false is grounds for rejection of Bid and Cost Proposal. (Use additional sheets as required to provide the required information.)

- B. The individual who holds the Well Drilling License shall be active in the management and ownership of the firm awarded the work and be available to provide their expertise for the project on an ongoing-basis. Provide the name of this individual for the complete duration of this project.

- 1a. State the numbers of years your organization has been doing business in Florida.

- 1b. State the numbers of years your organization has been doing business as a Licensed Well Driller in Florida. _____

- 2a. We normally perform _____% of the work with our own forces.

List trades below: _____

- 3. Have you ever failed to complete work awarded to you? If so, state where when and why

- 4. BIDDER shall have constructed at least ten Surficial Aquifer supply wells within the past five years.

Project Name: _____

Contract Amount: _____

Owner: _____ Phone No: _____

Consultant /Engineer _____ Phone No. _____

Owner Contact: _____ Phone No. _____

Type of Well (details): _____

Total Depth: _____

Date Completed: _____

Contract Schedule (days): _____

Actual Completion Schedule: _____

5. BIDDER shall demonstrate the ability to complete projects on time within the contract completion dates. List ALL within the last three years (started, underway, or completed):

Project: _____

Contract Schedule (days) _____

Actual Completion Schedule (days) _____

6. List ALL projects within the past five years (started, underway, or completed) in which liquidated damages (LD) were incurred, either directly or indirectly:

Project: _____

LD Amount: _____

LD Unit Price: _____

7. BIDDER shall demonstrate the proficiency in the performance of the following activities. Please provide specific experience with Surficial Aquifer supply wells over the past five years (started, underway and completed). Include the names and experience of subcontractors as applicable.

Well Cementing: _____

Geophysical Logging: _____

Surface and Piping Facilities: _____

8. BIDDER shall specifically name proposed superintendents and drillers to be utilized on this project and identify years of experience in well drilling and quantity of wells

completed by the proposed superintendents and drillers within the previous five years. It must be demonstrated that the experience is with the current bidder.

Name: _____

Position: _____

Years of Experience with BIDDER: _____

Type of Work Responsible For: _____

License: _____

9. BIDDER shall identify below the information regarding last similar project the rig was utilized on:

Project: _____

Owner: _____ Phone No: _____

Completion Date: _____

10. BIDDER shall provide information related to the job safety and safety rating of the corporation: _____

11. Please attach copies of your most recent audited financial statement.

12.

(a) Please state your bonding capacity per project. _____

(b) Please state your total bonding capacity. _____

(c) Please provide name, address and contact person of your bonding company.

13. State the true, exact, correct and complete name of the partnership, corporation or trade name under which you do business. (If corporation, state the name of the president and secretary. If a partnership, state the name of all partners. If a trade name, state the name of the individuals who do business under the trade name).

- (a) The business is a _____
- (b) The address of the principal place of business is: _____
- (c) The name of the corporate officers, or partners, or individuals doing business under a trade name are as follows:

If a Corporation, attach a copy of the most recent good standing certificate issued by the Secretary of State of Florida.

Date _____

Bidder: _____

By: _____

Title: _____

Mailing Address: _____

END OF BIDDER'S QUALIFICATION QUESTIONNAIRE

00500
AGREEMENT

THIS AGREEMENT is dated and will be effective on the _____ day of _____ in the year 20____, by and between the City of Lake Worth (hereinafter called Owner) and _____ (hereinafter called Contractor).

Owner and Contractor, in consideration of the mutual covenants hereinafter set forth, agree as follows:

ARTICLE 1. WORK.

Contractor shall complete all Work as specified or indicated in the Contract Documents. The Work is generally described as follows: Drilling Surficial Aquifer Test Well TW-17.

ARTICLE 2. ENGINEER

The Project has been designed by Mock, Roos & Associates, Inc., who is hereinafter called Engineer and who is to act as Owner's representative, assume all duties and responsibilities and have the rights and authority assigned to Engineer in the Contract Documents in connection with completion of the Work in accordance with the Contract Documents.

ARTICLE 3. CONTRACT TIME.

3.1 The Work will be substantially completed within 120 days from the date when the Contract Time commences to run as provided in paragraph 4.01 of the General Conditions and shall be finally complete and ready for final payment in accordance with paragraph 15.06 of the General Conditions within 150 days from the date when the Contract Time commences to run.

3.2 All time limits for Milestones, if any, Substantial Completion and completion and readiness for final payment as stated in the Contract Documents are of the essence of the Contract.

3.3 LIQUIDATED DAMAGES. Owner and Contractor recognize that time is of the essence of this Agreement and that Owner will suffer financial loss if the Work is not completed within the times specified in paragraph 3.1 above, plus any extensions thereof allowed in accordance with the Contract Documents. They also recognize the delays, expense and difficulties involved in proving in a legal or arbitration proceeding the actual loss suffered by Owner if the Work is not completed on time. Accordingly, instead of requiring any such proof, Owner and Contractor agree that as liquidated damages for delay (but not as a penalty) Contractor shall pay Owner Five Hundred and 00/100 dollars (\$ 500.00) for each day that expires after the time specified in paragraph 3.1 for Substantial Completion until the Work is substantially complete. After Substantial Completion if Contractor shall neglect, refuse or fail to complete the remaining Work within the Contract Time or any proper extension thereof granted by Owner, Contractor shall pay Owner Five Hundred and 00/100 dollars (\$500.00) for each day that expires after the time specified in paragraph 3.1 for completion and readiness for final payment.

3.4 In the Owner's sole discretion, a requested extension of time may be denied for delays resulting from normal weather conditions prevailing from normal weather conditions prevailing in the area as defined by the average of the last five (5) years of weather recorded or otherwise established by the Owner.

ARTICLE 4. CONTRACT PRICE.

4.1 Owner shall pay CONTRACTOR for completion of the Work in accordance with the Contract Documents, subject to adjustment as provided therein, in current funds as follows:

A. For all Unit Price Work, an amount equal to the sum of the extended prices (established for each separately identified item of Unit Price Work by multiplying the unit price times the actual quantity of that item):

TOTAL OF ALL UNIT PRICES _____ (\$ _____)
(use words) (figures)

which is based on the unit price(s) in the Bid Form Unit Price Schedule for Unit Bid Items numbered _____ to _____.

ARTICLE 5. PAYMENT PROCEDURES.

Contractor shall submit Applications for Payment in accordance with Article 15 of the General Conditions. Applications for Payment will be processed by Engineer as provided in the General Conditions.

5.1 PROGRESS PAYMENTS. Owner shall make progress payments on account of the Contract Price on the basis of Contractor's Applications for Payment as recommended by Engineer, on or about the 10th day of each month during construction as provided below. All progress payments will be on the basis of the progress of the Work measured by the schedule of values established in the General Conditions (and in the case of Unit Price Work based on the number of units completed) or, in the event there is no schedule of values, as provided elsewhere in the Contract Documents.

5.1.1 Prior to Substantial Completion, the total of progress payments will be made in an amount equal to the percentage indicated below, but, in each case, less the aggregate of payments previously made and less such amounts as Engineer shall determine, or Owner may withhold, in accordance with the General Conditions, less liquidated damages, if any.

90% of Work completed.
90% of materials and equipment not incorporated in the Work (but delivered, suitably stored and accompanied by documentation satisfactory to Owner as provided in the General Conditions).
95% of the work complete after the Contractor has completed over 50% of the Work.

5.1.2 Upon Substantial Completion, in an amount sufficient to increase total payments to Contractor to 98% of the Contract Price, less such amounts

as Engineer shall determine, or Owner may withhold, in accordance with the General Conditions, less liquidated damages, if any.

5.2 FINAL PAYMENT. Upon final completion and acceptance of the Work in accordance with paragraph 15.06 of the General Conditions, and settlement of all claims, including liquidated damages, if any, Owner shall pay the remainder of the Contract Price as recommended by Engineer as provided in said paragraph 15.06.

ARTICLE 6. INTEREST.

6.1 All payments due and not made within the time prescribed by section 218.735, Florida Statutes, shall bear interest at the rate of 1 percent per month in accordance with section 218.735, Florida Statutes, as amended from time to time.

ARTICLE 7. CONTRACTOR'S REPRESENTATIONS.

In order to induce Owner to enter into this Agreement Contractor makes the following representations:

7.1 Contractor has examined and carefully studied the Contract Documents and any data and reference items identified in the Contract Documents.

7.2 Contractor has visited the Site, conducted a thorough, alert visual examination of the Site and adjacent areas, and become familiar with and is satisfied as to the general, local and Site conditions that may affect cost, progress and performance of the Work.

7.3 Contractor is familiar with and is satisfied as to all Laws and Regulations that may affect cost, progress and performance of the Work.

7.4 Contractor has studied carefully all: (1) reports of explorations and tests of subsurface conditions at or adjacent to the Site and drawings of physical conditions relating to existing surface or subsurface structures at the Site that have been identified in the Supplementary Conditions, especially with respect to Technical data in such reports and drawings, and (2) reports and drawings related to Hazardous Environmental Conditions, if any, at or adjacent to the Site that have been identified in the Supplementary Conditions, especially with respect to Technical data in such reports and drawings. Contractor accepts the determination set forth in the Contract Documents of the extent of the technical data contained in such reports and drawings upon which Contractor is entitled to rely, if any.

7.5 Contractor has obtained and carefully studied (or assumes responsibility for obtaining and carefully studying) all such examinations, investigations, explorations, tests, reports and studies, if any, (in addition to or to supplement those referred to in paragraph 7.4 above) which pertain to the subsurface or physical conditions at or adjacent to the Site or otherwise may affect the cost, progress, performance or furnishing of the Work as Contractor considers necessary for the performance or furnishing of the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents; and no additional examinations, investigations, explorations, tests, reports, studies or similar information or data are or will be required by Contractor for such purposes.

7.6 Contractor has reviewed and checked all information and data shown or indicated on the Contract Documents, if any, with respect to existing Underground Facilities at or adjacent to the

Site and assumes responsibility for the accurate location of said Underground Facilities. No additional examinations, investigations, explorations, tests, reports, studies or similar information or data in respect of said Underground Facilities are or will be required by Contractor in order to perform and furnish the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents.

7.7 Contractor has considered the information known to Contractor itself; information commonly known to contractors doing business in the locality of the Site; information and observations obtained from visits to the Site; the Contract Documents; and the site-related reports and drawings identified in the Contract Documents, with respect to the effect of such information, observations, and documents on (1) the cost, progress and performance of the work; (2) the means, methods, techniques, sequences, and procedures of construction to be employed by Contractor; and (3) Contractor's safety precautions and programs.

7.8 Contractor has correlated the results of all such observations, examinations, investigations, explorations, tests, reports and studies with the terms and conditions of the Contract Documents and based on the information and observations referred to above, the Contractor agrees that no further examinations, investigations, explorations, tests, studies, or data are necessary for the performance of the work at the Contract Price, within the Contract Times, and in accordance with the other terms and conditions of the Contract Documents.

7.9 Contractor has given Engineer written notice of all conflicts, errors or discrepancies that Contractor has discovered in the Contract Documents and the written resolution thereof by Engineer is acceptable to Contractor.

7.10 Contractor acknowledges that the Contract Documents are generally sufficient to indicate and convey an adequate understanding of all terms and conditions for performance and furnishing of the Work.

7.11 Contractor's entry into this Contract constitutes an incontrovertible representation by Contractor that without exception all prices in the Agreement are premised upon performing and furnishing the Work required by the Contract Documents.

7.12 Contractor is aware of the general nature of work to be performed by Owner and others at the Site that relates to the Work as indicated in the Contract Documents.

ARTICLE 8. CONTRACT DOCUMENTS.

The Contract Documents which comprise the entire Agreement between Owner and Contractor concerning the Work consist of the following:

8.1 This Agreement consisting of ___ pages.

8.2 Exhibits to this Agreement identified as:

- a. The Project Manual (pages ___ to ___, inclusive);
- b. Contractor's Bid (pages ___ to ___, inclusive);
- c. Permits (pages ___ to ___, inclusive);
- d. Other: _____

8.3 Performance Bond and Payment Bond consisting of ___ pages (plus Power of Attorney Forms as applicable).

- 8.4 Notice of Award and Notice to Proceed.
- 8.5 General Conditions consisting of 65 pages.
- 8.6 Supplementary Conditions consisting of 6 pages.
- 8.7 Bid documents as listed in the table of contents of the Project Manual.
- 8.8 Specifications consisting of 45 pages.
- 8.9 Drawings not attached hereto but are listed in Section 00860 List of Drawings.
- 8.10 Addenda numbers _____ to _____, inclusive.
- 8.11 Contractor's Bid consisting of _____ pages.
- 8.12 Documentation submitted by Contractor prior to Notice of Award.
- 8.13 The following which may be delivered or issued after the Effective Date of the Agreement and are not attached hereto: All Written Amendments and other documents amending, modifying, or supplementing the Contract Documents pursuant to the General Conditions.
- 8.14 The documents listed under Article 8 above are attached to this Agreement (except as expressly noted otherwise above).
- 8.15 Any other document attached hereto or incorporated herein by the Owner.

There are no Contract Documents other than those listed above in this Article 8. The Contract Documents may only be amended, modified or supplemented as provided in the General Conditions.

Governing Order of Contract Documents - The Contract Documents include various divisions, sections and conditions which are essential parts for the work to be provided by the Contractor. A requirement occurring in one is as binding as though occurring in all. They are intended to be complementary and to describe and provide for a complete work. In case of discrepancy, the following precedence will govern the interpretation of the Contract Documents prior to award of the contract.

1. Agreement
2. Addenda
3. Instructions to Bidders
4. Special Conditions
5. Supplementary Conditions
6. General Conditions
7. Technical Specifications/Drawings/Plans
8. Bid Documents

After award, Work Change Directives, Change Orders, amendments and revisions to plans and specifications will take precedence over any of the above. In case of discrepancy among technical specifications, drawings and plans, the most restrictive shall govern. Detailed plans shall have precedence over general plans. In the event that any conflicts cannot be resolved by reference to

this Governing Order of Contract Documents provision, then City shall resolve the conflict in any manner which is acceptable to City and which comports with the overall intent of the Contract Documents.

ARTICLE 9. MISCELLANEOUS.

9.1 *Terms.* Terms used in this Agreement will have the meanings indicated in the General Conditions.

9.2 *Assignment.* Unless expressly agreed to elsewhere in the Contract documents, no assignment by a party hereto of any rights under or interests in the Contract Documents will be binding on another party hereto without the written consent of the party sought to be bound; and specifically but without limitation moneys that may become due and moneys that are due may not be assigned without such consent (except to the extent that the effect of this restriction may be limited by law), and unless specifically stated to the contrary in any written consent to an assignment, no assignment will release or discharge the assignor from any duty or responsibility under the Contract Documents.

9.3 *Successors and assigns.* Owner and Contractor each binds itself, its partners, successors, assigns and legal representatives to the other party hereto, its partners, successors, assigns and legal representatives in respect of all covenants, agreements and obligations contained in the Contract Documents.

9.4 *Severability.* Any provision or part of the Contract Documents held to be void or unenforceable under any Law or Regulation shall be stricken, and all remaining provisions shall continue to be valid and binding upon Owner and Contractor, who agree that the Contract Documents shall be reformed to replaced such stricken provision or part thereof with a valid and enforceable provisions that comes as close as possible to expressing the intention of the stricken provision.

9.5 *Public entity crimes.* A person or affiliate who has been placed on the convicted vendor list following a conviction for a public entity crime may not submit a Bid on a Contract to provide any goods or services to a public entity, may not submit a Bid on a Contract with a public entity for the construction or repair of a public building or public work, may not be awarded or perform Work as a Contractor, Supplier, Subcontractor, or Consultant under a Contract with any public entity, and may not transact business with any public entity in excess of the threshold amount provided in Section 287.017, Florida Statutes, for Category Two for a period of 36 months from the date of being placed on the convicted vendor list.

9.6 *Inspector General.* In accordance with Palm Beach County ordinance number 2011-009, the Contract Documents may be subject to investigation and/or audit by the Palm Beach County Inspector General. Contractor should review such ordinance in order to be aware of its rights and/or obligations under such ordinance and as applicable.

9.7 *Waiver.* Failure of either party to enforce or exercise any right(s) under the Contract Documents shall not be deemed a waiver of either party's right to enforce said right(s) at any time thereafter.

9.8 *Waiver of jury trial.* TO ENCOURAGE PROMPT AND EQUITABLE RESOLUTION OF ANY LITIGATION, EACH PARTY HEREBY WAIVES ITS RIGHTS TO A TRIAL BY JURY IN ANY LITIGATION RELATED TO THE CONTRACT DOCUMENTS.

9.9 *Independent Contractor.* The Contractor is, and shall be, in the performance of all Work under the Contract Documents, an Independent Contractor, and not an employee, agent, or servant of the Owner. All persons engaged in any of the Work performed pursuant to the Contract Documents shall at all times and in all places be subject to the Contractor's sole direction, supervision and control.

9.10 *Access and audits.* The Contractor shall maintain adequate records to justify all charges, expenses, and costs incurred in estimating and performing the Work for at least five (5) years after final payment is made. The Owner shall have access to such books, records, and documents as required for the purpose of inspection or audit during normal business hours at the Contractor's place of business. Under no circumstances will Contractor be required to disclose any confidential or proprietary information regarding its products and service costs.

9.11 *Preparation.* The Contract Documents shall not be construed more strongly against either party regardless of who was more responsible for its preparation.

9.12 *Public Records Law.* Contractor shall comply with Florida's Public Records Laws, and specifically agrees to:

- a) Keep and maintain public records required by the Owner to perform the service.
- b) Upon request from the Owner's custodian of public records, provide the Owner with a copy of the requested records or allow the records to be inspected or copied within a reasonable time at a cost that does not exceed the cost provided in Chapter 119, Florida Statutes or as otherwise provided by law.
- c) Ensure that public records that are exempt or confidential and exempt from public records disclosure requirements are not disclosed except as authorized by law for the duration of the contract term and following completion of the contract if the Contractor does not transfer the records to the Owner.
- d) Upon completion of the contract, transfer, at no cost, to the Owner all public records in possession of the Contractor or keep and maintain public records required by the Owner to perform the service. If the Contractor transfers all public records to the Owner upon completion of the contract, the Contractor shall destroy any duplicate public records that are exempt or confidential and exempt from public records disclosure requirements. If the Contractor keeps and maintains public records upon completion of the Contract, the Contractor shall meet all applicable requirements for retaining public records. All records stored electronically must be provided to the Owner, upon request from the Owner's custodian of public records, in a format that is compatible with the information technology systems of the Owner.

IF THE CONTRACTOR HAS QUESTIONS REGARDING THE APPLICATION OF CHAPTER 119, FLORIDA STATUTES, TO THE CONTRACTOR'S DUTY TO PROVIDE PUBLIC RECORDS RELATING TO THIS AGREEMENT, CONTACT THE CUSTODIAN OF PUBLIC RECORDS OR DESIGNEE AT: ATTENTION DEBBIE ANDREA, (561) 586-1660 OR DANDREA@LAKEWORTH.ORG OR 7 NORTH DIXIE HIGHWAY, LAKE WORTH, FL 33460.

9.13 *Enforcement costs.* If any legal action or other proceeding is brought for the enforcement of the Contract Documents, or because of an alleged dispute, breach, default or misrepresentation in connection with any provisions of the Contract Documents, the parties agree that each party shall be responsible for its own attorney's fees.

9.14 *Binding authority.* Contractor's representative below has full power, authority and legal right to execute and deliver these Contract Documents and perform all of its obligations under the Contract Documents. By signing the Contract Documents, the representative hereby represents to the Owner that he/she has the authority and full legal power to execute the Contract Documents and any and all documents necessary to effectuate and implement the terms of the Contract Documents on behalf of the party for whom he or she is signing and to bind and obligate such party with respect to all provisions contained in the Contract Documents.

9.15 *Assignment of warranties.* Contractor shall assign to Owner all warranties extended to Contractor by material suppliers. If an assignment of warranty requires the material supplier to consent to same, then Contractor shall secure the material supplier's consent to assign said warranties to Owner.

9.16 *Contractor's certifications.* Contractor certifies that it has not engaged in corrupt, fraudulent, collusive, or coercive practices in competing for or in executing the Contract Documents. For the purposes of this paragraph:

1. "corrupt practice" means the offering, giving, receiving, or soliciting of anything of value likely to influence the action of a public official in the bidding process or in the Contract execution;
2. "fraudulent practice" means an intentional misrepresentation of facts made (a) to influence the bidding process or the execution of the Contract Documents to the detriment of Owner, (b) to establish Bid or Contract prices at artificial non-competitive levels, or (c) to deprive Owner of the benefits of free and open competition;
3. "collusive practice" means a scheme or arrangement between two or more Bidders, with or without the knowledge of Owner, a purpose of which is to establish Bid prices at artificial, non-competitive levels; and
4. "coercive practice" means harming or threatening to harm, directly or indirectly, persons or their property to influence their participation in the bidding process or affect the execution of the Contract Documents.

9.17 *Construction defects.* PURSUANT TO SECTION 558.005, FLORIDA STATUTES, ANY CLAIMS FOR CONSTRUCTION DEFECTS ARE NOT SUBJECT TO THE NOTICE AND CURE PROVISIONS OF CHAPTER 558, FLORIDA STATUTES.

9.18 *Delays; Contractor's remedies.* NOTWITHSTANDING ANY PROVISION ELSEWHERE IN THE CONTRACT DOCUMENTS, NO CLAIM FOR DAMAGES OR ANY CLAIM OTHER THAN FOR AN EXTENSION OF TIME SHALL BE MADE OR ASSERTED AGAINST OWNER BY REASON OF ANY DELAYS. Contractor shall not be entitled to an increase in the Contract Price or payment or compensation of any kind from Owner for direct, indirect, consequential, impact or other costs, expenses or damages, including, but not limited to, costs of acceleration or inefficiency, arising because of delay, disruption, interference, or hindrance, be it reasonable or unreasonable, foreseeable or avoidable or unavoidable. Contractor shall be entitled only to extensions of the Contract Time as the sole and exclusive remedy for such resulting delays, in accordance with and the extent specifically provided herein.

REMAINDER OF THIS PAGE INTENTIONALLY LEFT BLANK
SIGNATURE PAGE FOLLOWS

IN WITNESS WHEREOF, Owner and Contractor have signed this Agreement in four parts. Two counterparts have been delivered to Owner, and one counterpart each to Contractor and Engineer. All portions of the Contract Documents have been signed or identified by Owner and Contractor or by Engineer on their behalf.

CITY OF LAKE WORTH, FLORIDA

By: _____
Pam Triolo, Mayor

ATTEST

Pamela J. Lopez, City Clerk

Approved as to form and legal sufficiency:

Glen J. Torcivia, City Attorney

CONTRACTOR: _____

By: _____

Print Name: _____

Title: _____

[Corporate Seal]

STATE OF _____)
COUNTY OF _____)

The foregoing instrument was acknowledged before me this _____ day of _____, 2016 by _____, as _____ of _____, Inc., a Florida corporation, and who is personally known to me or who has produced the following _____ as identification.

Notary Public:

PROJECT: Surficial Aquifer Test Well TW-17
for City of Lake Worth
IFB #17-102
Project WT1614

00501
OPINION OF ATTORNEY

This is to certify that I have examined the attached Contract Documents, that after such examination I am of the opinion that the execution of the Agreement, the Performance Bond and Payment Bond are in due and proper form.

Attorney for Owner

This the _____ day of _____, 20_____.

00610
Construction Performance Bond

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

CONTRACTOR (Name and Address):

SURETY (Name and Principal Place of Business):

OWNER (Name and Address):

CONSTRUCTION CONTRACT

Date:

Amount:

Description (Name and Location):

BOND

Date (Not earlier than Construction Contract Date):

Amount:

Modifications to this Bond Form:

CONTRACTOR AS PRINCIPAL

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

SURETY

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

CONTRACTOR AS PRINCIPAL

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

SURETY

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

EJCDC No. 1910-28A (1984 Edition)

Prepared through the joint efforts of The Surety Association of America, Engineers' Joint Contract Documents Committee, The Associated General Contractors of America, and the American Institute of Architects.

1. The Contractor and the Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to the Owner for the performance of the Construction Contract, which is incorporated herein by reference.
2. If the Contractor performs the Construction Contract, the Surety and the Contractor shall have no obligation under this Bond, except to participate in conferences as provided in Subparagraph 3.1.
3. If there is no Owner Default, the Surety's obligation under this Bond shall arise after:
 - 3.1. The Owner has notified the Contractor and the Surety at its address described in Paragraph 10 below, that the Owner is considering declaring a Contractor Default and has requested and attempted to arrange a conference with the Contractor and the Surety to be held not later than fifteen days after receipt of such notice to discuss methods of performing the Construction Contract. If the Owner, the Contractor and the Surety agree, the Contractor shall be allowed a reasonable time to perform the Construction Contract, but such an agreement shall not waive the Owner's right, if any, subsequently to declare a Contractor Default; and
 - 3.2. The Owner has declared a Contractor Default and formally terminated the Contractor's right to complete the contract. Such Contractor Default shall not be declared earlier than twenty days after the Contractor and the Surety have received notice as provided in Subparagraph 3.1; and
 - 3.3. The Owner has agreed to pay the Balance of the Contract Price to the Surety in accordance with the terms of the Construction Contract or to a contractor selected to perform the Construction Contract in accordance with the terms of the contract with the Owner.
4. When the Owner has satisfied the conditions of Paragraph 3, the Surety shall promptly and at the Surety's expense take one of the following actions:
 - 4.1. Arrange for the Contractor, with consent of the Owner, to perform and complete the Construction Contract; or
 - 4.2. Undertake to perform and complete the Construction Contract itself, through its agents or through independent contractors; or
 - 4.3. Obtain bids or negotiated proposals from qualified contractors acceptable to the Owner for a contract for performance and completion of the Construction Contract, arrange for a contract to be prepared for execution by the Owner and the contractor selected with the Owner's concurrence, to be secured with performance and payment bonds executed by a qualified surety equivalent to the bonds issued on the Construction Contract, and pay to the Owner the amount of damages as described in Paragraph 6 in excess of the Balance of the Contract Price incurred by the Owner resulting from the Contractor's default; or
 - 4.4. Waive its right to perform and complete, arrange for completion, or obtain a new contractor and with reasonable promptness under the circumstances:
 1. After investigation, determine the amount for which it may be liable to the Owner and, as soon as practicable after the amount is determined, tender payment therefor to the Owner; or
 2. Deny liability in whole or in part and notify the Owner citing reasons therefor.
5. If the Surety does not proceed as provided in Paragraph 4 with reasonable promptness, the Surety shall be deemed to be in default on this Bond fifteen days after receipt of an additional written notice from the Owner to the Surety demanding that the Surety perform its obligations under this Bond, and the Owner shall be entitled to enforce any remedy available to the Owner. If the Surety proceeds as provided in Subparagraph 4.4, and the Owner refuses the payment tendered or the Surety has denied liability, in whole or in part, without further notice the Owner shall be entitled to enforce any remedy available to the Owner.
6. After the Owner has terminated the Contractor's right to complete the Construction Contract, and if the Surety elects to act under Subparagraph 4.1, 4.2, or 4.3 above, then the responsibilities of the Surety to the Owner shall not be greater than those of the Contractor under the Construction Contract, and the responsibilities of the Owner to the Surety shall not be greater than those of the Owner under the Construction Contract. To the limit of the amount of this Bond, but subject to commitment by the Owner of the Balance of the Contract Price to mitigation of costs and damages on the Construction Contract, the Surety is obligated without duplication for:
 - 6.1. The responsibilities of the Contractor for correction of defective work and completion of the Construction Contract;
 - 6.2. Additional legal including appellate proceedings, design professional and delay costs and expenses resulting from the Contractor's default, and *
 - 6.3. Liquidated damages, or if no liquidated damages are specified in the Construction Contract, actual damages caused by delayed performance or non-performance of the Contractor.
7. The Surety shall not be liable to the Owner or others for obligations of the Contractor that are unrelated to the Construction Contract, and the Balance of the Contract Price shall not be reduced or set off on account of any such unrelated obligations. No right of action shall accrue on this Bond to any person or entity other than the Owner or its heirs, executors, administrators, or successors.
8. The Surety hereby waives notice of any change, including changes of time, to the Construction Contract or to related subcontracts, purchase orders and other obligations.
9. Any proceeding, legal or equitable, under this Bond may be instituted in any court of competent jurisdiction in the location in which the work or part of the work is located and shall be instituted within two years after Contractor Default or within two years after the Contractor ceased working or within two years after the Surety refuses or fails to perform its obligations under this Bond, whichever occurs first. If the provisions of this Paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall be applicable.
10. Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address shown on the signature page.
11. When this Bond has been furnished to comply with a statutory or other legal requirement in the location where the construction was to be performed, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. The intent is that this Bond shall be construed as a statutory bond and not as a common law bond.
12. Definitions.
 - 12.1. Balance of the Contract Price: The total amount payable by the Owner to the Contractor under the Construction Contract after all proper adjustments have been made, including allowance to the Contractor of any amounts received or to be received by the Owner in settlement of insurance or other claims for damages to which the Contractor is entitled, reduced by all valid and proper payments made to or on behalf of the Contractor under the Construction Contract.
 - 12.2. Construction Contract: The agreement between the Owner and the Contractor identified on the signature page, including all Contract Documents and changes thereto.
 - 12.3. Contractor Default: Failure of the Contractor, which has neither been remedied nor waived, to perform or otherwise to comply with the terms of the Construction Contract.
 - 12.4. Owner Default: Failure of the Owner, which has neither been remedied nor waived, to pay the Contractor as required by the Construction Contract or to perform and complete or comply with the other terms thereof.

* resulting from the actions or failure to act of the Surety under Paragraph 4; and

This Bond is executed pursuant to Florida Statutes Section 255.05 or Section 713.23, whichever is applicable, and is subject to the notice and time limitation provisions.

(FOR INFORMATION ONLY—Name, Address and Telephone)

AGENT or BROKER:

OWNER'S REPRESENTATIVE (Architect, Engineer or other party):

Mock, Roos & Associates, Inc.
5720 Corporate Way
West Palm Beach, FL 33407

CONSTRUCTION PERFORMANCE BOND

00610-2

00620
Construction Payment Bond

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

CONTRACTOR (Name and Address):

SURETY (Name and Principal Place of Business):

OWNER (Name and Address):

CONSTRUCTION CONTRACT

Date:

Amount:

Description (Name and Location):

BOND

Date (Not earlier than Construction Contract Date):

Amount:

Modifications to this Bond Form:

CONTRACTOR AS PRINCIPAL

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

SURETY

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

CONTRACTOR AS PRINCIPAL

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

SURETY

Company: _____ (Corp. Seal)

Signature: _____
Name and Title:

ICDC No. 1910-28B (1984 Edition)
Prepared through the joint efforts of the Surety Association of America, Engineers' Joint Contract Documents Committee, The Associated General Contractors of America, American Institute of Architects, American Subcontractors Association, and the Associated Specialty Contractors.

1. The Contractor and the Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to the Owner to pay for labor, materials and equipment furnished for use in the performance of the Construction Contract, which is incorporated herein by reference.

2. With respect to the Owner, this obligation shall be null and void if the Contractor:

- 2.1. Promptly makes payment, directly or indirectly, for all sums due Claimants, and
- 2.2. Defends, indemnifies and holds harmless the Owner from all claims, demands, liens or suits by any person or entity who furnished labor, materials or equipment for use in the performance of the Construction Contract, provided the Owner has promptly notified the Contractor and the Surety (at the address described in Paragraph 12) of any claims, demands, liens or suits and tendered defense of such claims, demands, liens or suits to the Contractor and the Surety, and provided there is no Owner Default.

3. With respect to Claimants, this obligation shall be null and void if the Contractor promptly makes payment, directly or indirectly, for all sums due.

4. The Surety shall have no obligation to Claimants under this Bond until:

- 4.1. Claimants who are employed by or have a direct contract with the Contractor have given notice to the Surety (at the address described in Paragraph 12) and sent a copy, or notice thereof, to the Owner, stating that a claim is being made under this Bond and, with substantial accuracy, the amount of the claim. ^(see Note 1)
- 4.2. Claimants who do not have a direct contract with the Contractor:
 - 1. Have furnished written notice to the Contractor and sent a copy, or notice thereof, to the Owner, within 90 days after having last performed labor or last furnished materials or equipment included in the claim stating, with substantial accuracy, the amount of the claim and the name of the party to whom the materials were furnished or supplied or for whom the labor was done or performed; and
 - 2. Have either received a rejection in whole or in part from the Contractor, or not received within 30 days of furnishing the above notice any communication from the Contractor by which the Contractor has indicated the claim will be paid directly or indirectly; and
 - 3. Not having been paid within the above 30 days, have sent a written notice to the Surety (at the address described in Paragraph 12) and sent a copy, or notice thereof, to the Owner, stating that a claim is being made under this Bond and enclosing a copy of the previous written notice furnished to the Contractor.

5. If a notice required by Paragraph 4 is given by the Owner to the Contractor or to the Surety, that is sufficient compliance.

6. When the Claimant has satisfied the conditions of Paragraph 4, the Surety shall promptly and at the Surety's expense take the following actions:

- 6.1. Send an answer to the Claimant, with a copy to the Owner, within 45 days after receipt of the claim, stating the amounts that are undisputed and the basis for challenging any amounts that are disputed.
- 6.2. Pay or arrange for payment of any undisputed amounts.

7. The Surety's total obligation shall not exceed the amount of this Bond, and the amount of this Bond shall be credited for any payments made in good faith by the Surety.

8. Amounts owed by the Owner to the Contractor under the Construction Contract shall be used for the performance of the Construction Contract

Note 1: As an additional requirement any claimant, except a laborer, who is not in privity with the Contractor and who has not received payment for his or her work shall, within forty-five days after beginning to furnish labor, materials or supplies, furnish the Contractor with a Notice that he intends to look to the Bond for protection.

This Bond is executed pursuant to Florida Statutes Section 255.05 or Section 713.23, whichever is applicable, and is subject to the notice and time limitation provisions.

(FOR INFORMATION ONLY—Name, Address and Telephone)

AGENT or BROKER:

OWNER'S REPRESENTATIVE (Architect, Engineer or other party):

Mock, Roos & Associates, Inc.
5720 Corporate Way
West Palm Beach, FL 33407

and to satisfy claims, if any, under any Construction Performance Bond. By the Contractor furnishing and the Owner accepting this Bond, they agree that all funds earned by the Contractor in the performance of the Construction Contract are dedicated to satisfy obligations of the Contractor and the Surety under this Bond, subject to the Owner's priority to use the funds for the completion of the work.

9. The Surety shall not be liable to the Owner. Claimants or others for obligations of the Contractor that are unrelated to the Construction Contract. The Owner shall not be liable for payment of any costs or expenses of any Claimant under this Bond, and shall have under this Bond no obligations to make payments to, give notices on behalf of, or otherwise have obligations to Claimants under this Bond.

10. The Surety hereby waives notice of any change, including changes of time, to the Construction Contract or to related subcontracts, purchase orders and other obligations.

11. No suit or action shall be commenced by a Claimant under this Bond other than in a court of competent jurisdiction in the location in which the work or part of the work is located or after the expiration of 2 years from the date (1) on which the Claimant gave the notice required by Subparagraph 4.1 or Clause 4.2 (iii), or (2) on which the last labor or service was performed by anyone or the last materials or equipment were furnished by anyone under the Construction Contract, whichever of (1) or (2) first occurs. If the provisions of this Paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall be applicable.

12. Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address shown on the signature page. Actual receipt of notice by Surety, the Owner or the Contractor, however accomplished, shall be sufficient compliance as of the date received at the address shown on the signature page.

13. When this Bond has been furnished to comply with a statutory or other legal requirement in the location where the construction was to be performed, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. The intent is, that this Bond shall be construed as a statutory bond and not as a common law bond.

14. Upon request by any person or entity appearing to be a potential beneficiary of this Bond, the Contractor shall promptly furnish a copy of this Bond or shall permit a copy to be made.

15. DEFINITIONS

15.1. Claimant: An individual or entity having a direct contract with the Contractor or with a subcontractor of the Contractor to furnish labor, materials or equipment for use in the performance of the Contract. The intent of this Bond shall be to include without limitation in the terms "labor, materials or equipment" that part of water, gas, power, light, heat, oil, gasoline, telephone service or rental equipment used in the Construction Contract, architectural and engineering services required for performance of the work of the Contractor and the Contractor's subcontractors, and all other items for which a mechanic's lien may be asserted in the jurisdiction where the labor, materials or equipment were furnished.

15.2. Construction Contract: The agreement between the Owner and the Contractor identified on the signature page, including all Contract Documents and changes thereto.

15.3. Owner Default: Failure of the Owner, which has neither been remedied nor waived, to pay the Contractor as required by the Construction Contract or to perform and complete or comply with the other terms thereof.

PROJECT: Surficial Aquifer Test Well TW-17
for City of Lake Worth
IFB #17-102
Project WT1614

SECTION 00630
NOTICE OF COMPLIANCE WITH CHAPTER 556, FLORIDA STATUTES

The undersigned Contractor does hereby confirm to the Owner and Engineer that the Contractor has reviewed the provisions of Chapter 556, Florida Statutes, and has provided to “Sunshine State One-Call of Florida, Inc.” the information required under F.S. 556.105 before the commencement of any excavation or demolition required for the Work.

Executed this _____ day of _____, 20____.

(name of Contractor)

(signature)

(print name)

(title)

END OF SECTION

00670
CONTRACTOR'S AFFIDAVIT TO OWNER

STATE OF FLORIDA
COUNTY OF _____

Before me, the undersigned authority, authorized to administer oaths and take acknowledgements, personally appeared _____, who, being by me first duly sworn, on oath depose(s) and say(s):

(1) He/she is/They are a (Corporation, Partnership or Individual) of _____ (State), doing business as _____ (Company Name), hereinafter called "Contractor".

(2) Contractor heretofore entered into a Contract with _____ hereinafter called "Owner" to do Work (furnish material, labor and services) for the construction of _____, located at _____ County, Florida. "

(3) Contractor has fully completed construction in accordance with the terms of the Contract, and all lienors have been paid in full, except:

<u>NAME OF LIENOR</u>	<u>AMOUNT DUE AND UNPAID</u>
	\$

(4) All Workmen's Compensation claims have been settled and no liability claims are pending, in connection with, arising out of or resulting from the Contract.

(5) Receipt by the Contractor of the final payment, under the aforementioned Contract, shall constitute a full release and discharge by the Contractor to the Owner of any and all claims of the Contractor against the Owner, arising out of, connected with, or resulting from performance of the obligations of the Contractor pursuant to the Contract Documents.

(6) The term "lienor" as used in this affidavit means any person having a lien or a prospective lien, under the Mechanics Lien Law of Florida, on the land and property of the Owner referred to in paragraph (2) of this affidavit..

(7) This affidavit is given pursuant to the provisions of Florida Statutes Section 713.06 or Section 255.05, whichever is applicable.
Signed and sealed in the presence of:

(ENTITY)

(SEAL)

By: _____

Subscribed and Sworn to (or affirmed) before me on _____ (date) by _____ (name). He/she is personally known to me or has presented _____ (type of identification) as identification.

Notary Public Signature and Seal

Print Notary Name and Commission No.

00680
APPLICATION FOR PAYMENT NO. _____

Project Surficial Aquifer Test Well TW-17 for City of Lake Worth

Application is made for payment, as hereinafter shown, in connection with this Agreement:

Total Work to Date - see attached schedule	\$ _____
Total Material Suitably Stored - see attached schedule	\$ _____
Gross Amount Due	\$ _____
Less _____ % Retainage	\$ _____
Amount Due to Date	\$ _____
Less Previous Applications	\$ _____
Amount Due This Application	\$ _____

Original Contract Price	\$ _____
Net Change Orders	\$ _____
Current Contract Price	\$ _____
Value of Work Remaining to be Done	\$ _____

Contractor's Certification:

The undersigned Contractor certifies that (1) all previous progress payments received from Owner on account of Work done under the Agreement referred to above have been applied to discharge in full all obligations of Contractor incurred in connection with Work covered by prior Applications for Payment numbered 1 through _____, inclusive; and (2) title to all materials and equipment incorporated in said Work or otherwise listed in or covered by this Application for Payment will pass to Owner at time of payment free and clear of all liens, claims, security interests and encumbrances (except such as covered by Bond acceptable to Owner).

Dated _____, 20__

Contractor and Mailing Address

By _____
(Name and Title)

State of _____)
County of _____)ss

Subscribed and Sworn to (or affirmed) before me on _____ (date)
personally appeared _____ (name).
He/she is personally known to me or has presented _____
_____ (type of identification) as identification. Who being so duly sworn, did depose and say that he/she is _____ of the Contractor above mentioned; that he/she executed the above Application for Payment and statement on behalf of said Contractor; and that all of the statements contained therein are true, correct and complete.

Notary Public Signature and Seal

Print Notary Name and Commission No.

Payment of the above AMOUNT DUE THIS APPLICATION is recommended.

MOCK, ROOS & ASSOCIATES, INC.

Date: _____

By: _____
(Name) (Title)

Date: _____

CITY OF LAKE WORTH
By: _____
(Name) (Title)

00681
SCHEDULE OF VALUES AND WORK COMPLETED

PROJECT TITLE _____

CONTRACTOR _____

FOR PERIOD ENDING _____

TO ACCOMPANY APPLICATION NO. _____

ITEM	CONTRACTOR'S Schedule of Values			Work Completed	
	Unit Price	Quantity	Amount	Quantity	Amount
	\$		\$		\$
NOTE: CONTRACTOR SHALL PREPARE APPROPRIATE SCHEDULE WITH ALL CONTRACT ITEMS					
SHOWN FOR ATTACHMENT TO EACH APPLICATION FOR PAYMENT.					
			Total (Original Contract)		\$ _____
C.O. No. 1					
C.O. No. 1	NOTE: CHANGE ORDER(S) SHALL BE ITEMIZED AS APPLICABLE.				

TOTAL WORK TO DATE \$ _____

MATERIALS SUITABLY STORED

NOTE: CONTRACTOR TO ITEMIZE AND ATTACH APPROPRIATE INVOICES

TOTAL MATERIAL SUITABLY STORED \$ _____

Accompanying Documentation (Contractor to itemize):

This document has important legal consequences; consultation with an attorney is encouraged with respect to its use or modification. This document should be adapted to the particular circumstances of the contemplated Project and the controlling Laws and Regulations.

STANDARD GENERAL CONDITIONS OF THE CONSTRUCTION CONTRACT

Prepared by



Issued and Published Jointly by



These General Conditions have been prepared for use with the Agreement Between Owner and Contractor for Construction Contract (EJCDC® C-520, Stipulated Sum, or C-525, Cost-Plus, 2013 Editions). Their provisions are interrelated and a change in one may necessitate a change in the other.

To prepare supplementary conditions that are coordinated with the General Conditions, use EJCDC's Guide to the Preparation of Supplementary Conditions (EJCDC® C-800, 2013 Edition). The full EJCDC Construction series of documents is discussed in the Commentary on the 2013 EJCDC Construction Documents (EJCDC® C-001, 2013 Edition).

Copyright © 2013:

National Society of Professional Engineers

1420 King Street, Alexandria, VA 22314-2794

(703) 684-2882

www.nspe.org

American Council of Engineering Companies

1015 15th Street N.W., Washington, DC 20005

(202) 347-7474

www.acec.org

American Society of Civil Engineers

1801 Alexander Bell Drive, Reston, VA 20191-4400

(800) 548-2723

www.asce.org

The copyright for this document is owned jointly by the three sponsoring organizations listed above. The National Society of Professional Engineers is the Copyright Administrator for the EJCDC documents; please direct all inquiries regarding EJCDC copyrights to NSPE.

NOTE: EJCDC publications may be purchased at www.ejcdc.org, or from any of the sponsoring organizations above.

STANDARD GENERAL CONDITIONS OF THE CONSTRUCTION CONTRACT

TABLE OF CONTENTS

	Page
Article 1 – Definitions and Terminology	1
1.01 Defined Terms	1
1.02 Terminology	5
Article 2 – Preliminary Matters	6
2.01 Delivery of Bonds and Evidence of Insurance	6
2.02 Copies of Documents	6
2.03 Before Starting Construction.....	6
2.04 Preconstruction Conference; Designation of Authorized Representatives	7
2.05 Initial Acceptance of Schedules.....	7
2.06 Electronic Transmittals.....	7
Article 3 – Documents: Intent, Requirements, Reuse	8
3.01 Intent	8
3.02 Reference Standards	8
3.03 Reporting and Resolving Discrepancies	8
3.04 Requirements of the Contract Documents	9
3.05 Reuse of Documents	10
Article 4 – Commencement and Progress of the Work.....	10
4.01 Commencement of Contract Times; Notice to Proceed	10
4.02 Starting the Work	10
4.03 Reference Points	10
4.04 Progress Schedule	10
4.05 Delays in Contractor’s Progress.....	11
Article 5 – Availability of Lands; Subsurface and Physical Conditions; Hazardous Environmental Conditions.....	12
5.01 Availability of Lands.....	12
5.02 Use of Site and Other Areas	12
5.03 Subsurface and Physical Conditions	13
5.04 Differing Subsurface or Physical Conditions	14
5.05 Underground Facilities	15

5.06	Hazardous Environmental Conditions at Site.....	17
Article 6 – Bonds and Insurance		19
6.01	Performance, Payment, and Other Bonds	19
6.02	Insurance—General Provisions	19
6.03	Contractor’s Insurance	20
6.04	Owner’s Liability Insurance	23
6.05	Property Insurance.....	23
6.06	Waiver of Rights	25
6.07	Receipt and Application of Property Insurance Proceeds.....	25
Article 7 – Contractor’s Responsibilities.....		26
7.01	Supervision and Superintendence	26
7.02	Labor; Working Hours	26
7.03	Services, Materials, and Equipment.....	26
7.04	“Or Equals”	27
7.05	Substitutes.....	28
7.06	Concerning Subcontractors, Suppliers, and Others	29
7.07	Patent Fees and Royalties	31
7.08	Permits	31
7.09	Taxes.....	32
7.10	Laws and Regulations	32
7.11	Record Documents.....	32
7.12	Safety and Protection.....	32
7.13	Safety Representative	33
7.14	Hazard Communication Programs	33
7.15	Emergencies	34
7.16	Shop Drawings, Samples, and Other Submittals.....	34
7.17	Contractor’s General Warranty and Guarantee.....	36
7.18	Indemnification	37
7.19	Delegation of Professional Design Services	37
Article 8 – Other Work at the Site		38
8.01	Other Work.....	38
8.02	Coordination.....	39
8.03	Legal Relationships.....	39

Article 9 – Owner’s Responsibilities	40
9.01 Communications to Contractor	40
9.02 Replacement of Engineer	40
9.03 Furnish Data	40
9.04 Pay When Due	40
9.05 Lands and Easements; Reports, Tests, and Drawings	40
9.06 Insurance	40
9.07 Change Orders.....	40
9.08 Inspections, Tests, and Approvals	41
9.09 Limitations on Owner’s Responsibilities	41
9.10 Undisclosed Hazardous Environmental Condition	41
9.11 Evidence of Financial Arrangements	41
9.12 Safety Programs	41
Article 10 – Engineer’s Status During Construction	41
10.01 Owner’s Representative	41
10.02 Visits to Site	41
10.03 Project Representative	42
10.04 Rejecting Defective Work.....	42
10.05 Shop Drawings, Change Orders and Payments	42
10.06 Determinations for Unit Price Work	42
10.07 Decisions on Requirements of Contract Documents and Acceptability of Work	42
10.08 Limitations on Engineer’s Authority and Responsibilities.....	42
10.09 Compliance with Safety Program	43
Article 11 – Amending the Contract Documents; Changes in the Work.....	43
11.01 Amending and Supplementing Contract Documents.....	43
11.02 Owner-Authorized Changes in the Work	44
11.03 Unauthorized Changes in the Work	44
11.04 Change of Contract Price.....	44
11.05 Change of Contract Times	45
11.06 Change Proposals	45
11.07 Execution of Change Orders.....	46
11.08 Notification to Surety	47
Article 12 – Claims	47

12.01	Claims	47
Article 13	– Cost of the Work; Allowances; Unit Price Work	48
13.01	Cost of the Work	48
13.02	Allowances	50
13.03	Unit Price Work	51
Article 14	– Tests and Inspections; Correction, Removal or Acceptance of Defective Work	52
14.01	Access to Work.....	52
14.02	Tests, Inspections, and Approvals.....	52
14.03	Defective Work.....	53
14.04	Acceptance of Defective Work.....	53
14.05	Uncovering Work.....	53
14.06	Owner May Stop the Work	54
14.07	Owner May Correct Defective Work.....	54
Article 15	– Payments to Contractor; Set-Offs; Completion; Correction Period.....	55
15.01	Progress Payments	55
15.02	Contractor’s Warranty of Title	58
15.03	Substantial Completion	58
15.04	Partial Use or Occupancy	59
15.05	Final Inspection	59
15.06	Final Payment.....	59
15.07	Waiver of Claims.....	61
15.08	Correction Period	61
Article 16	– Suspension of Work and Termination.....	62
16.01	Owner May Suspend Work	62
16.02	Owner May Terminate for Cause	62
16.03	Owner May Terminate For Convenience	63
16.04	Contractor May Stop Work or Terminate	63
Article 17	– Final Resolution of Disputes.....	64
17.01	Methods and Procedures.....	64
Article 18	– Miscellaneous.....	64
18.01	Giving Notice	64
18.02	Computation of Times.....	64
18.03	Cumulative Remedies.....	64

18.04 Limitation of Damages65
18.05 No Waiver.....65
18.06 Survival of Obligations.....65
18.07 Controlling Law.....65
18.08 Headings.....65

ARTICLE 1 – DEFINITIONS AND TERMINOLOGY

1.01 *Defined Terms*

- A. Wherever used in the Bidding Requirements or Contract Documents, a term printed with initial capital letters, including the term's singular and plural forms, will have the meaning indicated in the definitions below. In addition to terms specifically defined, terms with initial capital letters in the Contract Documents include references to identified articles and paragraphs, and the titles of other documents or forms.
1. *Addenda*—Written or graphic instruments issued prior to the opening of Bids which clarify, correct, or change the Bidding Requirements or the proposed Contract Documents.
 2. *Agreement*—The written instrument, executed by Owner and Contractor, that sets forth the Contract Price and Contract Times, identifies the parties and the Engineer, and designates the specific items that are Contract Documents.
 3. *Application for Payment*—The form acceptable to Engineer which is to be used by Contractor during the course of the Work in requesting progress or final payments and which is to be accompanied by such supporting documentation as is required by the Contract Documents.
 4. *Bid*—The offer of a Bidder submitted on the prescribed form setting forth the prices for the Work to be performed.
 5. *Bidder*—An individual or entity that submits a Bid to Owner.
 6. *Bidding Documents*—The Bidding Requirements, the proposed Contract Documents, and all Addenda.
 7. *Bidding Requirements*—The advertisement or invitation to bid, Instructions to Bidders, Bid Bond or other Bid security, if any, the Bid Form, and the Bid with any attachments.
 8. *Change Order*—A document which is signed by Contractor and Owner and authorizes an addition, deletion, or revision in the Work or an adjustment in the Contract Price or the Contract Times, or other revision to the Contract, issued on or after the Effective Date of the Contract.
 9. *Change Proposal*—A written request by Contractor, duly submitted in compliance with the procedural requirements set forth herein, seeking an adjustment in Contract Price or Contract Times, or both; contesting an initial decision by Engineer concerning the requirements of the Contract Documents or the acceptability of Work under the Contract Documents; challenging a set-off against payments due; or seeking other relief with respect to the terms of the Contract.
 10. *Claim*—(a) A demand or assertion by Owner directly to Contractor, duly submitted in compliance with the procedural requirements set forth herein: seeking an adjustment of Contract Price or Contract Times, or both; contesting an initial decision by Engineer concerning the requirements of the Contract Documents or the acceptability of Work under the Contract Documents; contesting Engineer's decision regarding a Change Proposal; seeking resolution of a contractual issue that Engineer has declined to address; or seeking other relief with respect to the terms of the Contract; or (b) a demand or assertion by Contractor directly to Owner, duly submitted in compliance with the procedural requirements set forth herein, contesting Engineer's decision regarding a Change Proposal; or seeking resolution of a contractual issue that Engineer

has declined to address. A demand for money or services by a third party is not a Claim.

11. *Constituent of Concern*—Asbestos, petroleum, radioactive materials, polychlorinated biphenyls (PCBs), hazardous waste, and any substance, product, waste, or other material of any nature whatsoever that is or becomes listed, regulated, or addressed pursuant to (a) the Comprehensive Environmental Response, Compensation and Liability Act, 42 U.S.C. §§9601 et seq. (“CERCLA”); (b) the Hazardous Materials Transportation Act, 49 U.S.C. §§5501 et seq.; (c) the Resource Conservation and Recovery Act, 42 U.S.C. §§6901 et seq. (“RCRA”); (d) the Toxic Substances Control Act, 15 U.S.C. §§2601 et seq.; (e) the Clean Water Act, 33 U.S.C. §§1251 et seq.; (f) the Clean Air Act, 42 U.S.C. §§7401 et seq.; or (g) any other federal, state, or local statute, law, rule, regulation, ordinance, resolution, code, order, or decree regulating, relating to, or imposing liability or standards of conduct concerning, any hazardous, toxic, or dangerous waste, substance, or material.
12. *Contract*—The entire and integrated written contract between the Owner and Contractor concerning the Work.
13. *Contract Documents*—Those items so designated in the Agreement, and which together comprise the Contract.
14. *Contract Price*—The money that Owner has agreed to pay Contractor for completion of the Work in accordance with the Contract Documents. .
15. *Contract Times*—The number of days or the dates by which Contractor shall: (a) achieve Milestones, if any; (b) achieve Substantial Completion; and (c) complete the Work.
16. *Contractor*—The individual or entity with which Owner has contracted for performance of the Work.
17. *Cost of the Work*—See Paragraph 13.01 for definition.
18. *Drawings*—The part of the Contract that graphically shows the scope, extent, and character of the Work to be performed by Contractor.
19. *Effective Date of the Contract*—The date, indicated in the Agreement, on which the Contract becomes effective.
20. *Engineer*—The individual or entity named as such in the Agreement.
21. *Field Order*—A written order issued by Engineer which requires minor changes in the Work but does not change the Contract Price or the Contract Times.
22. *Hazardous Environmental Condition*—The presence at the Site of Constituents of Concern in such quantities or circumstances that may present a danger to persons or property exposed thereto. The presence at the Site of materials that are necessary for the execution of the Work, or that are to be incorporated in the Work, and that are controlled and contained pursuant to industry practices, Laws and Regulations, and the requirements of the Contract, does not establish a Hazardous Environmental Condition.
23. *Laws and Regulations; Laws or Regulations*—Any and all applicable laws, statutes, rules, regulations, ordinances, codes, and orders of any and all governmental bodies, agencies, authorities, and courts having jurisdiction.

24. *Liens*—Charges, security interests, or encumbrances upon Contract-related funds, real property, or personal property.
25. *Milestone*—A principal event in the performance of the Work that the Contract requires Contractor to achieve by an intermediate completion date or by a time prior to Substantial Completion of all the Work.
26. *Notice of Award*—The written notice by Owner to a Bidder of Owner’s acceptance of the Bid.
27. *Notice to Proceed*—A written notice by Owner to Contractor fixing the date on which the Contract Times will commence to run and on which Contractor shall start to perform the Work.
28. *Owner*—The individual or entity with which Contractor has contracted regarding the Work, and which has agreed to pay Contractor for the performance of the Work, pursuant to the terms of the Contract.
29. *Progress Schedule*—A schedule, prepared and maintained by Contractor, describing the sequence and duration of the activities comprising the Contractor’s plan to accomplish the Work within the Contract Times.
30. *Project*—The total undertaking to be accomplished for Owner by engineers, contractors, and others, including planning, study, design, construction, testing, commissioning, and start-up, and of which the Work to be performed under the Contract Documents is a part.
31. *Project Manual*—The written documents prepared for, or made available for, procuring and constructing the Work, including but not limited to the Bidding Documents or other construction procurement documents, geotechnical and existing conditions information, the Agreement, bond forms, General Conditions, Supplementary Conditions, and Specifications. The contents of the Project Manual may be bound in one or more volumes.
32. *Resident Project Representative*—The authorized representative of Engineer assigned to assist Engineer at the Site. As used herein, the term Resident Project Representative or “RPR” includes any assistants or field staff of Resident Project Representative.
33. *Samples*—Physical examples of materials, equipment, or workmanship that are representative of some portion of the Work and that establish the standards by which such portion of the Work will be judged.
34. *Schedule of Submittals*—A schedule, prepared and maintained by Contractor, of required submittals and the time requirements for Engineer’s review of the submittals and the performance of related construction activities.
35. *Schedule of Values*—A schedule, prepared and maintained by Contractor, allocating portions of the Contract Price to various portions of the Work and used as the basis for reviewing Contractor’s Applications for Payment.
36. *Shop Drawings*—All drawings, diagrams, illustrations, schedules, and other data or information that are specifically prepared or assembled by or for Contractor and submitted by Contractor to illustrate some portion of the Work. Shop Drawings, whether approved or not, are not Drawings and are not Contract Documents.

37. *Site*—Lands or areas indicated in the Contract Documents as being furnished by Owner upon which the Work is to be performed, including rights-of-way and easements, and such other lands furnished by Owner which are designated for the use of Contractor.
38. *Specifications*—The part of the Contract that consists of written requirements for materials, equipment, systems, standards, and workmanship as applied to the Work, and certain administrative requirements and procedural matters applicable to the Work.
39. *Subcontractor*—An individual or entity having a direct contract with Contractor or with any other Subcontractor for the performance of a part of the Work.
40. *Substantial Completion*—The time at which the Work (or a specified part thereof) has progressed to the point where, in the opinion of Engineer, the Work (or a specified part thereof) is sufficiently complete, in accordance with the Contract Documents, so that the Work (or a specified part thereof) can be utilized for the purposes for which it is intended. The terms “substantially complete” and “substantially completed” as applied to all or part of the Work refer to Substantial Completion thereof.
41. *Successful Bidder*—The Bidder whose Bid the Owner accepts, and to which the Owner makes an award of contract, subject to stated conditions.
42. *Supplementary Conditions*—The part of the Contract that amends or supplements these General Conditions.
43. *Supplier*—A manufacturer, fabricator, supplier, distributor, materialman, or vendor having a direct contract with Contractor or with any Subcontractor to furnish materials or equipment to be incorporated in the Work by Contractor or a Subcontractor.
44. *Technical Data*—Those items expressly identified as Technical Data in the Supplementary Conditions, with respect to either (a) subsurface conditions at the Site, or physical conditions relating to existing surface or subsurface structures at the Site (except Underground Facilities) or (b) Hazardous Environmental Conditions at the Site. If no such express identifications of Technical Data have been made with respect to conditions at the Site, then the data contained in boring logs, recorded measurements of subsurface water levels, laboratory test results, and other factual, objective information regarding conditions at the Site that are set forth in any geotechnical or environmental report prepared for the Project and made available to Contractor are hereby defined as Technical Data with respect to conditions at the Site under Paragraphs 5.03, 5.04, and 5.06.
45. *Underground Facilities*—All underground pipelines, conduits, ducts, cables, wires, manholes, vaults, tanks, tunnels, or other such facilities or attachments, and any encasements containing such facilities, including but not limited to those that convey electricity, gases, steam, liquid petroleum products, telephone or other communications, fiber optic transmissions, cable television, water, wastewater, storm water, other liquids or chemicals, or traffic or other control systems.
46. *Unit Price Work*—Work to be paid for on the basis of unit prices.
47. *Work*—The entire construction or the various separately identifiable parts thereof required to be provided under the Contract Documents. Work includes and is the result of performing or providing all labor, services, and documentation necessary to produce such construction; furnishing, installing, and incorporating all materials and equipment into such construction; and may include related services such as testing, start-up, and commissioning, all as required by the Contract Documents.

48. *Work Change Directive*—A written directive to Contractor issued on or after the Effective Date of the Contract, signed by Owner and recommended by Engineer, ordering an addition, deletion, or revision in the Work.

1.02 *Terminology*

- A. The words and terms discussed in the following paragraphs are not defined but, when used in the Bidding Requirements or Contract Documents, have the indicated meaning.
- B. *Intent of Certain Terms or Adjectives:*
1. The Contract Documents include the terms “as allowed,” “as approved,” “as ordered,” “as directed” or terms of like effect or import to authorize an exercise of professional judgment by Engineer. In addition, the adjectives “reasonable,” “suitable,” “acceptable,” “proper,” “satisfactory,” or adjectives of like effect or import are used to describe an action or determination of Engineer as to the Work. It is intended that such exercise of professional judgment, action, or determination will be solely to evaluate, in general, the Work for compliance with the information in the Contract Documents and with the design concept of the Project as a functioning whole as shown or indicated in the Contract Documents (unless there is a specific statement indicating otherwise). The use of any such term or adjective is not intended to and shall not be effective to assign to Engineer any duty or authority to supervise or direct the performance of the Work, or any duty or authority to undertake responsibility contrary to the provisions of Article 10 or any other provision of the Contract Documents.
- C. *Day:*
1. The word “day” means a calendar day of 24 hours measured from midnight to the next midnight.
- D. *Defective:*
1. The word “defective,” when modifying the word “Work,” refers to Work that is unsatisfactory, faulty, or deficient in that it:
 - a. does not conform to the Contract Documents; or
 - b. does not meet the requirements of any applicable inspection, reference standard, test, or approval referred to in the Contract Documents; or
 - c. has been damaged prior to Engineer’s recommendation of final payment (unless responsibility for the protection thereof has been assumed by Owner at Substantial Completion in accordance with Paragraph 15.03 or 15.04).
- E. *Furnish, Install, Perform, Provide:*
1. The word “furnish,” when used in connection with services, materials, or equipment, shall mean to supply and deliver said services, materials, or equipment to the Site (or some other specified location) ready for use or installation and in usable or operable condition.
 2. The word “install,” when used in connection with services, materials, or equipment, shall mean to put into use or place in final position said services, materials, or equipment complete and ready for intended use.

3. The words “perform” or “provide,” when used in connection with services, materials, or equipment, shall mean to furnish and install said services, materials, or equipment complete and ready for intended use.
 4. If the Contract Documents establish an obligation of Contractor with respect to specific services, materials, or equipment, but do not expressly use any of the four words “furnish,” “install,” “perform,” or “provide,” then Contractor shall furnish and install said services, materials, or equipment complete and ready for intended use.
- F. Unless stated otherwise in the Contract Documents, words or phrases that have a well-known technical or construction industry or trade meaning are used in the Contract Documents in accordance with such recognized meaning.

ARTICLE 2 – PRELIMINARY MATTERS

2.01 *Delivery of Bonds and Evidence of Insurance*

- A. *Bonds*: When Contractor delivers the executed counterparts of the Agreement to Owner, Contractor shall also deliver to Owner such bonds as Contractor may be required to furnish.
- B. *Evidence of Contractor’s Insurance*: When Contractor delivers the executed counterparts of the Agreement to Owner, Contractor shall also deliver to Owner, with copies to each named insured and additional insured (as identified in the Supplementary Conditions or elsewhere in the Contract), the certificates and other evidence of insurance required to be provided by Contractor in accordance with Article 6.
- C. *Evidence of Owner’s Insurance*: After receipt of the executed counterparts of the Agreement and all required bonds and insurance documentation, Owner shall promptly deliver to Contractor, with copies to each named insured and additional insured (as identified in the Supplementary Conditions or otherwise), the certificates and other evidence of insurance required to be provided by Owner under Article 6.

2.02 *Copies of Documents*

- A. Owner shall furnish to Contractor four printed copies of the Contract (including one fully executed counterpart of the Agreement), and one copy in electronic portable document format (PDF). Additional printed copies will be furnished upon request at the cost of reproduction.
- B. Owner shall maintain and safeguard at least one original printed record version of the Contract, including Drawings and Specifications signed and sealed by Engineer and other design professionals. Owner shall make such original printed record version of the Contract available to Contractor for review. Owner may delegate the responsibilities under this provision to Engineer.

2.03 *Before Starting Construction*

- A. *Preliminary Schedules*: Within 10 days after the Effective Date of the Contract (or as otherwise specifically required by the Contract Documents), Contractor shall submit to Engineer for timely review:
 1. a preliminary Progress Schedule indicating the times (numbers of days or dates) for starting and completing the various stages of the Work, including any Milestones specified in the Contract;
 2. a preliminary Schedule of Submittals; and

3. a preliminary Schedule of Values for all of the Work which includes quantities and prices of items which when added together equal the Contract Price and subdivides the Work into component parts in sufficient detail to serve as the basis for progress payments during performance of the Work. Such prices will include an appropriate amount of overhead and profit applicable to each item of Work.

2.04 *Preconstruction Conference; Designation of Authorized Representatives*

- A. Before any Work at the Site is started, a conference attended by Owner, Contractor, Engineer, and others as appropriate will be held to establish a working understanding among the parties as to the Work and to discuss the schedules referred to in Paragraph 2.03.A, procedures for handling Shop Drawings, Samples, and other submittals, processing Applications for Payment, electronic or digital transmittals, and maintaining required records.
- B. At this conference Owner and Contractor each shall designate, in writing, a specific individual to act as its authorized representative with respect to the services and responsibilities under the Contract. Such individuals shall have the authority to transmit and receive information, render decisions relative to the Contract, and otherwise act on behalf of each respective party.

2.05 *Initial Acceptance of Schedules*

- A. At least 10 days before submission of the first Application for Payment a conference, attended by Contractor, Engineer, and others as appropriate, will be held to review for acceptability to Engineer as provided below the schedules submitted in accordance with Paragraph 2.03.A. Contractor shall have an additional 10 days to make corrections and adjustments and to complete and resubmit the schedules. No progress payment shall be made to Contractor until acceptable schedules are submitted to Engineer.
 1. The Progress Schedule will be acceptable to Engineer if it provides an orderly progression of the Work to completion within the Contract Times. Such acceptance will not impose on Engineer responsibility for the Progress Schedule, for sequencing, scheduling, or progress of the Work, nor interfere with or relieve Contractor from Contractor's full responsibility therefor.
 2. Contractor's Schedule of Submittals will be acceptable to Engineer if it provides a workable arrangement for reviewing and processing the required submittals.
 3. Contractor's Schedule of Values will be acceptable to Engineer as to form and substance if it provides a reasonable allocation of the Contract Price to the component parts of the Work.

2.06 *Electronic Transmittals*

- A. Except as otherwise stated elsewhere in the Contract, the Owner, Engineer, and Contractor may transmit, and shall accept, Project-related correspondence, text, data, documents, drawings, information, and graphics, including but not limited to Shop Drawings and other submittals, in electronic media or digital format, either directly, or through access to a secure Project website.
- B. If the Contract does not establish protocols for electronic or digital transmittals, then Owner, Engineer, and Contractor shall jointly develop such protocols.
- C. When transmitting items in electronic media or digital format, the transmitting party makes no representations as to long term compatibility, usability, or readability of the items resulting from the recipient's use of software application packages, operating systems, or

computer hardware differing from those used in the drafting or transmittal of the items, or from those established in applicable transmittal protocols.

ARTICLE 3 – DOCUMENTS: INTENT, REQUIREMENTS, REUSE

3.01 *Intent*

- A. The Contract Documents are complementary; what is required by one is as binding as if required by all.
- B. It is the intent of the Contract Documents to describe a functionally complete project (or part thereof) to be constructed in accordance with the Contract Documents.
- C. Unless otherwise stated in the Contract Documents, if there is a discrepancy between the electronic or digital versions of the Contract Documents (including any printed copies derived from such electronic or digital versions) and the printed record version, the printed record version shall govern.
- D. The Contract supersedes prior negotiations, representations, and agreements, whether written or oral.
- E. Engineer will issue clarifications and interpretations of the Contract Documents as provided herein.

3.02 *Reference Standards*

- A. Standards Specifications, Codes, Laws and Regulations
 - 1. Reference in the Contract Documents to standard specifications, manuals, reference standards, or codes of any technical society, organization, or association, or to Laws or Regulations, whether such reference be specific or by implication, shall mean the standard specification, manual, reference standard, code, or Laws or Regulations in effect at the time of opening of Bids (or on the Effective Date of the Contract if there were no Bids), except as may be otherwise specifically stated in the Contract Documents.
 - 2. No provision of any such standard specification, manual, reference standard, or code, or any instruction of a Supplier, shall be effective to change the duties or responsibilities of Owner, Contractor, or Engineer, or any of their subcontractors, consultants, agents, or employees, from those set forth in the part of the Contract Documents prepared by or for Engineer. No such provision or instruction shall be effective to assign to Owner, Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors, any duty or authority to supervise or direct the performance of the Work or any duty or authority to undertake responsibility inconsistent with the provisions of the part of the Contract Documents prepared by or for Engineer.

3.03 *Reporting and Resolving Discrepancies*

- A. *Reporting Discrepancies:*
 - 1. *Contractor's Verification of Figures and Field Measurements:* Before undertaking each part of the Work, Contractor shall carefully study the Contract Documents, and check and verify pertinent figures and dimensions therein, particularly with respect to applicable field measurements. Contractor shall promptly report in writing to Engineer any conflict, error, ambiguity, or discrepancy that Contractor discovers, or has actual knowledge of, and shall not proceed with any Work affected thereby until the conflict,

error, ambiguity, or discrepancy is resolved, by a clarification or interpretation by Engineer, or by an amendment or supplement to the Contract Documents issued pursuant to Paragraph 11.01.

2. *Contractor's Review of Contract Documents:* If, before or during the performance of the Work, Contractor discovers any conflict, error, ambiguity, or discrepancy within the Contract Documents, or between the Contract Documents and (a) any applicable Law or Regulation, (b) actual field conditions, (c) any standard specification, manual, reference standard, or code, or (d) any instruction of any Supplier, then Contractor shall promptly report it to Engineer in writing. Contractor shall not proceed with the Work affected thereby (except in an emergency as required by Paragraph 7.15) until the conflict, error, ambiguity, or discrepancy is resolved, by a clarification or interpretation by Engineer, or by an amendment or supplement to the Contract Documents issued pursuant to Paragraph 11.01.
3. Contractor shall not be liable to Owner or Engineer for failure to report any conflict, error, ambiguity, or discrepancy in the Contract Documents unless Contractor had actual knowledge thereof.

B. *Resolving Discrepancies:*

1. Except as may be otherwise specifically stated in the Contract Documents, the provisions of the part of the Contract Documents prepared by or for Engineer shall take precedence in resolving any conflict, error, ambiguity, or discrepancy between such provisions of the Contract Documents and:
 - a. the provisions of any standard specification, manual, reference standard, or code, or the instruction of any Supplier (whether or not specifically incorporated by reference as a Contract Document); or
 - b. the provisions of any Laws or Regulations applicable to the performance of the Work (unless such an interpretation of the provisions of the Contract Documents would result in violation of such Law or Regulation).

3.04 *Requirements of the Contract Documents*

- A. During the performance of the Work and until final payment, Contractor and Owner shall submit to the Engineer all matters in question concerning the requirements of the Contract Documents (sometimes referred to as requests for information or interpretation—RFIs), or relating to the acceptability of the Work under the Contract Documents, as soon as possible after such matters arise. Engineer will be the initial interpreter of the requirements of the Contract Documents, and judge of the acceptability of the Work thereunder.
- B. Engineer will, with reasonable promptness, render a written clarification, interpretation, or decision on the issue submitted, or initiate an amendment or supplement to the Contract Documents. Engineer's written clarification, interpretation, or decision will be final and binding on Contractor, unless it appeals by submitting a Change Proposal, and on Owner, unless it appeals by filing a Claim.
- C. If a submitted matter in question concerns terms and conditions of the Contract Documents that do not involve (1) the performance or acceptability of the Work under the Contract Documents, (2) the design (as set forth in the Drawings, Specifications, or otherwise), or (3) other engineering or technical matters, then Engineer will promptly give written notice to Owner and Contractor that Engineer is unable to provide a decision or interpretation. If Owner and Contractor are unable to agree on resolution of such a matter in question, either party may pursue resolution as provided in Article 12.

3.05 *Reuse of Documents*

- A. Contractor and its Subcontractors and Suppliers shall not:
 - 1. have or acquire any title to or ownership rights in any of the Drawings, Specifications, or other documents (or copies of any thereof) prepared by or bearing the seal of Engineer or its consultants, including electronic media editions, or reuse any such Drawings, Specifications, other documents, or copies thereof on extensions of the Project or any other project without written consent of Owner and Engineer and specific written verification or adaptation by Engineer; or
 - 2. have or acquire any title or ownership rights in any other Contract Documents, reuse any such Contract Documents for any purpose without Owner's express written consent, or violate any copyrights pertaining to such Contract Documents.
- B. The prohibitions of this Paragraph 3.05 will survive final payment, or termination of the Contract. Nothing herein shall preclude Contractor from retaining copies of the Contract Documents for record purposes.

ARTICLE 4 – COMMENCEMENT AND PROGRESS OF THE WORK

4.01 *Commencement of Contract Times; Notice to Proceed*

- A. The Contract Times will commence to run on the thirtieth day after the Effective Date of the Contract or, if a Notice to Proceed is given, on the day indicated in the Notice to Proceed. A Notice to Proceed may be given at any time within 30 days after the Effective Date of the Contract. In no event will the Contract Times commence to run later than the sixtieth day after the day of Bid opening or the thirtieth day after the Effective Date of the Contract, whichever date is earlier.

4.02 *Starting the Work*

- A. Contractor shall start to perform the Work on the date when the Contract Times commence to run. No Work shall be done at the Site prior to such date.

4.03 *Reference Points*

- A. Owner shall provide engineering surveys to establish reference points for construction which in Engineer's judgment are necessary to enable Contractor to proceed with the Work. Contractor shall be responsible for laying out the Work, shall protect and preserve the established reference points and property monuments, and shall make no changes or relocations without the prior written approval of Owner. Contractor shall report to Engineer whenever any reference point or property monument is lost or destroyed or requires relocation because of necessary changes in grades or locations, and shall be responsible for the accurate replacement or relocation of such reference points or property monuments by professionally qualified personnel.

4.04 *Progress Schedule*

- A. Contractor shall adhere to the Progress Schedule established in accordance with Paragraph 2.05 as it may be adjusted from time to time as provided below.
 - 1. Contractor shall submit to Engineer for acceptance (to the extent indicated in Paragraph 2.05) proposed adjustments in the Progress Schedule that will not result in changing the Contract Times.

2. Proposed adjustments in the Progress Schedule that will change the Contract Times shall be submitted in accordance with the requirements of Article 11.
- B. Contractor shall carry on the Work and adhere to the Progress Schedule during all disputes or disagreements with Owner. No Work shall be delayed or postponed pending resolution of any disputes or disagreements, or during any appeal process, except as permitted by Paragraph 16.04, or as Owner and Contractor may otherwise agree in writing.

4.05 *Delays in Contractor's Progress*

- A. If Owner, Engineer, or anyone for whom Owner is responsible, delays, disrupts, or interferes with the performance or progress of the Work, then Contractor shall be entitled to an equitable adjustment in the Contract Times and Contract Price. Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times.
- B. Contractor shall not be entitled to an adjustment in Contract Price or Contract Times for delay, disruption, or interference caused by or within the control of Contractor. Delay, disruption, and interference attributable to and within the control of a Subcontractor or Supplier shall be deemed to be within the control of Contractor.
- C. If Contractor's performance or progress is delayed, disrupted, or interfered with by unanticipated causes not the fault of and beyond the control of Owner, Contractor, and those for which they are responsible, then Contractor shall be entitled to an equitable adjustment in Contract Times. Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times. Such an adjustment shall be Contractor's sole and exclusive remedy for the delays, disruption, and interference described in this paragraph. Causes of delay, disruption, or interference that may give rise to an adjustment in Contract Times under this paragraph include but are not limited to the following:
1. severe and unavoidable natural catastrophes such as fires, floods, epidemics, and earthquakes;
 2. abnormal weather conditions;
 3. acts or failures to act of utility owners (other than those performing other work at or adjacent to the Site by arrangement with the Owner, as contemplated in Article 8); and
 4. acts of war or terrorism.
- D. Delays, disruption, and interference to the performance or progress of the Work resulting from the existence of a differing subsurface or physical condition, an Underground Facility that was not shown or indicated by the Contract Documents, or not shown or indicated with reasonable accuracy, and those resulting from Hazardous Environmental Conditions, are governed by Article 5.
- E. Paragraph 8.03 governs delays, disruption, and interference to the performance or progress of the Work resulting from the performance of certain other work at or adjacent to the Site.
- F. Contractor shall not be entitled to an adjustment in Contract Price or Contract Times for any delay, disruption, or interference if such delay is concurrent with a delay, disruption, or interference caused by or within the control of Contractor.

- G. Contractor must submit any Change Proposal seeking an adjustment in Contract Price or Contract Times under this paragraph within 30 days of the commencement of the delaying, disrupting, or interfering event.

ARTICLE 5 – AVAILABILITY OF LANDS; SUBSURFACE AND PHYSICAL CONDITIONS; HAZARDOUS ENVIRONMENTAL CONDITIONS

5.01 Availability of Lands

- A. Owner shall furnish the Site. Owner shall notify Contractor of any encumbrances or restrictions not of general application but specifically related to use of the Site with which Contractor must comply in performing the Work.
- B. Upon reasonable written request, Owner shall furnish Contractor with a current statement of record legal title and legal description of the lands upon which permanent improvements are to be made and Owner's interest therein as necessary for giving notice of or filing a mechanic's or construction lien against such lands in accordance with applicable Laws and Regulations.
- C. Contractor shall provide for all additional lands and access thereto that may be required for temporary construction facilities or storage of materials and equipment.

5.02 Use of Site and Other Areas

A. Limitation on Use of Site and Other Areas:

1. Contractor shall confine construction equipment, temporary construction facilities, the storage of materials and equipment, and the operations of workers to the Site, adjacent areas that Contractor has arranged to use through construction easements or otherwise, and other adjacent areas permitted by Laws and Regulations, and shall not unreasonably encumber the Site and such other adjacent areas with construction equipment or other materials or equipment. Contractor shall assume full responsibility for (a) damage to the Site; (b) damage to any such other adjacent areas used for Contractor's operations; (c) damage to any other adjacent land or areas; and (d) for injuries and losses sustained by the owners or occupants of any such land or areas; provided that such damage or injuries result from the performance of the Work or from other actions or conduct of the Contractor or those for which Contractor is responsible.
2. If a damage or injury claim is made by the owner or occupant of any such land or area because of the performance of the Work, or because of other actions or conduct of the Contractor or those for which Contractor is responsible, Contractor shall (a) take immediate corrective or remedial action as required by Paragraph 7.12, or otherwise; (b) promptly attempt to settle the claim as to all parties through negotiations with such owner or occupant, or otherwise resolve the claim by arbitration or other dispute resolution proceeding, or at law; and (c) to the fullest extent permitted by Laws and Regulations, indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them from and against any such claim, and against all costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to any claim or action, legal or equitable, brought by any such owner or occupant against Owner, Engineer, or any other party indemnified hereunder to the extent caused directly or indirectly, in whole or in part

by, or based upon, Contractor's performance of the Work, or because of other actions or conduct of the Contractor or those for which Contractor is responsible.

- B. *Removal of Debris During Performance of the Work:* During the progress of the Work the Contractor shall keep the Site and other adjacent areas free from accumulations of waste materials, rubbish, and other debris. Removal and disposal of such waste materials, rubbish, and other debris shall conform to applicable Laws and Regulations.
- C. *Cleaning:* Prior to Substantial Completion of the Work Contractor shall clean the Site and the Work and make it ready for utilization by Owner. At the completion of the Work Contractor shall remove from the Site and adjacent areas all tools, appliances, construction equipment and machinery, and surplus materials and shall restore to original condition all property not designated for alteration by the Contract Documents.
- D. *Loading of Structures:* Contractor shall not load nor permit any part of any structure to be loaded in any manner that will endanger the structure, nor shall Contractor subject any part of the Work or adjacent structures or land to stresses or pressures that will endanger them.

5.03 *Subsurface and Physical Conditions*

- A. *Reports and Drawings:* The Supplementary Conditions identify:
 - 1. those reports known to Owner of explorations and tests of subsurface conditions at or adjacent to the Site;
 - 2. those drawings known to Owner of physical conditions relating to existing surface or subsurface structures at the Site (except Underground Facilities); and
 - 3. Technical Data contained in such reports and drawings.
- B. *Reliance by Contractor on Technical Data Authorized:* Contractor may rely upon the accuracy of the Technical Data expressly identified in the Supplementary Conditions with respect to such reports and drawings, but such reports and drawings are not Contract Documents. If no such express identification has been made, then Contractor may rely upon the accuracy of the Technical Data (as defined in Article 1) contained in any geotechnical or environmental report prepared for the Project and made available to Contractor. Except for such reliance on Technical Data, Contractor may not rely upon or make any claim against Owner or Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors, with respect to:
 - 1. the completeness of such reports and drawings for Contractor's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences, and procedures of construction to be employed by Contractor, and safety precautions and programs incident thereto; or
 - 2. other data, interpretations, opinions, and information contained in such reports or shown or indicated in such drawings; or
 - 3. any Contractor interpretation of or conclusion drawn from any Technical Data or any such other data, interpretations, opinions, or information.

5.04 *Differing Subsurface or Physical Conditions*

- A. *Notice by Contractor:* If Contractor believes that any subsurface or physical condition that is uncovered or revealed at the Site either:
1. is of such a nature as to establish that any Technical Data on which Contractor is entitled to rely as provided in Paragraph 5.03 is materially inaccurate; or
 2. is of such a nature as to require a change in the Drawings or Specifications; or
 3. differs materially from that shown or indicated in the Contract Documents; or
 4. is of an unusual nature, and differs materially from conditions ordinarily encountered and generally recognized as inherent in work of the character provided for in the Contract Documents;

then Contractor shall, promptly after becoming aware thereof and before further disturbing the subsurface or physical conditions or performing any Work in connection therewith (except in an emergency as required by Paragraph 7.15), notify Owner and Engineer in writing about such condition. Contractor shall not further disturb such condition or perform any Work in connection therewith (except with respect to an emergency) until receipt of a written statement permitting Contractor to do so.

- B. *Engineer's Review:* After receipt of written notice as required by the preceding paragraph, Engineer will promptly review the subsurface or physical condition in question; determine the necessity of Owner's obtaining additional exploration or tests with respect to the condition; conclude whether the condition falls within any one or more of the differing site condition categories in Paragraph 5.04.A above; obtain any pertinent cost or schedule information from Contractor; prepare recommendations to Owner regarding the Contractor's resumption of Work in connection with the subsurface or physical condition in question and the need for any change in the Drawings or Specifications; and advise Owner in writing of Engineer's findings, conclusions, and recommendations.
- C. *Owner's Statement to Contractor Regarding Site Condition:* After receipt of Engineer's written findings, conclusions, and recommendations, Owner shall issue a written statement to Contractor (with a copy to Engineer) regarding the subsurface or physical condition in question, addressing the resumption of Work in connection with such condition, indicating whether any change in the Drawings or Specifications will be made, and adopting or rejecting Engineer's written findings, conclusions, and recommendations, in whole or in part.
- D. *Possible Price and Times Adjustments:*
1. Contractor shall be entitled to an equitable adjustment in Contract Price or Contract Times, or both, to the extent that the existence of a differing subsurface or physical condition, or any related delay, disruption, or interference, causes an increase or decrease in Contractor's cost of, or time required for, performance of the Work; subject, however, to the following:
 - a. such condition must fall within any one or more of the categories described in Paragraph 5.04.A;
 - b. with respect to Work that is paid for on a unit price basis, any adjustment in Contract Price will be subject to the provisions of Paragraph 13.03; and,

- c. Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times.
2. Contractor shall not be entitled to any adjustment in the Contract Price or Contract Times with respect to a subsurface or physical condition if:
 - a. Contractor knew of the existence of such condition at the time Contractor made a commitment to Owner with respect to Contract Price and Contract Times by the submission of a Bid or becoming bound under a negotiated contract, or otherwise; or
 - b. the existence of such condition reasonably could have been discovered or revealed as a result of any examination, investigation, exploration, test, or study of the Site and contiguous areas expressly required by the Bidding Requirements or Contract Documents to be conducted by or for Contractor prior to Contractor's making such commitment; or
 - c. Contractor failed to give the written notice as required by Paragraph 5.04.A.
3. If Owner and Contractor agree regarding Contractor's entitlement to and the amount or extent of any adjustment in the Contract Price or Contract Times, or both, then any such adjustment shall be set forth in a Change Order.
4. Contractor may submit a Change Proposal regarding its entitlement to or the amount or extent of any adjustment in the Contract Price or Contract Times, or both, no later than 30 days after Owner's issuance of the Owner's written statement to Contractor regarding the subsurface or physical condition in question.

5.05 *Underground Facilities*

- A. *Contractor's Responsibilities:* The information and data shown or indicated in the Contract Documents with respect to existing Underground Facilities at or adjacent to the Site is based on information and data furnished to Owner or Engineer by the owners of such Underground Facilities, including Owner, or by others. Unless it is otherwise expressly provided in the Supplementary Conditions:
 1. Owner and Engineer do not warrant or guarantee the accuracy or completeness of any such information or data provided by others; and
 2. the cost of all of the following will be included in the Contract Price, and Contractor shall have full responsibility for:
 - a. reviewing and checking all information and data regarding existing Underground Facilities at the Site;
 - b. locating all Underground Facilities shown or indicated in the Contract Documents as being at the Site;
 - c. coordination of the Work with the owners (including Owner) of such Underground Facilities, during construction; and
 - d. the safety and protection of all existing Underground Facilities at the Site, and repairing any damage thereto resulting from the Work.
- B. *Notice by Contractor:* If Contractor believes that an Underground Facility that is uncovered or revealed at the Site was not shown or indicated in the Contract Documents, or was not shown or indicated with reasonable accuracy, then Contractor shall, promptly after

becoming aware thereof and before further disturbing conditions affected thereby or performing any Work in connection therewith (except in an emergency as required by Paragraph 7.15), identify the owner of such Underground Facility and give written notice to that owner and to Owner and Engineer.

- C. *Engineer's Review:* Engineer will promptly review the Underground Facility and conclude whether such Underground Facility was not shown or indicated in the Contract Documents, or was not shown or indicated with reasonable accuracy; obtain any pertinent cost or schedule information from Contractor; prepare recommendations to Owner regarding the Contractor's resumption of Work in connection with the Underground Facility in question; determine the extent, if any, to which a change is required in the Drawings or Specifications to reflect and document the consequences of the existence or location of the Underground Facility; and advise Owner in writing of Engineer's findings, conclusions, and recommendations. During such time, Contractor shall be responsible for the safety and protection of such Underground Facility.
- D. *Owner's Statement to Contractor Regarding Underground Facility:* After receipt of Engineer's written findings, conclusions, and recommendations, Owner shall issue a written statement to Contractor (with a copy to Engineer) regarding the Underground Facility in question, addressing the resumption of Work in connection with such Underground Facility, indicating whether any change in the Drawings or Specifications will be made, and adopting or rejecting Engineer's written findings, conclusions, and recommendations in whole or in part.
- E. *Possible Price and Times Adjustments:*
 - 1. Contractor shall be entitled to an equitable adjustment in the Contract Price or Contract Times, or both, to the extent that any existing Underground Facility at the Site that was not shown or indicated in the Contract Documents, or was not shown or indicated with reasonable accuracy, or any related delay, disruption, or interference, causes an increase or decrease in Contractor's cost of, or time required for, performance of the Work; subject, however, to the following:
 - a. Contractor did not know of and could not reasonably have been expected to be aware of or to have anticipated the existence or actual location of the Underground Facility in question;
 - b. With respect to Work that is paid for on a unit price basis, any adjustment in Contract Price will be subject to the provisions of Paragraph 13.03;
 - c. Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times; and
 - d. Contractor gave the notice required in Paragraph 5.05.B.
 - 2. If Owner and Contractor agree regarding Contractor's entitlement to and the amount or extent of any adjustment in the Contract Price or Contract Times, or both, then any such adjustment shall be set forth in a Change Order.
 - 3. Contractor may submit a Change Proposal regarding its entitlement to or the amount or extent of any adjustment in the Contract Price or Contract Times, or both, no later than 30 days after Owner's issuance of the Owner's written statement to Contractor regarding the Underground Facility in question.

5.06 *Hazardous Environmental Conditions at Site*

- A. *Reports and Drawings*: The Supplementary Conditions identify:
1. those reports and drawings known to Owner relating to Hazardous Environmental Conditions that have been identified at or adjacent to the Site; and
 2. Technical Data contained in such reports and drawings.
- B. *Reliance by Contractor on Technical Data Authorized*: Contractor may rely upon the accuracy of the Technical Data expressly identified in the Supplementary Conditions with respect to such reports and drawings, but such reports and drawings are not Contract Documents. If no such express identification has been made, then Contractor may rely on the accuracy of the Technical Data (as defined in Article 1) contained in any geotechnical or environmental report prepared for the Project and made available to Contractor. Except for such reliance on Technical Data, Contractor may not rely upon or make any claim against Owner or Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors with respect to:
1. the completeness of such reports and drawings for Contractor's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences and procedures of construction to be employed by Contractor and safety precautions and programs incident thereto; or
 2. other data, interpretations, opinions and information contained in such reports or shown or indicated in such drawings; or
 3. any Contractor interpretation of or conclusion drawn from any Technical Data or any such other data, interpretations, opinions or information.
- C. Contractor shall not be responsible for removing or remediating any Hazardous Environmental Condition encountered, uncovered, or revealed at the Site unless such removal or remediation is expressly identified in the Contract Documents to be within the scope of the Work.
- D. Contractor shall be responsible for controlling, containing, and duly removing all Constituents of Concern brought to the Site by Contractor, Subcontractors, Suppliers, or anyone else for whom Contractor is responsible, and for any associated costs; and for the costs of removing and remediating any Hazardous Environmental Condition created by the presence of any such Constituents of Concern.
- E. If Contractor encounters, uncovers, or reveals a Hazardous Environmental Condition whose removal or remediation is not expressly identified in the Contract Documents as being within the scope of the Work, or if Contractor or anyone for whom Contractor is responsible creates a Hazardous Environmental Condition, then Contractor shall immediately: (1) secure or otherwise isolate such condition; (2) stop all Work in connection with such condition and in any area affected thereby (except in an emergency as required by Paragraph 7.15); and (3) notify Owner and Engineer (and promptly thereafter confirm such notice in writing). Owner shall promptly consult with Engineer concerning the necessity for Owner to retain a qualified expert to evaluate such condition or take corrective action, if any. Promptly after consulting with Engineer, Owner shall take such actions as are necessary to permit Owner to timely obtain required permits and provide Contractor the written notice required by Paragraph 5.06.F. If Contractor or anyone for whom Contractor is responsible created the Hazardous Environmental Condition in question, then Owner may remove and remediate the Hazardous Environmental Condition, and impose a set-off against payments to account for the associated costs.

- F. Contractor shall not resume Work in connection with such Hazardous Environmental Condition or in any affected area until after Owner has obtained any required permits related thereto, and delivered written notice to Contractor either (1) specifying that such condition and any affected area is or has been rendered safe for the resumption of Work, or (2) specifying any special conditions under which such Work may be resumed safely.
- G. If Owner and Contractor cannot agree as to entitlement to or on the amount or extent, if any, of any adjustment in Contract Price or Contract Times, or both, as a result of such Work stoppage or such special conditions under which Work is agreed to be resumed by Contractor, then within 30 days of Owner's written notice regarding the resumption of Work, Contractor may submit a Change Proposal, or Owner may impose a set-off.
- H. If after receipt of such written notice Contractor does not agree to resume such Work based on a reasonable belief it is unsafe, or does not agree to resume such Work under such special conditions, then Owner may order the portion of the Work that is in the area affected by such condition to be deleted from the Work, following the contractual change procedures in Article 11. Owner may have such deleted portion of the Work performed by Owner's own forces or others in accordance with Article 8.
- I. To the fullest extent permitted by Laws and Regulations, Owner shall indemnify and hold harmless Contractor, Subcontractors, and Engineer, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to a Hazardous Environmental Condition, provided that such Hazardous Environmental Condition (1) was not shown or indicated in the Drawings, Specifications, or other Contract Documents, identified as Technical Data entitled to limited reliance pursuant to Paragraph 5.06.B, or identified in the Contract Documents to be included within the scope of the Work, and (2) was not created by Contractor or by anyone for whom Contractor is responsible. Nothing in this Paragraph 5.06.H shall obligate Owner to indemnify any individual or entity from and against the consequences of that individual's or entity's own negligence.
- J. To the fullest extent permitted by Laws and Regulations, Contractor shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to the failure to control, contain, or remove a Constituent of Concern brought to the Site by Contractor or by anyone for whom Contractor is responsible, or to a Hazardous Environmental Condition created by Contractor or by anyone for whom Contractor is responsible. Nothing in this Paragraph 5.06.J shall obligate Contractor to indemnify any individual or entity from and against the consequences of that individual's or entity's own negligence.
- K. The provisions of Paragraphs 5.03, 5.04, and 5.05 do not apply to the presence of Constituents of Concern or to a Hazardous Environmental Condition uncovered or revealed at the Site.

ARTICLE 6 – BONDS AND INSURANCE

6.01 *Performance, Payment, and Other Bonds*

- A. Contractor shall furnish a performance bond and a payment bond, each in an amount at least equal to the Contract Price, as security for the faithful performance and payment of all of Contractor's obligations under the Contract. These bonds shall remain in effect until one year after the date when final payment becomes due or until completion of the correction period specified in Paragraph 15.08, whichever is later, except as provided otherwise by Laws or Regulations, the Supplementary Conditions, or other specific provisions of the Contract. Contractor shall also furnish such other bonds as are required by the Supplementary Conditions or other specific provisions of the Contract.
- B. All bonds shall be in the form prescribed by the Contract except as provided otherwise by Laws or Regulations, and shall be executed by such sureties as are named in "Companies Holding Certificates of Authority as Acceptable Sureties on Federal Bonds and as Acceptable Reinsuring Companies" as published in Circular 570 (as amended and supplemented) by the Financial Management Service, Surety Bond Branch, U.S. Department of the Treasury. A bond signed by an agent or attorney-in-fact must be accompanied by a certified copy of that individual's authority to bind the surety. The evidence of authority shall show that it is effective on the date the agent or attorney-in-fact signed the accompanying bond.
- C. Contractor shall obtain the required bonds from surety companies that are duly licensed or authorized in the jurisdiction in which the Project is located to issue bonds in the required amounts.
- D. If the surety on a bond furnished by Contractor is declared bankrupt or becomes insolvent, or its right to do business is terminated in any state or jurisdiction where any part of the Project is located, or the surety ceases to meet the requirements above, then Contractor shall promptly notify Owner and Engineer and shall, within 20 days after the event giving rise to such notification, provide another bond and surety, both of which shall comply with the bond and surety requirements above.
- E. If Contractor has failed to obtain a required bond, Owner may exclude the Contractor from the Site and exercise Owner's termination rights under Article 16.
- F. Upon request, Owner shall provide a copy of the payment bond to any Subcontractor, Supplier, or other person or entity claiming to have furnished labor or materials used in the performance of the Work.

6.02 *Insurance—General Provisions*

- A. Owner and Contractor shall obtain and maintain insurance as required in this Article and in the Supplementary Conditions.
- B. All insurance required by the Contract to be purchased and maintained by Owner or Contractor shall be obtained from insurance companies that are duly licensed or authorized, in the state or jurisdiction in which the Project is located, to issue insurance policies for the required limits and coverages. Unless a different standard is indicated in the Supplementary Conditions, all companies that provide insurance policies required under this Contract shall have an A.M. Best rating of A-VII or better.
- C. Contractor shall deliver to Owner, with copies to each named insured and additional insured (as identified in this Article, in the Supplementary Conditions, or elsewhere in the Contract), certificates of insurance establishing that Contractor has obtained and is

maintaining the policies, coverages, and endorsements required by the Contract. Upon request by Owner or any other insured, Contractor shall also furnish other evidence of such required insurance, including but not limited to copies of policies and endorsements, and documentation of applicable self-insured retentions and deductibles. Contractor may block out (redact) any confidential premium or pricing information contained in any policy or endorsement furnished under this provision.

- D. Owner shall deliver to Contractor, with copies to each named insured and additional insured (as identified in this Article, the Supplementary Conditions, or elsewhere in the Contract), certificates of insurance establishing that Owner has obtained and is maintaining the policies, coverages, and endorsements required of Owner by the Contract (if any). Upon request by Contractor or any other insured, Owner shall also provide other evidence of such required insurance (if any), including but not limited to copies of policies and endorsements, and documentation of applicable self-insured retentions and deductibles. Owner may block out (redact) any confidential premium or pricing information contained in any policy or endorsement furnished under this provision.
- E. Failure of Owner or Contractor to demand such certificates or other evidence of the other party's full compliance with these insurance requirements, or failure of Owner or Contractor to identify a deficiency in compliance from the evidence provided, shall not be construed as a waiver of the other party's obligation to obtain and maintain such insurance.
- F. If either party does not purchase or maintain all of the insurance required of such party by the Contract, such party shall notify the other party in writing of such failure to purchase prior to the start of the Work, or of such failure to maintain prior to any change in the required coverage.
- G. If Contractor has failed to obtain and maintain required insurance, Owner may exclude the Contractor from the Site, impose an appropriate set-off against payment, and exercise Owner's termination rights under Article 16.
- H. Without prejudice to any other right or remedy, if a party has failed to obtain required insurance, the other party may elect to obtain equivalent insurance to protect such other party's interests at the expense of the party who was required to provide such coverage, and the Contract Price shall be adjusted accordingly.
- I. Owner does not represent that insurance coverage and limits established in this Contract necessarily will be adequate to protect Contractor or Contractor's interests.
- J. The insurance and insurance limits required herein shall not be deemed as a limitation on Contractor's liability under the indemnities granted to Owner and other individuals and entities in the Contract.

6.03 *Contractor's Insurance*

- A. *Workers' Compensation:* Contractor shall purchase and maintain workers' compensation and employer's liability insurance for:
 - 1. claims under workers' compensation, disability benefits, and other similar employee benefit acts.
 - 2. United States Longshoreman and Harbor Workers' Compensation Act and Jones Act coverage (if applicable).
 - 3. claims for damages because of bodily injury, occupational sickness or disease, or death of Contractor's employees (by stop-gap endorsement in monopolist worker's compensation states).

4. Foreign voluntary worker compensation (if applicable).
- B. *Commercial General Liability—Claims Covered:* Contractor shall purchase and maintain commercial general liability insurance, covering all operations by or on behalf of Contractor, on an occurrence basis, against:
1. claims for damages because of bodily injury, sickness or disease, or death of any person other than Contractor's employees.
 2. claims for damages insured by reasonably available personal injury liability coverage.
 3. claims for damages, other than to the Work itself, because of injury to or destruction of tangible property wherever located, including loss of use resulting therefrom.
- C. *Commercial General Liability—Form and Content:* Contractor's commercial liability policy shall be written on a 1996 (or later) ISO commercial general liability form (occurrence form) and include the following coverages and endorsements:
1. Products and completed operations coverage:
 - a. Such insurance shall be maintained for three years after final payment.
 - b. Contractor shall furnish Owner and each other additional insured (as identified in the Supplementary Conditions or elsewhere in the Contract) evidence of continuation of such insurance at final payment and three years thereafter.
 2. Blanket contractual liability coverage, to the extent permitted by law, including but not limited to coverage of Contractor's contractual indemnity obligations in Paragraph 7.18.
 3. Broad form property damage coverage.
 4. Severability of interest.
 5. Underground, explosion, and collapse coverage.
 6. Personal injury coverage.
 7. Additional insured endorsements that include both ongoing operations and products and completed operations coverage through ISO Endorsements CG 20 10 10 01 and CG 20 37 10 01 (together); or CG 20 10 07 04 and CG 20 37 07 04 (together); or their equivalent.
 8. For design professional additional insureds, ISO Endorsement CG 20 32 07 04, "Additional Insured—Engineers, Architects or Surveyors Not Engaged by the Named Insured" or its equivalent.
- D. *Automobile liability:* Contractor shall purchase and maintain automobile liability insurance against claims for damages because of bodily injury or death of any person or property damage arising out of the ownership, maintenance, or use of any motor vehicle. The automobile liability policy shall be written on an occurrence basis.
- E. *Umbrella or excess liability:* Contractor shall purchase and maintain umbrella or excess liability insurance written over the underlying employer's liability, commercial general liability, and automobile liability insurance described in the paragraphs above. Subject to industry-standard exclusions, the coverage afforded shall follow form as to each and every one of the underlying policies.
- F. *Contractor's pollution liability insurance:* Contractor shall purchase and maintain a policy covering third-party injury and property damage claims, including clean-up costs, as a result

of pollution conditions arising from Contractor's operations and completed operations. This insurance shall be maintained for no less than three years after final completion.

- G. *Additional insureds*: The Contractor's commercial general liability, automobile liability, umbrella or excess, and pollution liability policies shall include and list as additional insureds Owner and Engineer, and any individuals or entities identified in the Supplementary Conditions; include coverage for the respective officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of all such additional insureds; and the insurance afforded to these additional insureds shall provide primary coverage for all claims covered thereby (including as applicable those arising from both ongoing and completed operations) on a non-contributory basis. Contractor shall obtain all necessary endorsements to support these requirements.
- H. *Contractor's professional liability insurance*: If Contractor will provide or furnish professional services under this Contract, through a delegation of professional design services or otherwise, then Contractor shall be responsible for purchasing and maintaining applicable professional liability insurance. This insurance shall provide protection against claims arising out of performance of professional design or related services, and caused by a negligent error, omission, or act for which the insured party is legally liable. It shall be maintained throughout the duration of the Contract and for a minimum of two years after Substantial Completion. If such professional design services are performed by a Subcontractor, and not by Contractor itself, then the requirements of this paragraph may be satisfied through the purchasing and maintenance of such insurance by such Subcontractor.
- I. *General provisions*: The policies of insurance required by this Paragraph 6.03 shall:
 - 1. include at least the specific coverages provided in this Article.
 - 2. be written for not less than the limits of liability provided in this Article and in the Supplementary Conditions, or required by Laws or Regulations, whichever is greater.
 - 3. contain a provision or endorsement that the coverage afforded will not be canceled, materially changed, or renewal refused until at least 10 days prior written notice has been given to Contractor. Within three days of receipt of any such written notice, Contractor shall provide a copy of the notice to Owner, Engineer, and each other insured under the policy.
 - 4. remain in effect at least until final payment (and longer if expressly required in this Article) and at all times thereafter when Contractor may be correcting, removing, or replacing defective Work as a warranty or correction obligation, or otherwise, or returning to the Site to conduct other tasks arising from the Contract Documents.
 - 5. be appropriate for the Work being performed and provide protection from claims that may arise out of or result from Contractor's performance of the Work and Contractor's other obligations under the Contract Documents, whether it is to be performed by Contractor, any Subcontractor or Supplier, or by anyone directly or indirectly employed by any of them to perform any of the Work, or by anyone for whose acts any of them may be liable.
- J. The coverage requirements for specific policies of insurance must be met by such policies, and not by reference to excess or umbrella insurance provided in other policies.

6.04 *Owner's Liability Insurance*

- A. In addition to the insurance required to be provided by Contractor under Paragraph 6.03, Owner, at Owner's option, may purchase and maintain at Owner's expense Owner's own liability insurance as will protect Owner against claims which may arise from operations under the Contract Documents.
- B. Owner's liability policies, if any, operate separately and independently from policies required to be provided by Contractor, and Contractor cannot rely upon Owner's liability policies for any of Contractor's obligations to the Owner, Engineer, or third parties.

6.05 *Property Insurance*

- A. *Builder's Risk:* Unless otherwise provided in the Supplementary Conditions, Contractor shall purchase and maintain builder's risk insurance upon the Work on a completed value basis, in the amount of the full insurable replacement cost thereof (subject to such deductible amounts as may be provided in the Supplementary Conditions or required by Laws and Regulations). This insurance shall:
 - 1. include the Owner and Contractor as named insureds, and all Subcontractors, and any individuals or entities required by the Supplementary Conditions to be insured under such builder's risk policy, as insureds or named insureds. For purposes of the remainder of this Paragraph 6.05, Paragraphs 6.06 and 6.07, and any corresponding Supplementary Conditions, the parties required to be insured shall collectively be referred to as "insureds."
 - 2. be written on a builder's risk "all risk" policy form that shall at least include insurance for physical loss or damage to the Work, temporary buildings, falsework, and materials and equipment in transit, and shall insure against at least the following perils or causes of loss: fire; lightning; windstorm; riot; civil commotion; terrorism; vehicle impact; aircraft; smoke; theft; vandalism and malicious mischief; mechanical breakdown, boiler explosion, and artificially generated electric current; earthquake; volcanic activity, and other earth movement; flood; collapse; explosion; debris removal; demolition occasioned by enforcement of Laws and Regulations; water damage (other than that caused by flood); and such other perils or causes of loss as may be specifically required by the Supplementary Conditions. If insurance against mechanical breakdown, boiler explosion, and artificially generated electric current; earthquake; volcanic activity, and other earth movement; or flood, are not commercially available under builder's risk policies, by endorsement or otherwise, such insurance may be provided through other insurance policies acceptable to Owner and Contractor.
 - 3. cover, as insured property, at least the following: (a) the Work and all materials, supplies, machinery, apparatus, equipment, fixtures, and other property of a similar nature that are to be incorporated into or used in the preparation, fabrication, construction, erection, or completion of the Work, including Owner-furnished or assigned property; (b) spare parts inventory required within the scope of the Contract; and (c) temporary works which are not intended to form part of the permanent constructed Work but which are intended to provide working access to the Site, or to the Work under construction, or which are intended to provide temporary support for the Work under construction, including scaffolding, form work, fences, shoring, falsework, and temporary structures.
 - 4. cover expenses incurred in the repair or replacement of any insured property (including but not limited to fees and charges of engineers and architects).

5. extend to cover damage or loss to insured property while in temporary storage at the Site or in a storage location outside the Site (but not including property stored at the premises of a manufacturer or Supplier).
 6. extend to cover damage or loss to insured property while in transit.
 7. allow for partial occupation or use of the Work by Owner, such that those portions of the Work that are not yet occupied or used by Owner shall remain covered by the builder's risk insurance.
 8. allow for the waiver of the insurer's subrogation rights, as set forth below.
 9. provide primary coverage for all losses and damages caused by the perils or causes of loss covered.
 10. not include a co-insurance clause.
 11. include an exception for ensuing losses from physical damage or loss with respect to any defective workmanship, design, or materials exclusions.
 12. include performance/hot testing and start-up.
 13. be maintained in effect, subject to the provisions herein regarding Substantial Completion and partial occupancy or use of the Work by Owner, until the Work is complete.
- B. *Notice of Cancellation or Change:* All the policies of insurance (and the certificates or other evidence thereof) required to be purchased and maintained in accordance with this Paragraph 6.05 will contain a provision or endorsement that the coverage afforded will not be canceled or materially changed or renewal refused until at least 10 days prior written notice has been given to the purchasing policyholder. Within three days of receipt of any such written notice, the purchasing policyholder shall provide a copy of the notice to each other insured.
- C. *Deductibles:* The purchaser of any required builder's risk or property insurance shall pay for costs not covered because of the application of a policy deductible.
- D. *Partial Occupancy or Use by Owner:* If Owner will occupy or use a portion or portions of the Work prior to Substantial Completion of all the Work as provided in Paragraph 15.04, then Owner (directly, if it is the purchaser of the builder's risk policy, or through Contractor) will provide notice of such occupancy or use to the builder's risk insurer. The builder's risk insurance shall not be canceled or permitted to lapse on account of any such partial use or occupancy; rather, those portions of the Work that are occupied or used by Owner may come off the builder's risk policy, while those portions of the Work not yet occupied or used by Owner shall remain covered by the builder's risk insurance.
- E. *Additional Insurance:* If Contractor elects to obtain other special insurance to be included in or supplement the builder's risk or property insurance policies provided under this Paragraph 6.05, it may do so at Contractor's expense.
- F. *Insurance of Other Property:* If the express insurance provisions of the Contract do not require or address the insurance of a property item or interest, such as tools, construction equipment, or other personal property owned by Contractor, a Subcontractor, or an employee of Contractor or a Subcontractor, then the entity or individual owning such property item will be responsible for deciding whether to insure it, and if so in what amount.

6.06 *Waiver of Rights*

- A. All policies purchased in accordance with Paragraph 6.05, expressly including the builder's risk policy, shall contain provisions to the effect that in the event of payment of any loss or damage the insurers will have no rights of recovery against any insureds thereunder, or against Engineer or its consultants, or their officers, directors, members, partners, employees, agents, consultants, or subcontractors. Owner and Contractor waive all rights against each other and the respective officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them, for all losses and damages caused by, arising out of, or resulting from any of the perils or causes of loss covered by such policies and any other property insurance applicable to the Work; and, in addition, waive all such rights against Engineer, its consultants, all Subcontractors, all individuals or entities identified in the Supplementary Conditions as insureds, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them, under such policies for losses and damages so caused. None of the above waivers shall extend to the rights that any party making such waiver may have to the proceeds of insurance held by Owner or Contractor as trustee or fiduciary, or otherwise payable under any policy so issued.
- B. Owner waives all rights against Contractor, Subcontractors, and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them, for:
 - 1. loss due to business interruption, loss of use, or other consequential loss extending beyond direct physical loss or damage to Owner's property or the Work caused by, arising out of, or resulting from fire or other perils whether or not insured by Owner; and
 - 2. loss or damage to the completed Project or part thereof caused by, arising out of, or resulting from fire or other insured peril or cause of loss covered by any property insurance maintained on the completed Project or part thereof by Owner during partial occupancy or use pursuant to Paragraph 15.04, after Substantial Completion pursuant to Paragraph 15.03, or after final payment pursuant to Paragraph 15.06.
- C. Any insurance policy maintained by Owner covering any loss, damage or consequential loss referred to in Paragraph 6.06.B shall contain provisions to the effect that in the event of payment of any such loss, damage, or consequential loss, the insurers will have no rights of recovery against Contractor, Subcontractors, or Engineer, or the officers, directors, members, partners, employees, agents, consultants, or subcontractors of each and any of them.
- D. Contractor shall be responsible for assuring that the agreement under which a Subcontractor performs a portion of the Work contains provisions whereby the Subcontractor waives all rights against Owner, Contractor, all individuals or entities identified in the Supplementary Conditions as insureds, the Engineer and its consultants, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them, for all losses and damages caused by, arising out of, relating to, or resulting from any of the perils or causes of loss covered by builder's risk insurance and any other property insurance applicable to the Work.

6.07 *Receipt and Application of Property Insurance Proceeds*

- A. Any insured loss under the builder's risk and other policies of insurance required by Paragraph 6.05 will be adjusted and settled with the named insured that purchased the

policy. Such named insured shall act as fiduciary for the other insureds, and give notice to such other insureds that adjustment and settlement of a claim is in progress. Any other insured may state its position regarding a claim for insured loss in writing within 15 days after notice of such claim.

- B. Proceeds for such insured losses may be made payable by the insurer either jointly to multiple insureds, or to the named insured that purchased the policy in its own right and as fiduciary for other insureds, subject to the requirements of any applicable mortgage clause. A named insured receiving insurance proceeds under the builder's risk and other policies of insurance required by Paragraph 6.05 shall distribute such proceeds in accordance with such agreement as the parties in interest may reach, or as otherwise required under the dispute resolution provisions of this Contract or applicable Laws and Regulations.
- C. If no other special agreement is reached, the damaged Work shall be repaired or replaced, the money so received applied on account thereof, and the Work and the cost thereof covered by Change Order, if needed.

ARTICLE 7 – CONTRACTOR'S RESPONSIBILITIES

7.01 *Supervision and Superintendence*

- A. Contractor shall supervise, inspect, and direct the Work competently and efficiently, devoting such attention thereto and applying such skills and expertise as may be necessary to perform the Work in accordance with the Contract Documents. Contractor shall be solely responsible for the means, methods, techniques, sequences, and procedures of construction.
- B. At all times during the progress of the Work, Contractor shall assign a competent resident superintendent who shall not be replaced without written notice to Owner and Engineer except under extraordinary circumstances.

7.02 *Labor; Working Hours*

- A. Contractor shall provide competent, suitably qualified personnel to survey and lay out the Work and perform construction as required by the Contract Documents. Contractor shall at all times maintain good discipline and order at the Site.
- B. Except as otherwise required for the safety or protection of persons or the Work or property at the Site or adjacent thereto, and except as otherwise stated in the Contract Documents, all Work at the Site shall be performed during regular working hours, Monday through Friday. Contractor will not perform Work on a Saturday, Sunday, or any legal holiday. Contractor may perform Work outside regular working hours or on Saturdays, Sundays, or legal holidays only with Owner's written consent, which will not be unreasonably withheld.

7.03 *Services, Materials, and Equipment*

- A. Unless otherwise specified in the Contract Documents, Contractor shall provide and assume full responsibility for all services, materials, equipment, labor, transportation, construction equipment and machinery, tools, appliances, fuel, power, light, heat, telephone, water, sanitary facilities, temporary facilities, and all other facilities and incidentals necessary for the performance, testing, start up, and completion of the Work, whether or not such items are specifically called for in the Contract Documents.
- B. All materials and equipment incorporated into the Work shall be of good quality and new, except as otherwise provided in the Contract Documents. All special warranties and

guarantees required by the Specifications shall expressly run to the benefit of Owner. If required by Engineer, Contractor shall furnish satisfactory evidence (including reports of required tests) as to the source, kind, and quality of materials and equipment.

- C. All materials and equipment shall be stored, applied, installed, connected, erected, protected, used, cleaned, and conditioned in accordance with instructions of the applicable Supplier, except as otherwise may be provided in the Contract Documents.

7.04 "Or Equals"

- A. Whenever an item of material or equipment is specified or described in the Contract Documents by using the name of a proprietary item or the name of a particular Supplier, the Contract Price has been based upon Contractor furnishing such item as specified. The specification or description of such an item is intended to establish the type, function, appearance, and quality required. Unless the specification or description contains or is followed by words reading that no like, equivalent, or "or equal" item is permitted, Contractor may request that Engineer authorize the use of other items of material or equipment, or items from other proposed suppliers under the circumstances described below.
 - 1. If Engineer in its sole discretion determines that an item of material or equipment proposed by Contractor is functionally equal to that named and sufficiently similar so that no change in related Work will be required, Engineer shall deem it an "or equal" item. For the purposes of this paragraph, a proposed item of material or equipment will be considered functionally equal to an item so named if:
 - a. in the exercise of reasonable judgment Engineer determines that:
 - 1) it is at least equal in materials of construction, quality, durability, appearance, strength, and design characteristics;
 - 2) it will reliably perform at least equally well the function and achieve the results imposed by the design concept of the completed Project as a functioning whole;
 - 3) it has a proven record of performance and availability of responsive service; and
 - 4) it is not objectionable to Owner.
 - b. Contractor certifies that, if approved and incorporated into the Work:
 - 1) there will be no increase in cost to the Owner or increase in Contract Times; and
 - 2) it will conform substantially to the detailed requirements of the item named in the Contract Documents.
 - B. *Contractor's Expense:* Contractor shall provide all data in support of any proposed "or equal" item at Contractor's expense.
 - C. *Engineer's Evaluation and Determination:* Engineer will be allowed a reasonable time to evaluate each "or-equal" request. Engineer may require Contractor to furnish additional data about the proposed "or-equal" item. Engineer will be the sole judge of acceptability. No "or-equal" item will be ordered, furnished, installed, or utilized until Engineer's review is complete and Engineer determines that the proposed item is an "or-equal", which will be evidenced by an approved Shop Drawing or other written communication. Engineer will advise Contractor in writing of any negative determination.

- D. *Effect of Engineer's Determination:* Neither approval nor denial of an "or-equal" request shall result in any change in Contract Price. The Engineer's denial of an "or-equal" request shall be final and binding, and may not be reversed through an appeal under any provision of the Contract Documents.
- E. *Treatment as a Substitution Request:* If Engineer determines that an item of material or equipment proposed by Contractor does not qualify as an "or-equal" item, Contractor may request that Engineer considered the proposed item as a substitute pursuant to Paragraph 7.05.

7.05 *Substitutes*

- A. Unless the specification or description of an item of material or equipment required to be furnished under the Contract Documents contains or is followed by words reading that no substitution is permitted, Contractor may request that Engineer authorize the use of other items of material or equipment under the circumstances described below. To the extent possible such requests shall be made before commencement of related construction at the Site.
 - 1. Contractor shall submit sufficient information as provided below to allow Engineer to determine if the item of material or equipment proposed is functionally equivalent to that named and an acceptable substitute therefor. Engineer will not accept requests for review of proposed substitute items of material or equipment from anyone other than Contractor.
 - 2. The requirements for review by Engineer will be as set forth in Paragraph 7.05.B, as supplemented by the Specifications, and as Engineer may decide is appropriate under the circumstances.
 - 3. Contractor shall make written application to Engineer for review of a proposed substitute item of material or equipment that Contractor seeks to furnish or use. The application:
 - a. shall certify that the proposed substitute item will:
 - 1) perform adequately the functions and achieve the results called for by the general design,
 - 2) be similar in substance to that specified, and
 - 3) be suited to the same use as that specified.
 - b. will state:
 - 1) the extent, if any, to which the use of the proposed substitute item will necessitate a change in Contract Times,
 - 2) whether use of the proposed substitute item in the Work will require a change in any of the Contract Documents (or in the provisions of any other direct contract with Owner for other work on the Project) to adapt the design to the proposed substitute item, and
 - 3) whether incorporation or use of the proposed substitute item in connection with the Work is subject to payment of any license fee or royalty.
 - c. will identify:
 - 1) all variations of the proposed substitute item from that specified, and

- 2) available engineering, sales, maintenance, repair, and replacement services.
- d. shall contain an itemized estimate of all costs or credits that will result directly or indirectly from use of such substitute item, including but not limited to changes in Contract Price, shared savings, costs of redesign, and claims of other contractors affected by any resulting change.
- B. *Engineer's Evaluation and Determination:* Engineer will be allowed a reasonable time to evaluate each substitute request, and to obtain comments and direction from Owner. Engineer may require Contractor to furnish additional data about the proposed substitute item. Engineer will be the sole judge of acceptability. No substitute will be ordered, furnished, installed, or utilized until Engineer's review is complete and Engineer determines that the proposed item is an acceptable substitute. Engineer's determination will be evidenced by a Field Order or a proposed Change Order accounting for the substitution itself and all related impacts, including changes in Contract Price or Contract Times. Engineer will advise Contractor in writing of any negative determination.
- C. *Special Guarantee:* Owner may require Contractor to furnish at Contractor's expense a special performance guarantee or other surety with respect to any substitute.
- D. *Reimbursement of Engineer's Cost:* Engineer will record Engineer's costs in evaluating a substitute proposed or submitted by Contractor. Whether or not Engineer approves a substitute so proposed or submitted by Contractor, Contractor shall reimburse Owner for the reasonable charges of Engineer for evaluating each such proposed substitute. Contractor shall also reimburse Owner for the reasonable charges of Engineer for making changes in the Contract Documents (or in the provisions of any other direct contract with Owner) resulting from the acceptance of each proposed substitute.
- E. *Contractor's Expense:* Contractor shall provide all data in support of any proposed substitute at Contractor's expense.
- F. *Effect of Engineer's Determination:* If Engineer approves the substitution request, Contractor shall execute the proposed Change Order and proceed with the substitution. The Engineer's denial of a substitution request shall be final and binding, and may not be reversed through an appeal under any provision of the Contract Documents. Contractor may challenge the scope of reimbursement costs imposed under Paragraph 7.05.D, by timely submittal of a Change Proposal.

7.06 *Concerning Subcontractors, Suppliers, and Others*

- A. Contractor may retain Subcontractors and Suppliers for the performance of parts of the Work. Such Subcontractors and Suppliers must be acceptable to Owner.
- B. Contractor shall retain specific Subcontractors, Suppliers, or other individuals or entities for the performance of designated parts of the Work if required by the Contract to do so.
- C. Subsequent to the submittal of Contractor's Bid or final negotiation of the terms of the Contract, Owner may not require Contractor to retain any Subcontractor, Supplier, or other individual or entity to furnish or perform any of the Work against which Contractor has reasonable objection.
- D. Prior to entry into any binding subcontract or purchase order, Contractor shall submit to Owner the identity of the proposed Subcontractor or Supplier (unless Owner has already deemed such proposed Subcontractor or Supplier acceptable, during the bidding process or otherwise). Such proposed Subcontractor or Supplier shall be deemed acceptable to Owner unless Owner raises a substantive, reasonable objection within five days.

- E. Owner may require the replacement of any Subcontractor, Supplier, or other individual or entity retained by Contractor to perform any part of the Work. Owner also may require Contractor to retain specific replacements; provided, however, that Owner may not require a replacement to which Contractor has a reasonable objection. If Contractor has submitted the identity of certain Subcontractors, Suppliers, or other individuals or entities for acceptance by Owner, and Owner has accepted it (either in writing or by failing to make written objection thereto), then Owner may subsequently revoke the acceptance of any such Subcontractor, Supplier, or other individual or entity so identified solely on the basis of substantive, reasonable objection after due investigation. Contractor shall submit an acceptable replacement for the rejected Subcontractor, Supplier, or other individual or entity.
- F. If Owner requires the replacement of any Subcontractor, Supplier, or other individual or entity retained by Contractor to perform any part of the Work, then Contractor shall be entitled to an adjustment in Contract Price or Contract Times, or both, with respect to the replacement; and Contractor shall initiate a Change Proposal for such adjustment within 30 days of Owner's requirement of replacement.
- G. No acceptance by Owner of any such Subcontractor, Supplier, or other individual or entity, whether initially or as a replacement, shall constitute a waiver of the right of Owner to the completion of the Work in accordance with the Contract Documents.
- H. On a monthly basis Contractor shall submit to Engineer a complete list of all Subcontractors and Suppliers having a direct contract with Contractor, and of all other Subcontractors and Suppliers known to Contractor at the time of submittal.
- I. Contractor shall be fully responsible to Owner and Engineer for all acts and omissions of the Subcontractors, Suppliers, and other individuals or entities performing or furnishing any of the Work just as Contractor is responsible for Contractor's own acts and omissions.
- J. Contractor shall be solely responsible for scheduling and coordinating the work of Subcontractors, Suppliers, and all other individuals or entities performing or furnishing any of the Work.
- K. Contractor shall restrict all Subcontractors, Suppliers, and such other individuals or entities performing or furnishing any of the Work from communicating with Engineer or Owner, except through Contractor or in case of an emergency, or as otherwise expressly allowed herein.
- L. The divisions and sections of the Specifications and the identifications of any Drawings shall not control Contractor in dividing the Work among Subcontractors or Suppliers or delineating the Work to be performed by any specific trade.
- M. All Work performed for Contractor by a Subcontractor or Supplier shall be pursuant to an appropriate contractual agreement that specifically binds the Subcontractor or Supplier to the applicable terms and conditions of the Contract Documents for the benefit of Owner and Engineer.
- N. Owner may furnish to any Subcontractor or Supplier, to the extent practicable, information about amounts paid to Contractor on account of Work performed for Contractor by the particular Subcontractor or Supplier.

O. Nothing in the Contract Documents:

1. shall create for the benefit of any such Subcontractor, Supplier, or other individual or entity any contractual relationship between Owner or Engineer and any such Subcontractor, Supplier, or other individual or entity; nor
2. shall create any obligation on the part of Owner or Engineer to pay or to see to the payment of any money due any such Subcontractor, Supplier, or other individual or entity except as may otherwise be required by Laws and Regulations.

7.07 *Patent Fees and Royalties*

- A. Contractor shall pay all license fees and royalties and assume all costs incident to the use in the performance of the Work or the incorporation in the Work of any invention, design, process, product, or device which is the subject of patent rights or copyrights held by others. If a particular invention, design, process, product, or device is specified in the Contract Documents for use in the performance of the Work and if, to the actual knowledge of Owner or Engineer, its use is subject to patent rights or copyrights calling for the payment of any license fee or royalty to others, the existence of such rights shall be disclosed by Owner in the Contract Documents.
- B. To the fullest extent permitted by Laws and Regulations, Owner shall indemnify and hold harmless Contractor, and its officers, directors, members, partners, employees, agents, consultants, and subcontractors from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals, and all court or arbitration or other dispute resolution costs) arising out of or relating to any infringement of patent rights or copyrights incident to the use in the performance of the Work or resulting from the incorporation in the Work of any invention, design, process, product, or device specified in the Contract Documents, but not identified as being subject to payment of any license fee or royalty to others required by patent rights or copyrights.
- C. To the fullest extent permitted by Laws and Regulations, Contractor shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to any infringement of patent rights or copyrights incident to the use in the performance of the Work or resulting from the incorporation in the Work of any invention, design, process, product, or device not specified in the Contract Documents.

7.08 *Permits*

- A. Unless otherwise provided in the Contract Documents, Contractor shall obtain and pay for all construction permits and licenses. Owner shall assist Contractor, when necessary, in obtaining such permits and licenses. Contractor shall pay all governmental charges and inspection fees necessary for the prosecution of the Work which are applicable at the time of the submission of Contractor's Bid (or when Contractor became bound under a negotiated contract). Owner shall pay all charges of utility owners for connections for providing permanent service to the Work

7.09 *Taxes*

- A. Contractor shall pay all sales, consumer, use, and other similar taxes required to be paid by Contractor in accordance with the Laws and Regulations of the place of the Project which are applicable during the performance of the Work.

7.10 *Laws and Regulations*

- A. Contractor shall give all notices required by and shall comply with all Laws and Regulations applicable to the performance of the Work. Except where otherwise expressly required by applicable Laws and Regulations, neither Owner nor Engineer shall be responsible for monitoring Contractor's compliance with any Laws or Regulations.
- B. If Contractor performs any Work or takes any other action knowing or having reason to know that it is contrary to Laws or Regulations, Contractor shall bear all resulting costs and losses, and shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to such Work or other action. It shall not be Contractor's responsibility to make certain that the Work described in the Contract Documents is in accordance with Laws and Regulations, but this shall not relieve Contractor of Contractor's obligations under Paragraph 3.03.
- C. Owner or Contractor may give notice to the other party of any changes after the submission of Contractor's Bid (or after the date when Contractor became bound under a negotiated contract) in Laws or Regulations having an effect on the cost or time of performance of the Work, including but not limited to changes in Laws or Regulations having an effect on procuring permits and on sales, use, value-added, consumption, and other similar taxes. If Owner and Contractor are unable to agree on entitlement to or on the amount or extent, if any, of any adjustment in Contract Price or Contract Times resulting from such changes, then within 30 days of such notice Contractor may submit a Change Proposal, or Owner may initiate a Claim.

7.11 *Record Documents*

- A. Contractor shall maintain in a safe place at the Site one printed record copy of all Drawings, Specifications, Addenda, Change Orders, Work Change Directives, Field Orders, written interpretations and clarifications, and approved Shop Drawings. Contractor shall keep such record documents in good order and annotate them to show changes made during construction. These record documents, together with all approved Samples, will be available to Engineer for reference. Upon completion of the Work, Contractor shall deliver these record documents to Engineer.

7.12 *Safety and Protection*

- A. Contractor shall be solely responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the Work. Such responsibility does not relieve Subcontractors of their responsibility for the safety of persons or property in the performance of their work, nor for compliance with applicable safety Laws and Regulations. Contractor shall take all necessary precautions for the safety of, and shall provide the necessary protection to prevent damage, injury, or loss to:
 - 1. all persons on the Site or who may be affected by the Work;

2. all the Work and materials and equipment to be incorporated therein, whether in storage on or off the Site; and
 3. other property at the Site or adjacent thereto, including trees, shrubs, lawns, walks, pavements, roadways, structures, other work in progress, utilities, and Underground Facilities not designated for removal, relocation, or replacement in the course of construction.
- B. Contractor shall comply with all applicable Laws and Regulations relating to the safety of persons or property, or to the protection of persons or property from damage, injury, or loss; and shall erect and maintain all necessary safeguards for such safety and protection. Contractor shall notify Owner; the owners of adjacent property, Underground Facilities, and other utilities; and other contractors and utility owners performing work at or adjacent to the Site, when prosecution of the Work may affect them, and shall cooperate with them in the protection, removal, relocation, and replacement of their property or work in progress.
 - C. Contractor shall comply with the applicable requirements of Owner's safety programs, if any. The Supplementary Conditions identify any Owner's safety programs that are applicable to the Work.
 - D. Contractor shall inform Owner and Engineer of the specific requirements of Contractor's safety program with which Owner's and Engineer's employees and representatives must comply while at the Site.
 - E. All damage, injury, or loss to any property referred to in Paragraph 7.12.A.2 or 7.12.A.3 caused, directly or indirectly, in whole or in part, by Contractor, any Subcontractor, Supplier, or any other individual or entity directly or indirectly employed by any of them to perform any of the Work, or anyone for whose acts any of them may be liable, shall be remedied by Contractor at its expense (except damage or loss attributable to the fault of Drawings or Specifications or to the acts or omissions of Owner or Engineer or anyone employed by any of them, or anyone for whose acts any of them may be liable, and not attributable, directly or indirectly, in whole or in part, to the fault or negligence of Contractor or any Subcontractor, Supplier, or other individual or entity directly or indirectly employed by any of them).
 - F. Contractor's duties and responsibilities for safety and protection shall continue until such time as all the Work is completed and Engineer has issued a notice to Owner and Contractor in accordance with Paragraph 15.06.B that the Work is acceptable (except as otherwise expressly provided in connection with Substantial Completion).
 - G. Contractor's duties and responsibilities for safety and protection shall resume whenever Contractor or any Subcontractor or Supplier returns to the Site to fulfill warranty or correction obligations, or to conduct other tasks arising from the Contract Documents.

7.13 *Safety Representative*

- A. Contractor shall designate a qualified and experienced safety representative at the Site whose duties and responsibilities shall be the prevention of accidents and the maintaining and supervising of safety precautions and programs.

7.14 *Hazard Communication Programs*

- A. Contractor shall be responsible for coordinating any exchange of material safety data sheets or other hazard communication information required to be made available to or

exchanged between or among employers at the Site in accordance with Laws or Regulations.

7.15 *Emergencies*

- A. In emergencies affecting the safety or protection of persons or the Work or property at the Site or adjacent thereto, Contractor is obligated to act to prevent threatened damage, injury, or loss. Contractor shall give Engineer prompt written notice if Contractor believes that any significant changes in the Work or variations from the Contract Documents have been caused thereby or are required as a result thereof. If Engineer determines that a change in the Contract Documents is required because of the action taken by Contractor in response to such an emergency, a Work Change Directive or Change Order will be issued.

7.16 *Shop Drawings, Samples, and Other Submittals*

A. *Shop Drawing and Sample Submittal Requirements:*

- 1. Before submitting a Shop Drawing or Sample, Contractor shall have:
 - a. reviewed and coordinated the Shop Drawing or Sample with other Shop Drawings and Samples and with the requirements of the Work and the Contract Documents;
 - b. determined and verified all field measurements, quantities, dimensions, specified performance and design criteria, installation requirements, materials, catalog numbers, and similar information with respect thereto;
 - c. determined and verified the suitability of all materials and equipment offered with respect to the indicated application, fabrication, shipping, handling, storage, assembly, and installation pertaining to the performance of the Work; and
 - d. determined and verified all information relative to Contractor's responsibilities for means, methods, techniques, sequences, and procedures of construction, and safety precautions and programs incident thereto.
- 2. Each submittal shall bear a stamp or specific written certification that Contractor has satisfied Contractor's obligations under the Contract Documents with respect to Contractor's review of that submittal, and that Contractor approves the submittal.
- 3. With each submittal, Contractor shall give Engineer specific written notice of any variations that the Shop Drawing or Sample may have from the requirements of the Contract Documents. This notice shall be set forth in a written communication separate from the Shop Drawings or Sample submittal; and, in addition, in the case of Shop Drawings by a specific notation made on each Shop Drawing submitted to Engineer for review and approval of each such variation.

- B. *Submittal Procedures for Shop Drawings and Samples:* Contractor shall submit Shop Drawings and Samples to Engineer for review and approval in accordance with the accepted Schedule of Submittals. Each submittal will be identified as Engineer may require.

1. *Shop Drawings:*

- a. Contractor shall submit the number of copies required in the Specifications.
- b. Data shown on the Shop Drawings will be complete with respect to quantities, dimensions, specified performance and design criteria, materials, and similar data to show Engineer the services, materials, and equipment Contractor proposes to

provide and to enable Engineer to review the information for the limited purposes required by Paragraph 7.16.D.

2. *Samples:*
 - a. Contractor shall submit the number of Samples required in the Specifications.
 - b. Contractor shall clearly identify each Sample as to material, Supplier, pertinent data such as catalog numbers, the use for which intended and other data as Engineer may require to enable Engineer to review the submittal for the limited purposes required by Paragraph 7.16.D.
3. Where a Shop Drawing or Sample is required by the Contract Documents or the Schedule of Submittals, any related Work performed prior to Engineer's review and approval of the pertinent submittal will be at the sole expense and responsibility of Contractor.
- C. *Other Submittals:* Contractor shall submit other submittals to Engineer in accordance with the accepted Schedule of Submittals, and pursuant to the applicable terms of the Specifications.
- D. *Engineer's Review:*
 1. Engineer will provide timely review of Shop Drawings and Samples in accordance with the Schedule of Submittals acceptable to Engineer. Engineer's review and approval will be only to determine if the items covered by the submittals will, after installation or incorporation in the Work, conform to the information given in the Contract Documents and be compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents.
 2. Engineer's review and approval will not extend to means, methods, techniques, sequences, or procedures of construction or to safety precautions or programs incident thereto.
 3. Engineer's review and approval of a separate item as such will not indicate approval of the assembly in which the item functions.
 4. Engineer's review and approval of a Shop Drawing or Sample shall not relieve Contractor from responsibility for any variation from the requirements of the Contract Documents unless Contractor has complied with the requirements of Paragraph 7.16.A.3 and Engineer has given written approval of each such variation by specific written notation thereof incorporated in or accompanying the Shop Drawing or Sample. Engineer will document any such approved variation from the requirements of the Contract Documents in a Field Order.
 5. Engineer's review and approval of a Shop Drawing or Sample shall not relieve Contractor from responsibility for complying with the requirements of Paragraph 7.16.A and B.
 6. Engineer's review and approval of a Shop Drawing or Sample, or of a variation from the requirements of the Contract Documents, shall not, under any circumstances, change the Contract Times or Contract Price, unless such changes are included in a Change Order.
 7. Neither Engineer's receipt, review, acceptance or approval of a Shop Drawing, Sample, or other submittal shall result in such item becoming a Contract Document.

8. Contractor shall perform the Work in compliance with the requirements and commitments set forth in approved Shop Drawings and Samples, subject to the provisions of Paragraph 7.16.D.4.

E. *Resubmittal Procedures:*

1. Contractor shall make corrections required by Engineer and shall return the required number of corrected copies of Shop Drawings and submit, as required, new Samples for review and approval. Contractor shall direct specific attention in writing to revisions other than the corrections called for by Engineer on previous submittals.
2. Contractor shall furnish required submittals with sufficient information and accuracy to obtain required approval of an item with no more than three submittals. Engineer will record Engineer's time for reviewing a fourth or subsequent submittal of a Shop Drawings, sample, or other item requiring approval, and Contractor shall be responsible for Engineer's charges to Owner for such time. Owner may impose a set-off against payments due to Contractor to secure reimbursement for such charges.
3. If Contractor requests a change of a previously approved submittal item, Contractor shall be responsible for Engineer's charges to Owner for its review time, and Owner may impose a set-off against payments due to Contractor to secure reimbursement for such charges, unless the need for such change is beyond the control of Contractor.

7.17 *Contractor's General Warranty and Guarantee*

- A. Contractor warrants and guarantees to Owner that all Work will be in accordance with the Contract Documents and will not be defective. Engineer and its officers, directors, members, partners, employees, agents, consultants, and subcontractors shall be entitled to rely on Contractor's warranty and guarantee.
- B. Contractor's warranty and guarantee hereunder excludes defects or damage caused by:
 1. abuse, modification, or improper maintenance or operation by persons other than Contractor, Subcontractors, Suppliers, or any other individual or entity for whom Contractor is responsible; or
 2. normal wear and tear under normal usage.
- C. Contractor's obligation to perform and complete the Work in accordance with the Contract Documents shall be absolute. None of the following will constitute an acceptance of Work that is not in accordance with the Contract Documents or a release of Contractor's obligation to perform the Work in accordance with the Contract Documents:
 1. observations by Engineer;
 2. recommendation by Engineer or payment by Owner of any progress or final payment;
 3. the issuance of a certificate of Substantial Completion by Engineer or any payment related thereto by Owner;
 4. use or occupancy of the Work or any part thereof by Owner;
 5. any review and approval of a Shop Drawing or Sample submittal;
 6. the issuance of a notice of acceptability by Engineer;
 7. any inspection, test, or approval by others; or
 8. any correction of defective Work by Owner.

- D. If the Contract requires the Contractor to accept the assignment of a contract entered into by Owner, then the specific warranties, guarantees, and correction obligations contained in the assigned contract shall govern with respect to Contractor's performance obligations to Owner for the Work described in the assigned contract.

7.18 *Indemnification*

- A. To the fullest extent permitted by Laws and Regulations, and in addition to any other obligations of Contractor under the Contract or otherwise, Contractor shall indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them from and against all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to the performance of the Work, provided that any such claim, cost, loss, or damage is attributable to bodily injury, sickness, disease, or death, or to injury to or destruction of tangible property (other than the Work itself), including the loss of use resulting therefrom but only to the extent caused by any negligent act or omission of Contractor, any Subcontractor, any Supplier, or any individual or entity directly or indirectly employed by any of them to perform any of the Work or anyone for whose acts any of them may be liable.
- B. In any and all claims against Owner or Engineer or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors by any employee (or the survivor or personal representative of such employee) of Contractor, any Subcontractor, any Supplier, or any individual or entity directly or indirectly employed by any of them to perform any of the Work, or anyone for whose acts any of them may be liable, the indemnification obligation under Paragraph 7.18.A shall not be limited in any way by any limitation on the amount or type of damages, compensation, or benefits payable by or for Contractor or any such Subcontractor, Supplier, or other individual or entity under workers' compensation acts, disability benefit acts, or other employee benefit acts.
- C. The indemnification obligations of Contractor under Paragraph 7.18.A shall not extend to the liability of Engineer and Engineer's officers, directors, members, partners, employees, agents, consultants and subcontractors arising out of:
 - 1. the preparation or approval of, or the failure to prepare or approve maps, Drawings, opinions, reports, surveys, Change Orders, designs, or Specifications; or
 - 2. giving directions or instructions, or failing to give them, if that is the primary cause of the injury or damage.

7.19 *Delegation of Professional Design Services*

- A. Contractor will not be required to provide professional design services unless such services are specifically required by the Contract Documents for a portion of the Work or unless such services are required to carry out Contractor's responsibilities for construction means, methods, techniques, sequences and procedures. Contractor shall not be required to provide professional services in violation of applicable Laws and Regulations.
- B. If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of Contractor by the Contract Documents, Owner and Engineer will specify all performance and design criteria that such services must satisfy. Contractor shall cause such services or certifications to be provided by a properly licensed professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, and other submittals prepared by such professional. Shop

- Drawings and other submittals related to the Work designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to Engineer.
- C. Owner and Engineer shall be entitled to rely upon the adequacy, accuracy, and completeness of the services, certifications, or approvals performed by such design professionals, provided Owner and Engineer have specified to Contractor all performance and design criteria that such services must satisfy.
 - D. Pursuant to this paragraph, Engineer's review and approval of design calculations and design drawings will be only for the limited purpose of checking for conformance with performance and design criteria given and the design concept expressed in the Contract Documents. Engineer's review and approval of Shop Drawings and other submittals (except design calculations and design drawings) will be only for the purpose stated in Paragraph 7.16.D.1.
 - E. Contractor shall not be responsible for the adequacy of the performance or design criteria specified by Owner or Engineer.

ARTICLE 8 – OTHER WORK AT THE SITE

8.01 *Other Work*

- A. In addition to and apart from the Work under the Contract Documents, the Owner may perform other work at or adjacent to the Site. Such other work may be performed by Owner's employees, or through contracts between the Owner and third parties. Owner may also arrange to have third-party utility owners perform work on their utilities and facilities at or adjacent to the Site.
- B. If Owner performs other work at or adjacent to the Site with Owner's employees, or through contracts for such other work, then Owner shall give Contractor written notice thereof prior to starting any such other work. If Owner has advance information regarding the start of any utility work at or adjacent to the Site, Owner shall provide such information to Contractor.
- C. Contractor shall afford each other contractor that performs such other work, each utility owner performing other work, and Owner, if Owner is performing other work with Owner's employees, proper and safe access to the Site, and provide a reasonable opportunity for the introduction and storage of materials and equipment and the execution of such other work. Contractor shall do all cutting, fitting, and patching of the Work that may be required to properly connect or otherwise make its several parts come together and properly integrate with such other work. Contractor shall not endanger any work of others by cutting, excavating, or otherwise altering such work; provided, however, that Contractor may cut or alter others' work with the written consent of Engineer and the others whose work will be affected.
- D. If the proper execution or results of any part of Contractor's Work depends upon work performed by others under this Article 8, Contractor shall inspect such other work and promptly report to Engineer in writing any delays, defects, or deficiencies in such other work that render it unavailable or unsuitable for the proper execution and results of Contractor's Work. Contractor's failure to so report will constitute an acceptance of such other work as fit and proper for integration with Contractor's Work except for latent defects and deficiencies in such other work.

8.02 *Coordination*

- A. If Owner intends to contract with others for the performance of other work at or adjacent to the Site, to perform other work at or adjacent to the Site with Owner's employees, or to arrange to have utility owners perform work at or adjacent to the Site, the following will be set forth in the Supplementary Conditions or provided to Contractor prior to the start of any such other work:
 - 1. the identity of the individual or entity that will have authority and responsibility for coordination of the activities among the various contractors;
 - 2. an itemization of the specific matters to be covered by such authority and responsibility; and
 - 3. the extent of such authority and responsibilities.
- B. Unless otherwise provided in the Supplementary Conditions, Owner shall have sole authority and responsibility for such coordination.

8.03 *Legal Relationships*

- A. If, in the course of performing other work at or adjacent to the Site for Owner, the Owner's employees, any other contractor working for Owner, or any utility owner causes damage to the Work or to the property of Contractor or its Subcontractors, or delays, disrupts, interferes with, or increases the scope or cost of the performance of the Work, through actions or inaction, then Contractor shall be entitled to an equitable adjustment in the Contract Price or the Contract Times, or both. Contractor must submit any Change Proposal seeking an equitable adjustment in the Contract Price or the Contract Times under this paragraph within 30 days of the damaging, delaying, disrupting, or interfering event. The entitlement to, and extent of, any such equitable adjustment shall take into account information (if any) regarding such other work that was provided to Contractor in the Contract Documents prior to the submittal of the Bid or the final negotiation of the terms of the Contract. When applicable, any such equitable adjustment in Contract Price shall be conditioned on Contractor assigning to Owner all Contractor's rights against such other contractor or utility owner with respect to the damage, delay, disruption, or interference that is the subject of the adjustment. Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times.
- B. Contractor shall take reasonable and customary measures to avoid damaging, delaying, disrupting, or interfering with the work of Owner, any other contractor, or any utility owner performing other work at or adjacent to the Site. If Contractor fails to take such measures and as a result damages, delays, disrupts, or interferes with the work of any such other contractor or utility owner, then Owner may impose a set-off against payments due to Contractor, and assign to such other contractor or utility owner the Owner's contractual rights against Contractor with respect to the breach of the obligations set forth in this paragraph.
- C. When Owner is performing other work at or adjacent to the Site with Owner's employees, Contractor shall be liable to Owner for damage to such other work, and for the reasonable direct delay, disruption, and interference costs incurred by Owner as a result of Contractor's failure to take reasonable and customary measures with respect to Owner's other work. In response to such damage, delay, disruption, or interference, Owner may impose a set-off against payments due to Contractor.

- D. If Contractor damages, delays, disrupts, or interferes with the work of any other contractor, or any utility owner performing other work at or adjacent to the Site, through Contractor's failure to take reasonable and customary measures to avoid such impacts, or if any claim arising out of Contractor's actions, inactions, or negligence in performance of the Work at or adjacent to the Site is made by any such other contractor or utility owner against Contractor, Owner, or Engineer, then Contractor shall (1) promptly attempt to settle the claim as to all parties through negotiations with such other contractor or utility owner, or otherwise resolve the claim by arbitration or other dispute resolution proceeding or at law, and (2) indemnify and hold harmless Owner and Engineer, and the officers, directors, members, partners, employees, agents, consultants and subcontractors of each and any of them from and against any such claims, and against all costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to such damage, delay, disruption, or interference.

ARTICLE 9 – OWNER'S RESPONSIBILITIES

9.01 *Communications to Contractor*

- A. Except as otherwise provided in these General Conditions, Owner shall issue all communications to Contractor through Engineer.

9.02 *Replacement of Engineer*

- A. Owner may at its discretion appoint an engineer to replace Engineer, provided Contractor makes no reasonable objection to the replacement engineer. The replacement engineer's status under the Contract Documents shall be that of the former Engineer.

9.03 *Furnish Data*

- A. Owner shall promptly furnish the data required of Owner under the Contract Documents.

9.04 *Pay When Due*

- A. Owner shall make payments to Contractor when they are due as provided in the Agreement.

9.05 *Lands and Easements; Reports, Tests, and Drawings*

- A. Owner's duties with respect to providing lands and easements are set forth in Paragraph 5.01.
- B. Owner's duties with respect to providing engineering surveys to establish reference points are set forth in Paragraph 4.03.
- C. Article 5 refers to Owner's identifying and making available to Contractor copies of reports of explorations and tests of conditions at the Site, and drawings of physical conditions relating to existing surface or subsurface structures at the Site.

9.06 *Insurance*

- A. Owner's responsibilities, if any, with respect to purchasing and maintaining liability and property insurance are set forth in Article 6.

9.07 *Change Orders*

- A. Owner's responsibilities with respect to Change Orders are set forth in Article 11.

9.08 *Inspections, Tests, and Approvals*

- A. Owner's responsibility with respect to certain inspections, tests, and approvals is set forth in Paragraph 14.02.B.

9.09 *Limitations on Owner's Responsibilities*

- A. The Owner shall not supervise, direct, or have control or authority over, nor be responsible for, Contractor's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of Contractor to comply with Laws and Regulations applicable to the performance of the Work. Owner will not be responsible for Contractor's failure to perform the Work in accordance with the Contract Documents.

9.10 *Undisclosed Hazardous Environmental Condition*

- A. Owner's responsibility in respect to an undisclosed Hazardous Environmental Condition is set forth in Paragraph 5.06.

9.11 *Evidence of Financial Arrangements*

- A. Upon request of Contractor, Owner shall furnish Contractor reasonable evidence that financial arrangements have been made to satisfy Owner's obligations under the Contract Documents (including obligations under proposed changes in the Work).

9.12 *Safety Programs*

- A. While at the Site, Owner's employees and representatives shall comply with the specific applicable requirements of Contractor's safety programs of which Owner has been informed.
- B. Owner shall furnish copies of any applicable Owner safety programs to Contractor.

ARTICLE 10 – ENGINEER'S STATUS DURING CONSTRUCTION

10.01 *Owner's Representative*

- A. Engineer will be Owner's representative during the construction period. The duties and responsibilities and the limitations of authority of Engineer as Owner's representative during construction are set forth in the Contract.

10.02 *Visits to Site*

- A. Engineer will make visits to the Site at intervals appropriate to the various stages of construction as Engineer deems necessary in order to observe as an experienced and qualified design professional the progress that has been made and the quality of the various aspects of Contractor's executed Work. Based on information obtained during such visits and observations, Engineer, for the benefit of Owner, will determine, in general, if the Work is proceeding in accordance with the Contract Documents. Engineer will not be required to make exhaustive or continuous inspections on the Site to check the quality or quantity of the Work. Engineer's efforts will be directed toward providing for Owner a greater degree of confidence that the completed Work will conform generally to the Contract Documents. On the basis of such visits and observations, Engineer will keep Owner informed of the progress of the Work and will endeavor to guard Owner against defective Work.
- B. Engineer's visits and observations are subject to all the limitations on Engineer's authority and responsibility set forth in Paragraph 10.08. Particularly, but without limitation, during

or as a result of Engineer's visits or observations of Contractor's Work, Engineer will not supervise, direct, control, or have authority over or be responsible for Contractor's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of Contractor to comply with Laws and Regulations applicable to the performance of the Work.

10.03 *Project Representative*

- A. If Owner and Engineer have agreed that Engineer will furnish a Resident Project Representative to represent Engineer at the Site and assist Engineer in observing the progress and quality of the Work, then the authority and responsibilities of any such Resident Project Representative will be as provided in the Supplementary Conditions, and limitations on the responsibilities thereof will be as provided in Paragraph 10.08. If Owner designates another representative or agent to represent Owner at the Site who is not Engineer's consultant, agent, or employee, the responsibilities and authority and limitations thereon of such other individual or entity will be as provided in the Supplementary Conditions.

10.04 *Rejecting Defective Work*

- A. Engineer has the authority to reject Work in accordance with Article 14.

10.05 *Shop Drawings, Change Orders and Payments*

- A. Engineer's authority, and limitations thereof, as to Shop Drawings and Samples, are set forth in Paragraph 7.16.
- B. Engineer's authority, and limitations thereof, as to design calculations and design drawings submitted in response to a delegation of professional design services, if any, are set forth in Paragraph 7.19.
- C. Engineer's authority as to Change Orders is set forth in Article 11.
- D. Engineer's authority as to Applications for Payment is set forth in Article 15.

10.06 *Determinations for Unit Price Work*

- A. Engineer will determine the actual quantities and classifications of Unit Price Work performed by Contractor as set forth in Paragraph 13.03.

10.07 *Decisions on Requirements of Contract Documents and Acceptability of Work*

- A. Engineer will render decisions regarding the requirements of the Contract Documents, and judge the acceptability of the Work, pursuant to the specific procedures set forth herein for initial interpretations, Change Proposals, and acceptance of the Work. In rendering such decisions and judgments, Engineer will not show partiality to Owner or Contractor, and will not be liable to Owner, Contractor, or others in connection with any proceedings, interpretations, decisions, or judgments conducted or rendered in good faith.

10.08 *Limitations on Engineer's Authority and Responsibilities*

- A. Neither Engineer's authority or responsibility under this Article 10 or under any other provision of the Contract, nor any decision made by Engineer in good faith either to exercise or not exercise such authority or responsibility or the undertaking, exercise, or performance of any authority or responsibility by Engineer, shall create, impose, or give rise to any duty in contract, tort, or otherwise owed by Engineer to Contractor, any Subcontractor, any Supplier, any other individual or entity, or to any surety for or employee or agent of any of them.

- B. Engineer will not supervise, direct, control, or have authority over or be responsible for Contractor's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of Contractor to comply with Laws and Regulations applicable to the performance of the Work. Engineer will not be responsible for Contractor's failure to perform the Work in accordance with the Contract Documents.
- C. Engineer will not be responsible for the acts or omissions of Contractor or of any Subcontractor, any Supplier, or of any other individual or entity performing any of the Work.
- D. Engineer's review of the final Application for Payment and accompanying documentation and all maintenance and operating instructions, schedules, guarantees, bonds, certificates of inspection, tests and approvals, and other documentation required to be delivered by Paragraph 15.06.A will only be to determine generally that their content complies with the requirements of, and in the case of certificates of inspections, tests, and approvals, that the results certified indicate compliance with the Contract Documents.
- E. The limitations upon authority and responsibility set forth in this Paragraph 10.08 shall also apply to the Resident Project Representative, if any.

10.09 *Compliance with Safety Program*

- A. While at the Site, Engineer's employees and representatives will comply with the specific applicable requirements of Owner's and Contractor's safety programs (if any) of which Engineer has been informed.

ARTICLE 11 – AMENDING THE CONTRACT DOCUMENTS; CHANGES IN THE WORK

11.01 *Amending and Supplementing Contract Documents*

- A. The Contract Documents may be amended or supplemented by a Change Order, a Work Change Directive, or a Field Order.
 - 1. *Change Orders:*
 - a. If an amendment or supplement to the Contract Documents includes a change in the Contract Price or the Contract Times, such amendment or supplement must be set forth in a Change Order. A Change Order also may be used to establish amendments and supplements of the Contract Documents that do not affect the Contract Price or Contract Times.
 - b. Owner and Contractor may amend those terms and conditions of the Contract Documents that do not involve (1) the performance or acceptability of the Work, (2) the design (as set forth in the Drawings, Specifications, or otherwise), or (3) other engineering or technical matters, without the recommendation of the Engineer. Such an amendment shall be set forth in a Change Order.
 - 2. *Work Change Directives:* A Work Change Directive will not change the Contract Price or the Contract Times but is evidence that the parties expect that the modification ordered or documented by a Work Change Directive will be incorporated in a subsequently issued Change Order, following negotiations by the parties as to the Work Change Directive's effect, if any, on the Contract Price and Contract Times; or, if negotiations are unsuccessful, by a determination under the terms of the Contract Documents governing adjustments, expressly including Paragraph 11.04 regarding change of Contract Price. Contractor must submit any Change Proposal seeking an

adjustment of the Contract Price or the Contract Times, or both, no later than 30 days after the completion of the Work set out in the Work Change Directive. Owner must submit any Claim seeking an adjustment of the Contract Price or the Contract Times, or both, no later than 60 days after issuance of the Work Change Directive.

3. *Field Orders:* Engineer may authorize minor changes in the Work if the changes do not involve an adjustment in the Contract Price or the Contract Times and are compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. Such changes will be accomplished by a Field Order and will be binding on Owner and also on Contractor, which shall perform the Work involved promptly. If Contractor believes that a Field Order justifies an adjustment in the Contract Price or Contract Times, or both, then before proceeding with the Work at issue, Contractor shall submit a Change Proposal as provided herein.

11.02 *Owner-Authorized Changes in the Work*

- A. Without invalidating the Contract and without notice to any surety, Owner may, at any time or from time to time, order additions, deletions, or revisions in the Work. Such changes shall be supported by Engineer's recommendation, to the extent the change involves the design (as set forth in the Drawings, Specifications, or otherwise), or other engineering or technical matters. Such changes may be accomplished by a Change Order, if Owner and Contractor have agreed as to the effect, if any, of the changes on Contract Times or Contract Price; or by a Work Change Directive. Upon receipt of any such document, Contractor shall promptly proceed with the Work involved; or, in the case of a deletion in the Work, promptly cease construction activities with respect to such deleted Work. Added or revised Work shall be performed under the applicable conditions of the Contract Documents. Nothing in this paragraph shall obligate Contractor to undertake work that Contractor reasonably concludes cannot be performed in a manner consistent with Contractor's safety obligations under the Contract Documents or Laws and Regulations.

11.03 *Unauthorized Changes in the Work*

- A. Contractor shall not be entitled to an increase in the Contract Price or an extension of the Contract Times with respect to any work performed that is not required by the Contract Documents, as amended, modified, or supplemented, except in the case of an emergency as provided in Paragraph 7.15 or in the case of uncovering Work as provided in Paragraph 14.05.

11.04 *Change of Contract Price*

- A. The Contract Price may only be changed by a Change Order. Any Change Proposal for an adjustment in the Contract Price shall comply with the provisions of Paragraph 11.06. Any Claim for an adjustment of Contract Price shall comply with the provisions of Article 12.
- B. An adjustment in the Contract Price will be determined as follows:
 1. where the Work involved is covered by unit prices contained in the Contract Documents, then by application of such unit prices to the quantities of the items involved (subject to the provisions of Paragraph 13.03); or
 2. where the Work involved is not covered by unit prices contained in the Contract Documents, then by a mutually agreed lump sum (which may include an allowance for overhead and profit not necessarily in accordance with Paragraph 11.04.C.2); or
 3. where the Work involved is not covered by unit prices contained in the Contract Documents and the parties do not reach mutual agreement to a lump sum, then on

the basis of the Cost of the Work (determined as provided in Paragraph 13.01) plus a Contractor's fee for overhead and profit (determined as provided in Paragraph 11.04.C).

- C. *Contractor's Fee*: When applicable, the Contractor's fee for overhead and profit shall be determined as follows:
1. a mutually acceptable fixed fee; or
 2. if a fixed fee is not agreed upon, then a fee based on the following percentages of the various portions of the Cost of the Work:
 - a. for costs incurred under Paragraphs 13.01.B.1 and 13.01.B.2, the Contractor's fee shall be 15 percent;
 - b. for costs incurred under Paragraph 13.01.B.3, the Contractor's fee shall be five percent;
 - c. where one or more tiers of subcontracts are on the basis of Cost of the Work plus a fee and no fixed fee is agreed upon, the intent of Paragraphs 11.01.C.2.a and 11.01.C.2.b is that the Contractor's fee shall be based on: (1) a fee of 15 percent of the costs incurred under Paragraphs 13.01.A.1 and 13.01.A.2 by the Subcontractor that actually performs the Work, at whatever tier, and (2) with respect to Contractor itself and to any Subcontractors of a tier higher than that of the Subcontractor that actually performs the Work, a fee of five percent of the amount (fee plus underlying costs incurred) attributable to the next lower tier Subcontractor; provided, however, that for any such subcontracted work the maximum total fee to be paid by Owner shall be no greater than 27 percent of the costs incurred by the Subcontractor that actually performs the work;
 - d. no fee shall be payable on the basis of costs itemized under Paragraphs 13.01.B.4, 13.01.B.5, and 13.01.C;
 - e. the amount of credit to be allowed by Contractor to Owner for any change which results in a net decrease in cost will be the amount of the actual net decrease in cost plus a deduction in Contractor's fee by an amount equal to five percent of such net decrease; and
 - f. when both additions and credits are involved in any one change, the adjustment in Contractor's fee shall be computed on the basis of the net change in accordance with Paragraphs 11.04.C.2.a through 11.04.C.2.e, inclusive.

11.05 *Change of Contract Times*

- A. The Contract Times may only be changed by a Change Order. Any Change Proposal for an adjustment in the Contract Times shall comply with the provisions of Paragraph 11.06. Any Claim for an adjustment in the Contract Times shall comply with the provisions of Article 12.
- B. An adjustment of the Contract Times shall be subject to the limitations set forth in Paragraph 4.05, concerning delays in Contractor's progress.

11.06 *Change Proposals*

- A. Contractor shall submit a Change Proposal to Engineer to request an adjustment in the Contract Times or Contract Price; appeal an initial decision by Engineer concerning the requirements of the Contract Documents or relating to the acceptability of the Work under the Contract Documents; contest a set-off against payment due; or seek other relief under

the Contract. The Change Proposal shall specify any proposed change in Contract Times or Contract Price, or both, or other proposed relief, and explain the reason for the proposed change, with citations to any governing or applicable provisions of the Contract Documents.

1. *Procedures:* Contractor shall submit each Change Proposal to Engineer promptly (but in no event later than 30 days) after the start of the event giving rise thereto, or after such initial decision. The Contractor shall submit supporting data, including the proposed change in Contract Price or Contract Time (if any), to the Engineer and Owner within 15 days after the submittal of the Change Proposal. The supporting data shall be accompanied by a written statement that the supporting data are accurate and complete, and that any requested time or price adjustment is the entire adjustment to which Contractor believes it is entitled as a result of said event. Engineer will advise Owner regarding the Change Proposal, and consider any comments or response from Owner regarding the Change Proposal.
 2. *Engineer's Action:* Engineer will review each Change Proposal and, within 30 days after receipt of the Contractor's supporting data, either deny the Change Proposal in whole, approve it in whole, or deny it in part and approve it in part. Such actions shall be in writing, with a copy provided to Owner and Contractor. If Engineer does not take action on the Change Proposal within 30 days, then either Owner or Contractor may at any time thereafter submit a letter to the other party indicating that as a result of Engineer's inaction the Change Proposal is deemed denied, thereby commencing the time for appeal of the denial under Article 12.
 3. *Binding Decision:* Engineer's decision will be final and binding upon Owner and Contractor, unless Owner or Contractor appeals the decision by filing a Claim under Article 12.
- B. *Resolution of Certain Change Proposals:* If the Change Proposal does not involve the design (as set forth in the Drawings, Specifications, or otherwise), the acceptability of the Work, or other engineering or technical matters, then Engineer will notify the parties that the Engineer is unable to resolve the Change Proposal. For purposes of further resolution of such a Change Proposal, such notice shall be deemed a denial, and Contractor may choose to seek resolution under the terms of Article 12.

11.07 Execution of Change Orders

- A. Owner and Contractor shall execute appropriate Change Orders covering:
1. changes in the Contract Price or Contract Times which are agreed to by the parties, including any undisputed sum or amount of time for Work actually performed in accordance with a Work Change Directive;
 2. changes in Contract Price resulting from an Owner set-off, unless Contractor has duly contested such set-off;
 3. changes in the Work which are: (a) ordered by Owner pursuant to Paragraph 11.02, (b) required because of Owner's acceptance of defective Work under Paragraph 14.04 or Owner's correction of defective Work under Paragraph 14.07, or (c) agreed to by the parties, subject to the need for Engineer's recommendation if the change in the Work involves the design (as set forth in the Drawings, Specifications, or otherwise), or other engineering or technical matters; and
 4. changes in the Contract Price or Contract Times, or other changes, which embody the substance of any final and binding results under Paragraph 11.06, or Article 12.

- B. If Owner or Contractor refuses to execute a Change Order that is required to be executed under the terms of this Paragraph 11.07, it shall be deemed to be of full force and effect, as if fully executed.

11.08 *Notification to Surety*

- A. If the provisions of any bond require notice to be given to a surety of any change affecting the general scope of the Work or the provisions of the Contract Documents (including, but not limited to, Contract Price or Contract Times), the giving of any such notice will be Contractor's responsibility. The amount of each applicable bond will be adjusted to reflect the effect of any such change.

ARTICLE 12 – CLAIMS

12.01 *Claims*

- A. *Claims Process:* The following disputes between Owner and Contractor shall be submitted to the Claims process set forth in this Article:
 - 1. Appeals by Owner or Contractor of Engineer's decisions regarding Change Proposals;
 - 2. Owner demands for adjustments in the Contract Price or Contract Times, or other relief under the Contract Documents; and
 - 3. Disputes that Engineer has been unable to address because they do not involve the design (as set forth in the Drawings, Specifications, or otherwise), the acceptability of the Work, or other engineering or technical matters.
- B. *Submittal of Claim:* The party submitting a Claim shall deliver it directly to the other party to the Contract promptly (but in no event later than 30 days) after the start of the event giving rise thereto; in the case of appeals regarding Change Proposals within 30 days of the decision under appeal. The party submitting the Claim shall also furnish a copy to the Engineer, for its information only. The responsibility to substantiate a Claim shall rest with the party making the Claim. In the case of a Claim by Contractor seeking an increase in the Contract Times or Contract Price, or both, Contractor shall certify that the Claim is made in good faith, that the supporting data are accurate and complete, and that to the best of Contractor's knowledge and belief the amount of time or money requested accurately reflects the full amount to which Contractor is entitled.
- C. *Review and Resolution:* The party receiving a Claim shall review it thoroughly, giving full consideration to its merits. The two parties shall seek to resolve the Claim through the exchange of information and direct negotiations. The parties may extend the time for resolving the Claim by mutual agreement. All actions taken on a Claim shall be stated in writing and submitted to the other party, with a copy to Engineer.
- D. *Mediation:*
 - 1. At any time after initiation of a Claim, Owner and Contractor may mutually agree to mediation of the underlying dispute. The agreement to mediate shall stay the Claim submittal and response process.
 - 2. If Owner and Contractor agree to mediation, then after 60 days from such agreement, either Owner or Contractor may unilaterally terminate the mediation process, and the Claim submittal and decision process shall resume as of the date of the termination. If the mediation proceeds but is unsuccessful in resolving the dispute, the Claim

submittal and decision process shall resume as of the date of the conclusion of the mediation, as determined by the mediator.

3. Owner and Contractor shall each pay one-half of the mediator's fees and costs.
- E. *Partial Approval*: If the party receiving a Claim approves the Claim in part and denies it in part, such action shall be final and binding unless within 30 days of such action the other party invokes the procedure set forth in Article 17 for final resolution of disputes.
- F. *Denial of Claim*: If efforts to resolve a Claim are not successful, the party receiving the Claim may deny it by giving written notice of denial to the other party. If the receiving party does not take action on the Claim within 90 days, then either Owner or Contractor may at any time thereafter submit a letter to the other party indicating that as a result of the inaction, the Claim is deemed denied, thereby commencing the time for appeal of the denial. A denial of the Claim shall be final and binding unless within 30 days of the denial the other party invokes the procedure set forth in Article 17 for the final resolution of disputes.
- G. *Final and Binding Results*: If the parties reach a mutual agreement regarding a Claim, whether through approval of the Claim, direct negotiations, mediation, or otherwise; or if a Claim is approved in part and denied in part, or denied in full, and such actions become final and binding; then the results of the agreement or action on the Claim shall be incorporated in a Change Order to the extent they affect the Contract, including the Work, the Contract Times, or the Contract Price.

ARTICLE 13 – COST OF THE WORK; ALLOWANCES; UNIT PRICE WORK

13.01 Cost of the Work

- A. *Purposes for Determination of Cost of the Work*: The term Cost of the Work means the sum of all costs necessary for the proper performance of the Work at issue, as further defined below. The provisions of this Paragraph 13.01 are used for two distinct purposes:
 1. To determine Cost of the Work when Cost of the Work is a component of the Contract Price, under cost-plus-fee, time-and-materials, or other cost-based terms; or
 2. To determine the value of a Change Order, Change Proposal, Claim, set-off, or other adjustment in Contract Price. When the value of any such adjustment is determined on the basis of Cost of the Work, Contractor is entitled only to those additional or incremental costs required because of the change in the Work or because of the event giving rise to the adjustment.
- B. *Costs Included*: Except as otherwise may be agreed to in writing by Owner, costs included in the Cost of the Work shall be in amounts no higher than those prevailing in the locality of the Project, shall not include any of the costs itemized in Paragraph 13.01.C, and shall include only the following items:
 1. Payroll costs for employees in the direct employ of Contractor in the performance of the Work under schedules of job classifications agreed upon by Owner and Contractor. Such employees shall include, without limitation, superintendents, foremen, and other personnel employed full time on the Work. Payroll costs for employees not employed full time on the Work shall be apportioned on the basis of their time spent on the Work. Payroll costs shall include, but not be limited to, salaries and wages plus the cost of fringe benefits, which shall include social security contributions, unemployment, excise, and payroll taxes, workers' compensation, health and retirement benefits, bonuses, sick leave, and vacation and holiday pay applicable

thereto. The expenses of performing Work outside of regular working hours, on Saturday, Sunday, or legal holidays, shall be included in the above to the extent authorized by Owner.

2. Cost of all materials and equipment furnished and incorporated in the Work, including costs of transportation and storage thereof, and Suppliers' field services required in connection therewith. All cash discounts shall accrue to Contractor unless Owner deposits funds with Contractor with which to make payments, in which case the cash discounts shall accrue to Owner. All trade discounts, rebates, and refunds and returns from sale of surplus materials and equipment shall accrue to Owner, and Contractor shall make provisions so that they may be obtained.
3. Payments made by Contractor to Subcontractors for Work performed by Subcontractors. If required by Owner, Contractor shall obtain competitive bids from subcontractors acceptable to Owner and Contractor and shall deliver such bids to Owner, who will then determine, with the advice of Engineer, which bids, if any, will be acceptable. If any subcontract provides that the Subcontractor is to be paid on the basis of Cost of the Work plus a fee, the Subcontractor's Cost of the Work and fee shall be determined in the same manner as Contractor's Cost of the Work and fee as provided in this Paragraph 13.01.
4. Costs of special consultants (including but not limited to engineers, architects, testing laboratories, surveyors, attorneys, and accountants) employed for services specifically related to the Work.
5. Supplemental costs including the following:
 - a. The proportion of necessary transportation, travel, and subsistence expenses of Contractor's employees incurred in discharge of duties connected with the Work.
 - b. Cost, including transportation and maintenance, of all materials, supplies, equipment, machinery, appliances, office, and temporary facilities at the Site, and hand tools not owned by the workers, which are consumed in the performance of the Work, and cost, less market value, of such items used but not consumed which remain the property of Contractor.
 - c. Rentals of all construction equipment and machinery, and the parts thereof, whether rented from Contractor or others in accordance with rental agreements approved by Owner with the advice of Engineer, and the costs of transportation, loading, unloading, assembly, dismantling, and removal thereof. All such costs shall be in accordance with the terms of said rental agreements. The rental of any such equipment, machinery, or parts shall cease when the use thereof is no longer necessary for the Work.
 - d. Sales, consumer, use, and other similar taxes related to the Work, and for which Contractor is liable, as imposed by Laws and Regulations.
 - e. Deposits lost for causes other than negligence of Contractor, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable, and royalty payments and fees for permits and licenses.
 - f. Losses and damages (and related expenses) caused by damage to the Work, not compensated by insurance or otherwise, sustained by Contractor in connection with the performance of the Work (except losses and damages within the deductible amounts of property insurance established in accordance with Paragraph 6.05), provided such losses and damages have resulted from causes

other than the negligence of Contractor, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable. Such losses shall include settlements made with the written consent and approval of Owner. No such losses, damages, and expenses shall be included in the Cost of the Work for the purpose of determining Contractor's fee.

- g. The cost of utilities, fuel, and sanitary facilities at the Site.
- h. Minor expenses such as communication service at the Site, express and courier services, and similar petty cash items in connection with the Work.
- i. The costs of premiums for all bonds and insurance that Contractor is required by the Contract Documents to purchase and maintain.

C. *Costs Excluded:* The term Cost of the Work shall not include any of the following items:

1. Payroll costs and other compensation of Contractor's officers, executives, principals (of partnerships and sole proprietorships), general managers, safety managers, engineers, architects, estimators, attorneys, auditors, accountants, purchasing and contracting agents, expeditors, timekeepers, clerks, and other personnel employed by Contractor, whether at the Site or in Contractor's principal or branch office for general administration of the Work and not specifically included in the agreed upon schedule of job classifications referred to in Paragraph 13.01.B.1 or specifically covered by Paragraph 13.01.B.4. The payroll costs and other compensation excluded here are to be considered administrative costs covered by the Contractor's fee.
2. Expenses of Contractor's principal and branch offices other than Contractor's office at the Site.
3. Any part of Contractor's capital expenses, including interest on Contractor's capital employed for the Work and charges against Contractor for delinquent payments.
4. Costs due to the negligence of Contractor, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable, including but not limited to, the correction of defective Work, disposal of materials or equipment wrongly supplied, and making good any damage to property.
5. Other overhead or general expense costs of any kind and the costs of any item not specifically and expressly included in Paragraph 13.01.B.

D. *Contractor's Fee:* When the Work as a whole is performed on the basis of cost-plus, Contractor's fee shall be determined as set forth in the Agreement. When the value of any Work covered by a Change Order, Change Proposal, Claim, set-off, or other adjustment in Contract Price is determined on the basis of Cost of the Work, Contractor's fee shall be determined as set forth in Paragraph 11.04.C.

E. *Documentation:* Whenever the Cost of the Work for any purpose is to be determined pursuant to this Article 13, Contractor will establish and maintain records thereof in accordance with generally accepted accounting practices and submit in a form acceptable to Engineer an itemized cost breakdown together with supporting data.

13.02 Allowances

- A. It is understood that Contractor has included in the Contract Price all allowances so named in the Contract Documents and shall cause the Work so covered to be performed for such sums and by such persons or entities as may be acceptable to Owner and Engineer.

- B. *Cash Allowances*: Contractor agrees that:
 - 1. the cash allowances include the cost to Contractor (less any applicable trade discounts) of materials and equipment required by the allowances to be delivered at the Site, and all applicable taxes; and
 - 2. Contractor's costs for unloading and handling on the Site, labor, installation, overhead, profit, and other expenses contemplated for the cash allowances have been included in the Contract Price and not in the allowances, and no demand for additional payment on account of any of the foregoing will be valid.
- C. *Contingency Allowance*: Contractor agrees that a contingency allowance, if any, is for the sole use of Owner to cover unanticipated costs.
- D. Prior to final payment, an appropriate Change Order will be issued as recommended by Engineer to reflect actual amounts due Contractor on account of Work covered by allowances, and the Contract Price shall be correspondingly adjusted.

13.03 *Unit Price Work*

- A. Where the Contract Documents provide that all or part of the Work is to be Unit Price Work, initially the Contract Price will be deemed to include for all Unit Price Work an amount equal to the sum of the unit price for each separately identified item of Unit Price Work times the estimated quantity of each item as indicated in the Agreement.
- B. The estimated quantities of items of Unit Price Work are not guaranteed and are solely for the purpose of comparison of Bids and determining an initial Contract Price. Payments to Contractor for Unit Price Work will be based on actual quantities.
- C. Each unit price will be deemed to include an amount considered by Contractor to be adequate to cover Contractor's overhead and profit for each separately identified item.
- D. Engineer will determine the actual quantities and classifications of Unit Price Work performed by Contractor. Engineer will review with Contractor the Engineer's preliminary determinations on such matters before rendering a written decision thereon (by recommendation of an Application for Payment or otherwise). Engineer's written decision thereon will be final and binding (except as modified by Engineer to reflect changed factual conditions or more accurate data) upon Owner and Contractor, subject to the provisions of the following paragraph.
- E. Within 30 days of Engineer's written decision under the preceding paragraph, Contractor may submit a Change Proposal, or Owner may file a Claim, seeking an adjustment in the Contract Price if:
 - 1. the quantity of any item of Unit Price Work performed by Contractor differs materially and significantly from the estimated quantity of such item indicated in the Agreement;
 - 2. there is no corresponding adjustment with respect to any other item of Work; and
 - 3. Contractor believes that it is entitled to an increase in Contract Price as a result of having incurred additional expense or Owner believes that Owner is entitled to a decrease in Contract Price, and the parties are unable to agree as to the amount of any such increase or decrease.

ARTICLE 14 – TESTS AND INSPECTIONS; CORRECTION, REMOVAL OR ACCEPTANCE OF DEFECTIVE WORK

14.01 *Access to Work*

- A. Owner, Engineer, their consultants and other representatives and personnel of Owner, independent testing laboratories, and authorities having jurisdiction will have access to the Site and the Work at reasonable times for their observation, inspection, and testing. Contractor shall provide them proper and safe conditions for such access and advise them of Contractor's safety procedures and programs so that they may comply therewith as applicable.

14.02 *Tests, Inspections, and Approvals*

- A. Contractor shall give Engineer timely notice of readiness of the Work (or specific parts thereof) for all required inspections and tests, and shall cooperate with inspection and testing personnel to facilitate required inspections and tests.
- B. Owner shall retain and pay for the services of an independent inspector, testing laboratory, or other qualified individual or entity to perform all inspections and tests expressly required by the Contract Documents to be furnished and paid for by Owner, except that costs incurred in connection with tests or inspections of covered Work shall be governed by the provisions of Paragraph 14.05.
- C. If Laws or Regulations of any public body having jurisdiction require any Work (or part thereof) specifically to be inspected, tested, or approved by an employee or other representative of such public body, Contractor shall assume full responsibility for arranging and obtaining such inspections, tests, or approvals, pay all costs in connection therewith, and furnish Engineer the required certificates of inspection or approval.
- D. Contractor shall be responsible for arranging, obtaining, and paying for all inspections and tests required:
 - 1. by the Contract Documents, unless the Contract Documents expressly allocate responsibility for a specific inspection or test to Owner;
 - 2. to attain Owner's and Engineer's acceptance of materials or equipment to be incorporated in the Work;
 - 3. by manufacturers of equipment furnished under the Contract Documents;
 - 4. for testing, adjusting, and balancing of mechanical, electrical, and other equipment to be incorporated into the Work; and
 - 5. for acceptance of materials, mix designs, or equipment submitted for approval prior to Contractor's purchase thereof for incorporation in the Work.

Such inspections and tests shall be performed by independent inspectors, testing laboratories, or other qualified individuals or entities acceptable to Owner and Engineer.

- E. If the Contract Documents require the Work (or part thereof) to be approved by Owner, Engineer, or another designated individual or entity, then Contractor shall assume full responsibility for arranging and obtaining such approvals.
- F. If any Work (or the work of others) that is to be inspected, tested, or approved is covered by Contractor without written concurrence of Engineer, Contractor shall, if requested by Engineer, uncover such Work for observation. Such uncovering shall be at Contractor's expense unless Contractor had given Engineer timely notice of Contractor's intention to

cover the same and Engineer had not acted with reasonable promptness in response to such notice.

14.03 *Defective Work*

- A. *Contractor's Obligation*: It is Contractor's obligation to assure that the Work is not defective.
- B. *Engineer's Authority*: Engineer has the authority to determine whether Work is defective, and to reject defective Work.
- C. *Notice of Defects*: Prompt notice of all defective Work of which Owner or Engineer has actual knowledge will be given to Contractor.
- D. *Correction, or Removal and Replacement*: Promptly after receipt of written notice of defective Work, Contractor shall correct all such defective Work, whether or not fabricated, installed, or completed, or, if Engineer has rejected the defective Work, remove it from the Project and replace it with Work that is not defective.
- E. *Preservation of Warranties*: When correcting defective Work, Contractor shall take no action that would void or otherwise impair Owner's special warranty and guarantee, if any, on said Work.
- F. *Costs and Damages*: In addition to its correction, removal, and replacement obligations with respect to defective Work, Contractor shall pay all claims, costs, losses, and damages arising out of or relating to defective Work, including but not limited to the cost of the inspection, testing, correction, removal, replacement, or reconstruction of such defective Work, fines levied against Owner by governmental authorities because the Work is defective, and the costs of repair or replacement of work of others resulting from defective Work. Prior to final payment, if Owner and Contractor are unable to agree as to the measure of such claims, costs, losses, and damages resulting from defective Work, then Owner may impose a reasonable set-off against payments due under Article 15.

14.04 *Acceptance of Defective Work*

- A. If, instead of requiring correction or removal and replacement of defective Work, Owner prefers to accept it, Owner may do so (subject, if such acceptance occurs prior to final payment, to Engineer's confirmation that such acceptance is in general accord with the design intent and applicable engineering principles, and will not endanger public safety). Contractor shall pay all claims, costs, losses, and damages attributable to Owner's evaluation of and determination to accept such defective Work (such costs to be approved by Engineer as to reasonableness), and for the diminished value of the Work to the extent not otherwise paid by Contractor. If any such acceptance occurs prior to final payment, the necessary revisions in the Contract Documents with respect to the Work shall be incorporated in a Change Order. If the parties are unable to agree as to the decrease in the Contract Price, reflecting the diminished value of Work so accepted, then Owner may impose a reasonable set-off against payments due under Article 15. If the acceptance of defective Work occurs after final payment, Contractor shall pay an appropriate amount to Owner.

14.05 *Uncovering Work*

- A. Engineer has the authority to require special inspection or testing of the Work, whether or not the Work is fabricated, installed, or completed.

- B. If any Work is covered contrary to the written request of Engineer, then Contractor shall, if requested by Engineer, uncover such Work for Engineer's observation, and then replace the covering, all at Contractor's expense.
- C. If Engineer considers it necessary or advisable that covered Work be observed by Engineer or inspected or tested by others, then Contractor, at Engineer's request, shall uncover, expose, or otherwise make available for observation, inspection, or testing as Engineer may require, that portion of the Work in question, and provide all necessary labor, material, and equipment.
 - 1. If it is found that the uncovered Work is defective, Contractor shall be responsible for all claims, costs, losses, and damages arising out of or relating to such uncovering, exposure, observation, inspection, and testing, and of satisfactory replacement or reconstruction (including but not limited to all costs of repair or replacement of work of others); and pending Contractor's full discharge of this responsibility the Owner shall be entitled to impose a reasonable set-off against payments due under Article 15.
 - 2. If the uncovered Work is not found to be defective, Contractor shall be allowed an increase in the Contract Price or an extension of the Contract Times, or both, directly attributable to such uncovering, exposure, observation, inspection, testing, replacement, and reconstruction. If the parties are unable to agree as to the amount or extent thereof, then Contractor may submit a Change Proposal within 30 days of the determination that the Work is not defective.

14.06 *Owner May Stop the Work*

- A. If the Work is defective, or Contractor fails to supply sufficient skilled workers or suitable materials or equipment, or fails to perform the Work in such a way that the completed Work will conform to the Contract Documents, then Owner may order Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, this right of Owner to stop the Work shall not give rise to any duty on the part of Owner to exercise this right for the benefit of Contractor, any Subcontractor, any Supplier, any other individual or entity, or any surety for, or employee or agent of any of them.

14.07 *Owner May Correct Defective Work*

- A. If Contractor fails within a reasonable time after written notice from Engineer to correct defective Work, or to remove and replace rejected Work as required by Engineer, or if Contractor fails to perform the Work in accordance with the Contract Documents, or if Contractor fails to comply with any other provision of the Contract Documents, then Owner may, after seven days written notice to Contractor, correct or remedy any such deficiency.
- B. In exercising the rights and remedies under this Paragraph 14.07, Owner shall proceed expeditiously. In connection with such corrective or remedial action, Owner may exclude Contractor from all or part of the Site, take possession of all or part of the Work and suspend Contractor's services related thereto, and incorporate in the Work all materials and equipment stored at the Site or for which Owner has paid Contractor but which are stored elsewhere. Contractor shall allow Owner, Owner's representatives, agents and employees, Owner's other contractors, and Engineer and Engineer's consultants access to the Site to enable Owner to exercise the rights and remedies under this paragraph.
- C. All claims, costs, losses, and damages incurred or sustained by Owner in exercising the rights and remedies under this Paragraph 14.07 will be charged against Contractor as set-offs against payments due under Article 15. Such claims, costs, losses and damages will

include but not be limited to all costs of repair, or replacement of work of others destroyed or damaged by correction, removal, or replacement of Contractor's defective Work.

- D. Contractor shall not be allowed an extension of the Contract Times because of any delay in the performance of the Work attributable to the exercise by Owner of Owner's rights and remedies under this Paragraph 14.07.

ARTICLE 15 – PAYMENTS TO CONTRACTOR; SET-OFFS; COMPLETION; CORRECTION PERIOD

15.01 Progress Payments

- A. *Basis for Progress Payments:* The Schedule of Values established as provided in Article 2 will serve as the basis for progress payments and will be incorporated into a form of Application for Payment acceptable to Engineer. Progress payments on account of Unit Price Work will be based on the number of units completed during the pay period, as determined under the provisions of Paragraph 13.03. Progress payments for cost-based Work will be based on Cost of the Work completed by Contractor during the pay period.
- B. *Applications for Payments:*
 - 1. At least 20 days before the date established in the Agreement for each progress payment (but not more often than once a month), Contractor shall submit to Engineer for review an Application for Payment filled out and signed by Contractor covering the Work completed as of the date of the Application and accompanied by such supporting documentation as is required by the Contract Documents. If payment is requested on the basis of materials and equipment not incorporated in the Work but delivered and suitably stored at the Site or at another location agreed to in writing, the Application for Payment shall also be accompanied by a bill of sale, invoice, or other documentation warranting that Owner has received the materials and equipment free and clear of all Liens, and evidence that the materials and equipment are covered by appropriate property insurance, a warehouse bond, or other arrangements to protect Owner's interest therein, all of which must be satisfactory to Owner.
 - 2. Beginning with the second Application for Payment, each Application shall include an affidavit of Contractor stating that all previous progress payments received on account of the Work have been applied on account to discharge Contractor's legitimate obligations associated with prior Applications for Payment.
 - 3. The amount of retainage with respect to progress payments will be as stipulated in the Agreement.
- C. *Review of Applications:*
 - 1. Engineer will, within 10 days after receipt of each Application for Payment, including each resubmittal, either indicate in writing a recommendation of payment and present the Application to Owner, or return the Application to Contractor indicating in writing Engineer's reasons for refusing to recommend payment. In the latter case, Contractor may make the necessary corrections and resubmit the Application.
 - 2. Engineer's recommendation of any payment requested in an Application for Payment will constitute a representation by Engineer to Owner, based on Engineer's observations of the executed Work as an experienced and qualified design professional, and on Engineer's review of the Application for Payment and the accompanying data and schedules, that to the best of Engineer's knowledge, information and belief:

- a. the Work has progressed to the point indicated;
 - b. the quality of the Work is generally in accordance with the Contract Documents (subject to an evaluation of the Work as a functioning whole prior to or upon Substantial Completion, the results of any subsequent tests called for in the Contract Documents, a final determination of quantities and classifications for Unit Price Work under Paragraph 13.03, and any other qualifications stated in the recommendation); and
 - c. the conditions precedent to Contractor's being entitled to such payment appear to have been fulfilled in so far as it is Engineer's responsibility to observe the Work.
3. By recommending any such payment Engineer will not thereby be deemed to have represented that:
- a. inspections made to check the quality or the quantity of the Work as it has been performed have been exhaustive, extended to every aspect of the Work in progress, or involved detailed inspections of the Work beyond the responsibilities specifically assigned to Engineer in the Contract; or
 - b. there may not be other matters or issues between the parties that might entitle Contractor to be paid additionally by Owner or entitle Owner to withhold payment to Contractor.
4. Neither Engineer's review of Contractor's Work for the purposes of recommending payments nor Engineer's recommendation of any payment, including final payment, will impose responsibility on Engineer:
- a. to supervise, direct, or control the Work, or
 - b. for the means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or
 - c. for Contractor's failure to comply with Laws and Regulations applicable to Contractor's performance of the Work, or
 - d. to make any examination to ascertain how or for what purposes Contractor has used the money paid on account of the Contract Price, or
 - e. to determine that title to any of the Work, materials, or equipment has passed to Owner free and clear of any Liens.
5. Engineer may refuse to recommend the whole or any part of any payment if, in Engineer's opinion, it would be incorrect to make the representations to Owner stated in Paragraph 15.01.C.2.
6. Engineer will recommend reductions in payment (set-offs) necessary in Engineer's opinion to protect Owner from loss because:
- a. the Work is defective, requiring correction or replacement;
 - b. the Contract Price has been reduced by Change Orders;
 - c. Owner has been required to correct defective Work in accordance with Paragraph 14.07, or has accepted defective Work pursuant to Paragraph 14.04;
 - d. Owner has been required to remove or remediate a Hazardous Environmental Condition for which Contractor is responsible; or

- e. Engineer has actual knowledge of the occurrence of any of the events that would constitute a default by Contractor and therefore justify termination for cause under the Contract Documents.
- D. *Payment Becomes Due:*
- 1. Ten days after presentation of the Application for Payment to Owner with Engineer's recommendation, the amount recommended (subject to any Owner set-offs) will become due, and when due will be paid by Owner to Contractor.
- E. *Reductions in Payment by Owner:*
- 1. In addition to any reductions in payment (set-offs) recommended by Engineer, Owner is entitled to impose a set-off against payment based on any of the following:
 - a. claims have been made against Owner on account of Contractor's conduct in the performance or furnishing of the Work, or Owner has incurred costs, losses, or damages on account of Contractor's conduct in the performance or furnishing of the Work, including but not limited to claims, costs, losses, or damages from workplace injuries, adjacent property damage, non-compliance with Laws and Regulations, and patent infringement;
 - b. Contractor has failed to take reasonable and customary measures to avoid damage, delay, disruption, and interference with other work at or adjacent to the Site;
 - c. Contractor has failed to provide and maintain required bonds or insurance;
 - d. Owner has been required to remove or remediate a Hazardous Environmental Condition for which Contractor is responsible;
 - e. Owner has incurred extra charges or engineering costs related to submittal reviews, evaluations of proposed substitutes, tests and inspections, or return visits to manufacturing or assembly facilities;
 - f. the Work is defective, requiring correction or replacement;
 - g. Owner has been required to correct defective Work in accordance with Paragraph 14.07, or has accepted defective Work pursuant to Paragraph 14.04;
 - h. the Contract Price has been reduced by Change Orders;
 - i. an event that would constitute a default by Contractor and therefore justify a termination for cause has occurred;
 - j. liquidated damages have accrued as a result of Contractor's failure to achieve Milestones, Substantial Completion, or final completion of the Work;
 - k. Liens have been filed in connection with the Work, except where Contractor has delivered a specific bond satisfactory to Owner to secure the satisfaction and discharge of such Liens;
 - l. there are other items entitling Owner to a set off against the amount recommended.
 - 2. If Owner imposes any set-off against payment, whether based on its own knowledge or on the written recommendations of Engineer, Owner will give Contractor immediate written notice (with a copy to Engineer) stating the reasons for such action and the specific amount of the reduction, and promptly pay Contractor any amount

remaining after deduction of the amount so withheld. Owner shall promptly pay Contractor the amount so withheld, or any adjustment thereto agreed to by Owner and Contractor, if Contractor remedies the reasons for such action. The reduction imposed shall be binding on Contractor unless it duly submits a Change Proposal contesting the reduction.

3. Upon a subsequent determination that Owner's refusal of payment was not justified, the amount wrongfully withheld shall be treated as an amount due as determined by Paragraph 15.01.C.1 and subject to interest as provided in the Agreement.

15.02 *Contractor's Warranty of Title*

- A. Contractor warrants and guarantees that title to all Work, materials, and equipment furnished under the Contract will pass to Owner free and clear of (1) all Liens and other title defects, and (2) all patent, licensing, copyright, or royalty obligations, no later than seven days after the time of payment by Owner.

15.03 *Substantial Completion*

- A. When Contractor considers the entire Work ready for its intended use Contractor shall notify Owner and Engineer in writing that the entire Work is substantially complete and request that Engineer issue a certificate of Substantial Completion. Contractor shall at the same time submit to Owner and Engineer an initial draft of punch list items to be completed or corrected before final payment.
- B. Promptly after Contractor's notification, Owner, Contractor, and Engineer shall make an inspection of the Work to determine the status of completion. If Engineer does not consider the Work substantially complete, Engineer will notify Contractor in writing giving the reasons therefor.
- C. If Engineer considers the Work substantially complete, Engineer will deliver to Owner a preliminary certificate of Substantial Completion which shall fix the date of Substantial Completion. Engineer shall attach to the certificate a punch list of items to be completed or corrected before final payment. Owner shall have seven days after receipt of the preliminary certificate during which to make written objection to Engineer as to any provisions of the certificate or attached punch list. If, after considering the objections to the provisions of the preliminary certificate, Engineer concludes that the Work is not substantially complete, Engineer will, within 14 days after submission of the preliminary certificate to Owner, notify Contractor in writing that the Work is not substantially complete, stating the reasons therefor. If Owner does not object to the provisions of the certificate, or if despite consideration of Owner's objections Engineer concludes that the Work is substantially complete, then Engineer will, within said 14 days, execute and deliver to Owner and Contractor a final certificate of Substantial Completion (with a revised punch list of items to be completed or corrected) reflecting such changes from the preliminary certificate as Engineer believes justified after consideration of any objections from Owner.
- D. At the time of receipt of the preliminary certificate of Substantial Completion, Owner and Contractor will confer regarding Owner's use or occupancy of the Work following Substantial Completion, review the builder's risk insurance policy with respect to the end of the builder's risk coverage, and confirm the transition to coverage of the Work under a permanent property insurance policy held by Owner. Unless Owner and Contractor agree otherwise in writing, Owner shall bear responsibility for security, operation, protection of the Work, property insurance, maintenance, heat, and utilities upon Owner's use or occupancy of the Work.

- E. After Substantial Completion the Contractor shall promptly begin work on the punch list of items to be completed or corrected prior to final payment. In appropriate cases Contractor may submit monthly Applications for Payment for completed punch list items, following the progress payment procedures set forth above.
- F. Owner shall have the right to exclude Contractor from the Site after the date of Substantial Completion subject to allowing Contractor reasonable access to remove its property and complete or correct items on the punch list.

15.04 *Partial Use or Occupancy*

- A. Prior to Substantial Completion of all the Work, Owner may use or occupy any substantially completed part of the Work which has specifically been identified in the Contract Documents, or which Owner, Engineer, and Contractor agree constitutes a separately functioning and usable part of the Work that can be used by Owner for its intended purpose without significant interference with Contractor's performance of the remainder of the Work, subject to the following conditions:
 - 1. At any time Owner may request in writing that Contractor permit Owner to use or occupy any such part of the Work that Owner believes to be substantially complete. If and when Contractor agrees that such part of the Work is substantially complete, Contractor, Owner, and Engineer will follow the procedures of Paragraph 15.03.A through E for that part of the Work.
 - 2. At any time Contractor may notify Owner and Engineer in writing that Contractor considers any such part of the Work substantially complete and request Engineer to issue a certificate of Substantial Completion for that part of the Work.
 - 3. Within a reasonable time after either such request, Owner, Contractor, and Engineer shall make an inspection of that part of the Work to determine its status of completion. If Engineer does not consider that part of the Work to be substantially complete, Engineer will notify Owner and Contractor in writing giving the reasons therefor. If Engineer considers that part of the Work to be substantially complete, the provisions of Paragraph 15.03 will apply with respect to certification of Substantial Completion of that part of the Work and the division of responsibility in respect thereof and access thereto.
 - 4. No use or occupancy or separate operation of part of the Work may occur prior to compliance with the requirements of Paragraph 6.05 regarding builder's risk or other property insurance.

15.05 *Final Inspection*

- A. Upon written notice from Contractor that the entire Work or an agreed portion thereof is complete, Engineer will promptly make a final inspection with Owner and Contractor and will notify Contractor in writing of all particulars in which this inspection reveals that the Work, or agreed portion thereof, is incomplete or defective. Contractor shall immediately take such measures as are necessary to complete such Work or remedy such deficiencies.

15.06 *Final Payment*

- A. *Application for Payment:*
 - 1. After Contractor has, in the opinion of Engineer, satisfactorily completed all corrections identified during the final inspection and has delivered, in accordance with the Contract Documents, all maintenance and operating instructions, schedules, guarantees, bonds, certificates or other evidence of insurance, certificates of

inspection, annotated record documents (as provided in Paragraph 7.11), and other documents, Contractor may make application for final payment.

2. The final Application for Payment shall be accompanied (except as previously delivered) by:
 - a. all documentation called for in the Contract Documents;
 - b. consent of the surety, if any, to final payment;
 - c. satisfactory evidence that all title issues have been resolved such that title to all Work, materials, and equipment has passed to Owner free and clear of any Liens or other title defects, or will so pass upon final payment.
 - d. a list of all disputes that Contractor believes are unsettled; and
 - e. complete and legally effective releases or waivers (satisfactory to Owner) of all Lien rights arising out of the Work, and of Liens filed in connection with the Work.
3. In lieu of the releases or waivers of Liens specified in Paragraph 15.06.A.2 and as approved by Owner, Contractor may furnish receipts or releases in full and an affidavit of Contractor that: (a) the releases and receipts include all labor, services, material, and equipment for which a Lien could be filed; and (b) all payrolls, material and equipment bills, and other indebtedness connected with the Work for which Owner might in any way be responsible, or which might in any way result in liens or other burdens on Owner's property, have been paid or otherwise satisfied. If any Subcontractor or Supplier fails to furnish such a release or receipt in full, Contractor may furnish a bond or other collateral satisfactory to Owner to indemnify Owner against any Lien, or Owner at its option may issue joint checks payable to Contractor and specified Subcontractors and Suppliers.

B. *Engineer's Review of Application and Acceptance:*

1. If, on the basis of Engineer's observation of the Work during construction and final inspection, and Engineer's review of the final Application for Payment and accompanying documentation as required by the Contract Documents, Engineer is satisfied that the Work has been completed and Contractor's other obligations under the Contract have been fulfilled, Engineer will, within ten days after receipt of the final Application for Payment, indicate in writing Engineer's recommendation of final payment and present the Application for Payment to Owner for payment. Such recommendation shall account for any set-offs against payment that are necessary in Engineer's opinion to protect Owner from loss for the reasons stated above with respect to progress payments. At the same time Engineer will also give written notice to Owner and Contractor that the Work is acceptable, subject to the provisions of Paragraph 15.07. Otherwise, Engineer will return the Application for Payment to Contractor, indicating in writing the reasons for refusing to recommend final payment, in which case Contractor shall make the necessary corrections and resubmit the Application for Payment.

C. *Completion of Work:* The Work is complete (subject to surviving obligations) when it is ready for final payment as established by the Engineer's written recommendation of final payment.

D. *Payment Becomes Due:* Thirty days after the presentation to Owner of the final Application for Payment and accompanying documentation, the amount recommended by Engineer (less any further sum Owner is entitled to set off against Engineer's recommendation,

including but not limited to set-offs for liquidated damages and set-offs allowed under the provisions above with respect to progress payments) will become due and shall be paid by Owner to Contractor.

15.07 *Waiver of Claims*

- A. The making of final payment will not constitute a waiver by Owner of claims or rights against Contractor. Owner expressly reserves claims and rights arising from unsettled Liens, from defective Work appearing after final inspection pursuant to Paragraph 15.05, from Contractor's failure to comply with the Contract Documents or the terms of any special guarantees specified therein, from outstanding Claims by Owner, or from Contractor's continuing obligations under the Contract Documents.
- B. The acceptance of final payment by Contractor will constitute a waiver by Contractor of all claims and rights against Owner other than those pending matters that have been duly submitted or appealed under the provisions of Article 17.

15.08 *Correction Period*

- A. If within one year after the date of Substantial Completion (or such longer period of time as may be prescribed by the terms of any applicable special guarantee required by the Contract Documents, or by any specific provision of the Contract Documents), any Work is found to be defective, or if the repair of any damages to the Site, adjacent areas that Contractor has arranged to use through construction easements or otherwise, and other adjacent areas used by Contractor as permitted by Laws and Regulations, is found to be defective, then Contractor shall promptly, without cost to Owner and in accordance with Owner's written instructions:
 - 1. correct the defective repairs to the Site or such other adjacent areas;
 - 2. correct such defective Work;
 - 3. if the defective Work has been rejected by Owner, remove it from the Project and replace it with Work that is not defective, and
 - 4. satisfactorily correct or repair or remove and replace any damage to other Work, to the work of others, or to other land or areas resulting therefrom.
- B. If Contractor does not promptly comply with the terms of Owner's written instructions, or in an emergency where delay would cause serious risk of loss or damage, Owner may have the defective Work corrected or repaired or may have the rejected Work removed and replaced. Contractor shall pay all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to such correction or repair or such removal and replacement (including but not limited to all costs of repair or replacement of work of others).
- C. In special circumstances where a particular item of equipment is placed in continuous service before Substantial Completion of all the Work, the correction period for that item may start to run from an earlier date if so provided in the Specifications.
- D. Where defective Work (and damage to other Work resulting therefrom) has been corrected or removed and replaced under this paragraph, the correction period hereunder with respect to such Work will be extended for an additional period of one year after such correction or removal and replacement has been satisfactorily completed.

- E. Contractor's obligations under this paragraph are in addition to all other obligations and warranties. The provisions of this paragraph shall not be construed as a substitute for, or a waiver of, the provisions of any applicable statute of limitation or repose.

ARTICLE 16 – SUSPENSION OF WORK AND TERMINATION

16.01 *Owner May Suspend Work*

- A. At any time and without cause, Owner may suspend the Work or any portion thereof for a period of not more than 90 consecutive days by written notice to Contractor and Engineer. Such notice will fix the date on which Work will be resumed. Contractor shall resume the Work on the date so fixed. Contractor shall be entitled to an adjustment in the Contract Price or an extension of the Contract Times, or both, directly attributable to any such suspension. Any Change Proposal seeking such adjustments shall be submitted no later than 30 days after the date fixed for resumption of Work.

16.02 *Owner May Terminate for Cause*

- A. The occurrence of any one or more of the following events will constitute a default by Contractor and justify termination for cause:
 - 1. Contractor's persistent failure to perform the Work in accordance with the Contract Documents (including, but not limited to, failure to supply sufficient skilled workers or suitable materials or equipment or failure to adhere to the Progress Schedule);
 - 2. Failure of Contractor to perform or otherwise to comply with a material term of the Contract Documents;
 - 3. Contractor's disregard of Laws or Regulations of any public body having jurisdiction; or
 - 4. Contractor's repeated disregard of the authority of Owner or Engineer.
- B. If one or more of the events identified in Paragraph 16.02.A occurs, then after giving Contractor (and any surety) ten days written notice that Owner is considering a declaration that Contractor is in default and termination of the contract, Owner may proceed to:
 - 1. declare Contractor to be in default, and give Contractor (and any surety) notice that the Contract is terminated; and
 - 2. enforce the rights available to Owner under any applicable performance bond.
- C. Subject to the terms and operation of any applicable performance bond, if Owner has terminated the Contract for cause, Owner may exclude Contractor from the Site, take possession of the Work, incorporate in the Work all materials and equipment stored at the Site or for which Owner has paid Contractor but which are stored elsewhere, and complete the Work as Owner may deem expedient.
- D. Owner may not proceed with termination of the Contract under Paragraph 16.02.B if Contractor within seven days of receipt of notice of intent to terminate begins to correct its failure to perform and proceeds diligently to cure such failure.
- E. If Owner proceeds as provided in Paragraph 16.02.B, Contractor shall not be entitled to receive any further payment until the Work is completed. If the unpaid balance of the Contract Price exceeds the cost to complete the Work, including all related claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals) sustained by Owner, such excess will be paid to Contractor. If the cost to complete the Work including such related claims, costs, losses,

and damages exceeds such unpaid balance, Contractor shall pay the difference to Owner. Such claims, costs, losses, and damages incurred by Owner will be reviewed by Engineer as to their reasonableness and, when so approved by Engineer, incorporated in a Change Order. When exercising any rights or remedies under this paragraph, Owner shall not be required to obtain the lowest price for the Work performed.

- F. Where Contractor's services have been so terminated by Owner, the termination will not affect any rights or remedies of Owner against Contractor then existing or which may thereafter accrue, or any rights or remedies of Owner against Contractor or any surety under any payment bond or performance bond. Any retention or payment of money due Contractor by Owner will not release Contractor from liability.
- G. If and to the extent that Contractor has provided a performance bond under the provisions of Paragraph 6.01.A, the provisions of that bond shall govern over any inconsistent provisions of Paragraphs 16.02.B and 16.02.D.

16.03 *Owner May Terminate For Convenience*

- A. Upon seven days written notice to Contractor and Engineer, Owner may, without cause and without prejudice to any other right or remedy of Owner, terminate the Contract. In such case, Contractor shall be paid for (without duplication of any items):
 - 1. completed and acceptable Work executed in accordance with the Contract Documents prior to the effective date of termination, including fair and reasonable sums for overhead and profit on such Work;
 - 2. expenses sustained prior to the effective date of termination in performing services and furnishing labor, materials, or equipment as required by the Contract Documents in connection with uncompleted Work, plus fair and reasonable sums for overhead and profit on such expenses; and
 - 3. other reasonable expenses directly attributable to termination, including costs incurred to prepare a termination for convenience cost proposal.
- B. Contractor shall not be paid on account of loss of anticipated overhead, profits, or revenue, or other economic loss arising out of or resulting from such termination.

16.04 *Contractor May Stop Work or Terminate*

- A. If, through no act or fault of Contractor, (1) the Work is suspended for more than 90 consecutive days by Owner or under an order of court or other public authority, or (2) Engineer fails to act on any Application for Payment within 30 days after it is submitted, or (3) Owner fails for 30 days to pay Contractor any sum finally determined to be due, then Contractor may, upon seven days written notice to Owner and Engineer, and provided Owner or Engineer do not remedy such suspension or failure within that time, terminate the contract and recover from Owner payment on the same terms as provided in Paragraph 16.03.
- B. In lieu of terminating the Contract and without prejudice to any other right or remedy, if Engineer has failed to act on an Application for Payment within 30 days after it is submitted, or Owner has failed for 30 days to pay Contractor any sum finally determined to be due, Contractor may, seven days after written notice to Owner and Engineer, stop the Work until payment is made of all such amounts due Contractor, including interest thereon. The provisions of this paragraph are not intended to preclude Contractor from submitting a Change Proposal for an adjustment in Contract Price or Contract Times or otherwise for

expenses or damage directly attributable to Contractor's stopping the Work as permitted by this paragraph.

ARTICLE 17 – FINAL RESOLUTION OF DISPUTES

17.01 Methods and Procedures

- A. *Disputes Subject to Final Resolution:* The following disputed matters are subject to final resolution under the provisions of this Article:
1. A timely appeal of an approval in part and denial in part of a Claim, or of a denial in full; and
 2. Disputes between Owner and Contractor concerning the Work or obligations under the Contract Documents, and arising after final payment has been made.
- B. *Final Resolution of Disputes:* For any dispute subject to resolution under this Article, Owner or Contractor may:
1. elect in writing to invoke the dispute resolution process provided for in the Supplementary Conditions; or
 2. agree with the other party to submit the dispute to another dispute resolution process; or
 3. if no dispute resolution process is provided for in the Supplementary Conditions or mutually agreed to, give written notice to the other party of the intent to submit the dispute to a court of competent jurisdiction.

ARTICLE 18 – MISCELLANEOUS

18.01 Giving Notice

- A. Whenever any provision of the Contract Documents requires the giving of written notice, it will be deemed to have been validly given if:
1. delivered in person, by a commercial courier service or otherwise, to the individual or to a member of the firm or to an officer of the corporation for which it is intended; or
 2. delivered at or sent by registered or certified mail, postage prepaid, to the last business address known to the sender of the notice.

18.02 Computation of Times

- A. When any period of time is referred to in the Contract by days, it will be computed to exclude the first and include the last day of such period. If the last day of any such period falls on a Saturday or Sunday or on a day made a legal holiday by the law of the applicable jurisdiction, such day will be omitted from the computation.

18.03 Cumulative Remedies

- A. The duties and obligations imposed by these General Conditions and the rights and remedies available hereunder to the parties hereto are in addition to, and are not to be construed in any way as a limitation of, any rights and remedies available to any or all of them which are otherwise imposed or available by Laws or Regulations, by special warranty or guarantee, or by other provisions of the Contract. The provisions of this paragraph will be as effective as if repeated specifically in the Contract Documents in connection with each particular duty, obligation, right, and remedy to which they apply.

18.04 *Limitation of Damages*

- A. With respect to any and all Change Proposals, Claims, disputes subject to final resolution, and other matters at issue, neither Owner nor Engineer, nor any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors, shall be liable to Contractor for any claims, costs, losses, or damages sustained by Contractor on or in connection with any other project or anticipated project.

18.05 *No Waiver*

- A. A party's non-enforcement of any provision shall not constitute a waiver of that provision, nor shall it affect the enforceability of that provision or of the remainder of this Contract.

18.06 *Survival of Obligations*

- A. All representations, indemnifications, warranties, and guarantees made in, required by, or given in accordance with the Contract, as well as all continuing obligations indicated in the Contract, will survive final payment, completion, and acceptance of the Work or termination or completion of the Contract or termination of the services of Contractor.

18.07 *Controlling Law*

- A. This Contract is to be governed by the law of the state in which the Project is located.

18.08 *Headings*

- A. Article and paragraph headings are inserted for convenience only and do not constitute parts of these General Conditions.

00800
SUPPLEMENTARY CONDITIONS

These Supplementary Conditions amend or supplement the Standard General Conditions of the Construction Contract, EJCDC C-700 (2013 Edition) and other provisions of the Contract Documents as indicated below. All provisions which are not so amended or supplemented remain in full force and effect. The General Conditions may also be supplemented elsewhere in the Contract Documents.

The terms used in these Supplementary Conditions which are defined in the Standard General Conditions of the Construction Contract, EJCDC C-700 (2013 Edition) have the meanings assigned to them in the General Conditions.

PART 1 - MODIFICATIONS AND SUPPLEMENTS TO GENERAL CONDITIONS

SC-2.01 Delivery of Bonds and Evidence of Insurance

Delete paragraph 2.01 C. of the General Conditions in its entirety and insert the following in its place:

C. This subsection is not needed.

SC-3.03 Reporting and Resolving Discrepancies

Delete the paragraph 3.03 A.3 in its entirety and insert the following in its place:

3. Contractor shall not be liable to Owner or Engineer for failure to report any conflict, error, ambiguity, or discrepancy in the Contract Documents unless Contractor had actual knowledge thereof or unless Contractor reasonably should have known of such conflict, error, ambiguity or discrepancy.

SC-4.01 Commencement of Contract Time; Notice to Proceed

Delete the last sentence of paragraph 4.01 A. of the General Conditions and insert the following in its place:

In no event will the Contract Time commence to run later than the 120th day after the day of the Bid opening or the thirtieth day after the Effective Date of the Agreement, whichever date is earlier, unless agreed otherwise by Owner and Contractor in writing.

SC-5.03 Subsurface and Physical Conditions

Delete paragraphs 5.03 A. and 5.03 B. in of the General Conditions in their entirety and insert the following in their place:

5.03 Subsurface and Physical Conditions

A. Reports and Drawings: Division 1: General Requirements of the Specifications shall identify those reports known to Owner of explorations and tests of subsurface conditions at or adjacent to the site and drawings known to Owner of physical conditions relating to existing surface or subsurface structures at the site that have been utilized by Engineer in preparation of the Contract Documents. Contractor may rely upon the accuracy of any Technical Data contained in such reports that is specifically referenced in Division 1: General Requirements as Technical Data that can be relied on by Contractor. Except as indicated above, Contractor shall have full responsibility with respect to subsurface and physical conditions at the site.

B. Contractor may rely on the technical data as set forth in subsection A above, but such reports and drawings are not Contract Documents. Except for such reliance on Technical Data, Contractor may

not rely upon or make any claim against Owner or Engineer, or any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors, with respect to:

1. The completeness of such reports and drawings for Contractor's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences, and procedures of construction to be employed by Contractor, and safety precautions and programs incident thereto; or
2. Other data, interpretations, opinions, and information contained in such reports or shown or indicated in such drawings; or
3. Any Contractor interpretation of or conclusion drawn from any Technical data or any such other data, interpretations, opinions, or information.

SC-5.06 Hazardous Environmental Conditions at Site

Delete paragraphs 5.06 A., 5.06 B. and 5.06 I. in of the General Conditions in their entirety and insert the following in their place:

- A. No reports or drawings related to Hazardous Environmental Conditions at the Site are known to Owner.
- B. This subsection is not needed.
- I. This subsection is not needed.

SC-6.01 Performance, Payment and Other Bonds

Add the following language at the end of Paragraph 6.01 A.:

In accordance with section 255.05(1), Fla. Stat., as amended from time to time, before commencing the Work or before recommencing the Work after a default or abandonment, the Contractor shall execute and record in the public records of Palm Beach County a payment and performance bond with a surety insurer authorized to do business in the State of Florida, and the Contractor shall be required to provide to the Owner a certified copy of the recorded bond. The Owner may not make a payment to the Contractor until the Contractor has complied with section 255.05(1)(b), Fla. Stat.

SC-6.02 Insurance – General Provisions

Add the following language at the end of Paragraph 6.02 C.:

Contractor shall deliver the required certificates of insurance prior to the commencement of any Work at the site. All of the policies of insurance (or the certificates or other evidence thereof) required to be purchased and maintained by Contractor shall be "claims made" and contain the name of the Project.

SC-6.03 Contractor's Insurance

Delete the following language in Paragraph 6.03 G.:

G. Additional insureds: The Contractor's commercial general liability, ~~automobile liability~~, umbrella or excess, and pollution liability policies shall include and list as additional insureds Owner and Engineer, and any individuals or entities identified in the Supplementary Conditions; include coverage for the respective officers, directors, members, partners, employees, agents, consultants, and subcontractors of each and any of all such additional insureds; and the insurance afforded to these additional insureds shall provide primary coverage for all claims covered thereby (including as applicable those arising from both ongoing and completed operations) on a non-contributory basis. Contractor shall obtain all necessary endorsements to support these requirements.

Add the following new paragraph immediately after Paragraph 6.03 J.:

K. The limits of liability for the insurance required by Paragraph 6.03 of the General Conditions shall provide coverage for not less than the following amounts or greater where required by Laws and Regulations:

1. Worker's Compensation, and related coverages under Paragraphs 6.03 A.1. and 6.03 A.2. of the General Conditions:

State: Statutory

Applicable Federal (e.g. Longshoreman's and Harbor Workers' Compensation, Maritime, Jones Act, etc.): Statutory

Employer's liability:

Bodily injury, each accident \$1,000,000

Bodily injury by disease, each employee \$1,000,000

Bodily injury/disease aggregate \$1,000,000

2. Contractor's Commercial General Liability under paragraphs 6.03 B. and 6.03 C. of the General Conditions:

General Aggregate \$3,000,000

Products and Completed Operations Aggregate \$3,000,000

Personal and Advertising Injury \$1,000,000

Each Occurrence (Bodily Injury and Property Damage) \$1,000,000

3. Automobile Liability under paragraph 6.03 D. of the General Conditions:

Combined Single Limit of \$1,000,000

4. Excess or Umbrella Liability under paragraph 6.03 E. of the General Conditions:

Per Occurrence \$If applicable

General Aggregate \$If applicable

SC-6.04 Owner's Liability Insurance

Delete paragraphs 6.04 A. and 6.04 B. of the General Conditions in their entirety and insert the following in their place:

A. This Subsection is not needed.

B. This subsection is not needed.

SC-6.05 Property Insurance

Add the following language at the end of paragraph 6.05 C.:

The maximum deductible amount for any insurance required under paragraph 6.05 shall be \$5,000.00.

SC-6.06 Waiver of Rights

Delete paragraphs 6.06 B. and 6.06 C. of the General Conditions in their entirety and insert the following in their place:

- B. This Subsection is not needed.
- C. This subsection is not needed.

SC-7.01 Supervision and Superintendence

Add the following language at the end of paragraph 7.01 B.:

The superintendent will be Contractor's representative at the site and shall have authority to act on behalf of Contractor. All communications given to the superintendent shall be as binding as if given to Contractor.

SC-7.07 Patent Fees and Royalties

Delete paragraph 7.07 B. and insert the following in its place:

- B. This subsection is not needed.

SC-7.08 Permits

Add the following language at the end of paragraph 7.08 A.:

Contractor shall obtain and pay for the following permits:

1. City of Lake Worth Building Permit. Include in the bid amount a 3-percent of appropriate items permit fee based on the bid cost. This permit fee amount will be adjusted based on the actual fee charged and the difference credited, as applicable.
2. Any other applicable permits.

SC-7.18 Indemnification

Delete paragraph 7.18 A. and insert the following in its place:

- A. Contractor shall indemnify and hold harmless Owner and Engineer and their respective officers and employees from liabilities, damages, losses, and costs, including, but not limited to, reasonable attorney's fees, to the extent caused by the negligence, recklessness, or intentional wrongful misconduct of the Contractor and persons employed or utilized by the Contractor in the performance of the Contract Documents. Compliance with any insurance requirements required elsewhere in the Contract Documents shall not relieve Contractor of its liability and obligation to hold harmless and indemnify the City as set forth in this section. It is the specific intent of the parties hereto that the foregoing indemnification complies with section 725.06, Florida Statutes. It is further the specific intent and agreement of the parties that all of the Contract Documents on this Project are hereby amended to include the foregoing indemnification and the required "Specific Consideration" therefore. Nothing contained in the Contract Documents shall be construed or interpreted as consent by the City to be sued, nor shall the Contract Documents be construed as a waiver of sovereign immunity beyond the waiver provided in section 768.28, Fla. Stat., as amended from time to time.

SC-10.03 Project Representative

Add the following new paragraph immediately after paragraph 10.03 A.:

- B. On this Project, by agreement with the Owner, Engineer will not furnish a Resident Project Representative to represent Engineer at the Site or assist Engineer in observing the progress and quality of the Work. However, if the Engineer does furnish a Resident Project Representative per

paragraph 10.03 of the General Conditions, the duties, etc. of the representative shall be as provided in the Listing of the Duties, Responsibilities and Limitations of Authority of the Resident Project Representative as included in the Project Manual. If Owner designates another representative or agent to represent Owner at the Site who is not Engineer's consultant, agent, or employee, the responsibilities and authority and limitations thereon of such other individual or entity shall be presented at the Preconstruction Conference or as otherwise set forth in the Project Manual.

SC-10.04 Rejecting Defective Work

Add the following language at the end of paragraph 10.04 A.:

- A. Engineer also has the authority to disapprove or reject Work which Engineer believes will not produce a completed Project that conforms to the Contract documents or that will prejudice the integrity of the design concept of the completed Project as a functioning whole as indicated by the Contract Documents.

SC-11.04 Change of Contract Price

Delete paragraphs 11.04 C.2.c. and 11.04 C.2.e. in their entirety and insert the following in their place:

- c. where one or more tiers of subcontracts are on the basis of Cost of the Work plus a fee and no fixed fee is agreed upon, the maximum allowable to Contractor on account of overhead and profit of all Subcontractors shall be fifteen percent;
- e. the amount of credit to be allowed by Contractor to Owner for any change which results in a net decrease in cost will be the amount of the actual net decrease in cost plus a deduction in Contractor's fee by an amount equal to ten percent of such net decrease; and

SC-13.03 Unit Price Work

Delete paragraph 13.03 E. in its entirety and insert the following in its place:

- E. Contractor may not make a claim for additional expenses incurred as a result of a difference between final quantity of any item(s) of Unit Price Work and the estimated quantity of such item(s) in the Contract Documents, unless specifically allowed in the Bid Form. Any adjustments specifically allowed shall be made in accordance with directions in the Bid Form.

SC-16.03 Owner May Terminate for Convenience

Add the following new paragraph immediately after paragraph 16.03 B.:

- C. If a court of competent jurisdiction finds that the Owner wrongfully terminated this Contract, then in such event, this Contract shall be deemed terminated for convenience as provided for in this paragraph, and the Contractor shall not be entitled to loss of anticipated overhead, profits, or revenue, or other economic loss arising out of or resulting from such termination but may be entitled to all items as authorized herein.

SC-18.07 Controlling Law

Delete paragraph 18.07 A. in its entirety and insert the following in its place:

- A. This Contract is to be governed by the laws of the State of Florida. The venue for any and all legal action necessary to enforce the Contract Documents will be in Palm Beach County, Florida.

PART 2 - ADDITIONAL SUPPLEMENTARY CONDITIONS

1. ATTACHMENTS:

The following forms included in the Project Manual shall be used by Contractor for submittals required by the Contract Documents (unless Owner accepts other form):

- a. Construction Performance Bond (00610).
- b. Construction Payment Bond (00620).
- c. Notice of Compliance with Chapter 556, Florida Statutes (00630).
- d. Contractor's Affidavit to Owner (00670).
- e. Form of Application for Payment (00680).

END OF SECTION

00820
SPECIAL CONDITIONS

CITY OF LAKE WORTH PURCHASING DEPARTMENT REQUIREMENTS

SPC-1 APPROVAL OF ACCOUNTING SYSTEM

Except with respect to firm fixed-price contracts, no contract type shall be used unless the Purchasing Manager has determined in writing that:

- 1) The proposed contractor's accounting system will permit timely development of all necessary cost data in the form required by the specific contract type contemplated; and
- 2) The proposed contractor's accounting system is adequate to allocate costs in accordance with generally accepted cost accounting principles.

SPC-2 RIGHT TO INSPECT PLANT

The City may, at reasonable times, inspect any part of the plant, place of business, or work site of a contractor or subcontractor which is pertinent to the performance of any contract awarded or to be awarded by the City.

SPC-3 RIGHT TO AUDIT RECORDS

- 1) **Audit of Cost or Pricing Data:** The City may, at reasonable times and places audit the books, documents, papers and records of any contractor who has submitted cost or pricing data to the extent that such books, documents, papers and records are pertinent to such cost or pricing data. Any person who receives a contract, change order or contract modifications for which cost or pricing data is required, shall maintain such books, documents, papers and records that pertinent to such costs or pricing data for five (5) years from the date of the final payment under the contract.
- 2) **Contract Audit:** The City shall be entitled to audit the books, documents, papers and records of a contractor or a subcontractor at any tier under any negotiated contract or subcontract other than a firm fixed-price contract to the extent that such books, documents, papers and records are pertinent to the performance of such contract or subcontract. Such books, documents, papers and records shall be maintained by the contractor for a period of five (5) years from the date of final payment under the prime contract and by the subcontractor for a period of five (5) years from the date of final payment under the subcontract.
- 3) **Contractor Records:** If a contract is being funded in whole or in part by assistance from a federal agency, then the contract shall include provisions:
 - A) Requiring the contractor and subcontractor at any tier to maintain for five (5) years from the date of final payment under the contract all books, documents, papers and records pertinent to the contract; and

- B) Requiring the contractor and subcontractor at any tier to provide to the City, the federal grantor agency, the Comptroller General of the United States, or any of their duly authorized representatives access to such books, documents, papers and records for the purposes of examining, Auditing and copying them.

SPC-4 LOCAL VENDOR PREFERENCE

A local vendor preference shall be used in accordance with section 2-117(b) of the City of Lake Worth Code of Ordinances. In the event the lowest responsive, responsible bidder or the highest ranked responsive, responsible proposer in the procurement of goods, services or construction is a non-LOCAL business, then all bids and or proposals from responsive, responsible LOCAL businesses to the same solicitation shall be adjusted by five (5) percent, solely for the purpose of determining bid/contract award. The bid price of LOCAL bidders will be adjusted downward by five (5) percent for purposes of ranking of bidders.

In no event, shall the application of this adjustment to a responsive quote or bid change the actual bid amount. Further, it will not cause the City to pay more than \$15,000 above the amount bid by that non-local vendor, which would have been recommended for award if the local vendor preference had not been applied.

If the application of the five-percent local vendor preference causes the *evaluated local vendor price* to be less than the actual low-bid price, but the actual bid price of the local vendor is more than \$15,000 higher than the actual low-bid price of a non-local vendor, then the non-local vendor submitting the actual low-bid, shall be viewed as the low-bidder, and be recommended for award, unless for reasons other than price, the bid is not found to be responsive and/or responsible.

The determination as to whether a bidder or proposer is a local or non-local business shall be made by the Purchasing Division, after confirming the vendor has a valid business tax receipt and certificate of occupancy, as reflected within the Business Master File of the city's ERP system. The bidder or proposer does not have to be a current vendor to the City (City as a customer) at the time of bidding/proposing, but must have been issued a business tax receipt applicable to the goods/services/ construction being requested, PRIOR to the due date/time for bids/proposals. Prior to making an award through the application of the local vendor preference, city staff may require a bidder or proposer to provide additional information at any time prior to the award.

A *LOCAL business*, for the purposes of the application of a local vendor preference, means a bidder or proposer which has a permanent, physical place of business within the city limits, and a valid business tax receipt applicable to the required goods, services, or construction items being procured. Post office boxes or locations at a postal service center are not verifiable and shall not be used for the purpose of establishing said physical address. If the business is a joint venture/partnership, it is sufficient for qualification as a LOCAL business if at least one party of the joint venture/partnership meets the test set forth in this Section.

Non-LOCAL business means a bidder or proposer which is not a LOCAL business as defined herein.

Permanent place of business means headquarters which are located within the city limits or a permanent office or other site located within the city limits from which a bidder or proposer will produce a substantial portion of the goods or perform a substantial portion of the services to be purchased. A post office box or location at a postal service center shall not constitute a permanent place of business.

SPC-5 CONTRACTOR'S START OF WORK & CHANGE OF SCOPE

- 1) The Contractor shall not perform work without a Purchase Order.
- 2) The Contractor shall not work out of scope without a signed, issued work directive change or change order to the purchase order, authorizing the additional work and any change to the period of performance (Construction Contract Time).

SPC-6 APPROPRIATION OF FUNDS

This project is subject to approval and appropriation of funds by the City of Lake Worth Commission.

SPC-7 BUILDING PERMIT FEE

A building permit fee equal to 3-percent of the appropriate items of accepted bid shall be included in the project costs. See Supplemental Conditions paragraph SC-7.08 for further details.

SPC-8 CONE OF SILENCE

Communications shall be in accordance with the City of Lake Worth Municipal Code, Article XIV Purchasing, Section 2-112(k) Cone of Silence.

00840
LISTING OF THE DUTIES, RESPONSIBILITIES AND
LIMITATIONS OF AUTHORITY OF THE
RESIDENT PROJECT REPRESENTATIVE

ENGINEER may furnish a Resident Project Representative (RPR), assistants and other field staff to assist ENGINEER in observing performance of the Work of the Contractor. RPR may only be part time on site, and CONTRACTOR shall coordinate with RPR as required in the Contract Documents.

Through on-site observations of the Work in progress and field checks of materials and equipment by the RPR and assistants, ENGINEER shall endeavor to provide further protection for OWNER against defects and deficiencies in the Work; but, the furnishing of such services will not make ENGINEER responsible for or give ENGINEER control over construction means, methods, techniques, sequences or procedures or for safety precautions or programs, or responsibility for CONTRACTOR's failure to perform the Work in accordance with the Contract Documents.

The duties and responsibilities of the RPR are limited to those of ENGINEER in ENGINEER's agreement with the OWNER and in the construction Contract Documents, and are further limited and described as follows:

A. GENERAL

RPR is ENGINEER's agent at the site, will act as directed by and under the supervision of ENGINEER, and will confer with ENGINEER regarding RPR's actions. RPR's dealings in matters pertaining to the on-site work shall in general be with ENGINEER and CONTRACTOR keeping OWNER advised as necessary. RPR's dealings with subcontractors shall only be through or with the full knowledge and approval of CONTRACTOR. RPR shall generally communicate with OWNER with the knowledge of and under the direction of ENGINEER.

B. DUTIES AND RESPONSIBILITIES OF RPR

1. SCHEDULES: Review the progress schedule, schedule of Shop Drawing submittals and schedule of values prepared by CONTRACTOR and consult with ENGINEER concerning acceptability.
2. CONFERENCES AND MEETINGS: Attend meetings with CONTRACTOR, such as preconstruction conferences, progress meetings, job conferences and other project-related meetings, and prepare and circulate copies of minutes thereof.
3. LIAISON:
 - a. Serve as ENGINEER's liaison with CONTRACTOR, working principally through CONTRACTOR's superintendent and assist in understanding the intent of the Contract Documents; and assist ENGINEER in serving as OWNER's liaison with CONTRACTOR when CONTRACTOR's operations affect OWNER's on-site operations.
 - b. Assist in obtaining from OWNER additional details or information, when required for proper execution of the Work.
4. SHOP DRAWINGS AND SAMPLES:
 - a. Record date of receipt of Shop Drawings and samples.
 - b. Receive samples which are furnished at the site by CONTRACTOR, and notify ENGINEER of availability of samples for examination.

- c. Advise ENGINEER and CONTRACTOR of the commencement of any Work requiring a Shop Drawing or sample if the submittal has not been approved by ENGINEER.
5. REVIEW OF WORK, REJECTION OF DEFECTIVE WORK, INSPECTIONS AND TESTS:
 - a. Conduct on-site observations of the Work in progress to assist ENGINEER in determining if the Work is in general proceeding in accordance with the Contract Documents.
 - b. Report to ENGINEER whenever RPR believes that any Work is unsatisfactory, faulty or defective or does not conform to the Contract Documents, or has been damaged, or does not meet the requirements of any inspection, test or approval required to be made; and advise ENGINEER of Work that RPR believes should be corrected or rejected or should be uncovered for observation, or requires special testing, inspection or approval.
 - c. Verify that tests, equipment and systems startups and operating and maintenance training are conducted in the presence of appropriate personnel, and that CONTRACTOR maintains adequate records thereof; and observe, record and report to ENGINEER appropriate details relative to the test procedures and startups.
 - d. Accompany visiting inspectors representing public or other agencies having jurisdiction over the Project, record the results of these inspections and report to ENGINEER.
6. INTERPRETATION OF CONTRACT DOCUMENTS: Report to ENGINEER when clarifications and interpretations of the Contract Documents are needed and transmit to CONTRACTOR clarifications and interpretations as issued by ENGINEER.
7. MODIFICATIONS: Consider and evaluate CONTRACTOR's suggestions for modifications in Drawings or Specifications and report with RPR's recommendations to ENGINEER. Transmit to CONTRACTOR decisions as issued by ENGINEER.
8. RECORDS:
 - a. Maintain at the job site or ENGINEER's office files for correspondence, reports of job conferences, Shop Drawings and samples, reproductions of original Contract Documents including all Work Directive Changes, Addenda, Change Orders, Field Orders, additional Drawings issued subsequent to the execution of the Contract, ENGINEER's clarifications and interpretations of the Contract Documents, progress reports, and other Project related documents.
 - b. Record names, addresses and telephone numbers of all CONTRACTORS, subcontractors and major suppliers of materials and equipment.
9. REPORTS:
 - a. Furnish ENGINEER periodic reports as required of progress of the Work and of CONTRACTOR's compliance with the progress schedule and schedule of Shop Drawing and sample submittals.
 - b. Consult with ENGINEER in advance of scheduled major tests, inspections or start of important phases of the Work.
 - c. Draft proposed Change Orders and Work Directive Changes, obtaining backup material from CONTRACTOR and recommend to ENGINEER Change Orders, Work Directive Changes, and Field Orders.
 - d. Report immediately to ENGINEER and OWNER upon the occurrence of any accident witnessed by RPR or that was otherwise made known to RPR.
10. PAYMENT REQUESTS: Review applications for payment with CONTRACTOR for compliance with the established procedure for their submission and forward with recommendations to

ENGINEER, noting particularly the relationship of the payment requested to the schedule of values, Work completed and materials and equipment delivered at the site but not incorporated in the Work.

11. CERTIFICATES, MAINTENANCE AND OPERATION MANUALS: During the course of the Work, verify that certificates, maintenance and operation manuals and other data required to be assembled and furnished by CONTRACTOR are applicable to the items actually installed and in accordance with the Contract Documents, and have this material delivered to ENGINEER for review and forwarding to OWNER prior to final payment for the Work.

12. COMPLETION:

- a. Before ENGINEER issues a Certificate of Substantial Completion, submit to CONTRACTOR a list of observed items requiring completion or correction.
- b. Conduct final inspection in the company of ENGINEER, OWNER and CONTRACTOR and prepare a final list of items to be completed or corrected.
- c. Observe that all items on final list have been completed or corrected and make recommendations to ENGINEER concerning acceptance.

C. LIMITATIONS OF AUTHORITY

Resident Project Representative:

1. Shall not authorize any deviation from the Contract Documents or substitution of materials or equipment, unless authorized by ENGINEER.
2. Shall not exceed limitations of ENGINEER's authority as set forth in the Contract Documents.
3. Shall not undertake any of the responsibilities of CONTRACTOR, subcontractors or CONTRACTOR's superintendent.
4. Shall not advise on, issue directions relative to or assume control over any aspect of the means, methods, techniques, sequences or procedures of construction unless such advice or directions are specifically required by the Contract Documents.
5. Shall not advise on, issue directions regarding or assume control over safety precautions and programs in connection with the Work.
6. Shall not accept Shop Drawing or sample submittals from anyone other than Contractor.
7. Shall not authorize OWNER to occupy the Project in whole or in part.
8. Shall not participate in specialized field or laboratory tests or inspections conducted by others except as specifically authorized by ENGINEER.

END OF SECTION

00860
LIST OF DRAWINGS

The Drawings which form a part of the Contract Documents and show the Work to be performed are as follows:

<u>Drawing Title</u>	<u>Drawing Number</u>	<u>No. of Sheets</u>	<u>Dated</u>
----------------------	---------------------------	--------------------------	--------------

**SPECIFICATIONS
TABLE OF CONTENTS**

SECTION NUMBER	TITLE	NO. OF PAGES
<u>DIVISION 1 - GENERAL REQUIREMENTS</u>		
01000	General Requirements	5
01010	Summary of Work (JLA Specifications)	2
01025	Measurement and Payment (JLA Specifications).....	4
01720	Record Documents	3
<u>DIVISION 2 - SITE WORK</u>		
02720	Well Construction Sequence (JLA Specifications).....	3
02725	Submittals (JLA Specifications)	6
02740	Well Drilling (JLA Specifications).....	5
02745	Well Casing (JLA Specifications)	3
02750	Well Screen and Gravel Pack (JLA Specifications)	3
02755	Annular Grout (JLA Specifications).....	3
02765	Borehole Geophysical Logging (JLA Specifications)	2
02770	Test Well Interval Sampling (JLA Specifications).....	4
02938	Sodding	2
FIGURE 1	Surficial Aquifer Test Well TW 17 for City of Lake Worth	
FIGURE 2	4-Inch Exploratory Test Well – Well Construction Detail	
FIGURE 3	2-Inch Monitor Well – Well Construction Detail	
FIGURE 4	2-Inch Monitor Well – Wellhead Detail	
FIGURE 5	Test Well TW-17 Location Drawing	

SECTION 01000

GENERAL REQUIREMENTS

1.0 PROJECT LOCATION

- A. 1900 2nd Avenue North, Lake Worth, FL

2.0 SCOPE OF WORK

- A. The Work to be performed by the Contractor includes permitting, inspecting, furnishing all materials, labor, tools, equipment, water, light, power, transportation, superintendence, temporary construction of every nature, and all other services and facilities of every nature whatsoever necessary to modify, construct, complete, deliver and place in operation the subject Project as shown on the Drawings and/or as herein described as specified. All Work to be in accordance with the Contract Documents.

3.0 REFERENCE POINTS

- A. Horizontal and vertical control have been provided in the Drawings. All construction staking to be provided by the Contractor.

4.0 GRADES, DIMENSIONS, AND ELEVATIONS

- A. Written dimensions have preference over scaled dimensions. All elevations are based on the 1929 National Geodetic Vertical Datum (N.G.V.D.).

5.0 EXISTING STRUCTURES AND UTILITIES

- A. All known utilities have been shown on the Drawings according to the best information available. It is the Contractor's responsibility to contact all owners of structures or utilities above ground, on the surface, or below the ground, within the Project area so that said owners may stake or otherwise mark or protect their facilities. The Contractor must provide facilities and be responsible for the protection of all structures, buildings and utilities, underground, on the surface, or above ground against trenching, dewatering, or any other activity connected with the Work throughout the entire Contract Time.
- B. When structures and utilities have been properly shown or marked and are disturbed or damaged in the execution of the Work, they must be repaired immediately in conformance with best standard practice and the approval of the owner of the damaged utility or structure. In the case of structures and utilities which have not been properly shown or located as outlined above and are disturbed or damaged in the prosecution of the Work, take whatever steps are necessary for safety and notify the affected utility owner and avoid any actions which might cause further damage to the structure or utility.
- C. Should the Work require repairs, changes or modifications of the Owner's utilities as well as other utilities, it is the responsibility of the Contractor to provide for the maintenance of continuous water, sewage, electric, telephone and other utility services to all present customers of such utilities, unless approval in writing is secured from the applicable utility company or Owner for interruption of such service.
- D. Contractor is responsible for verifying all vertical and horizontal locations of all existing utilities and structures, whether shown on the drawings or not, to verify any potential conflicts prior to ordering any materials.

6.0 QUALITY CONTROL

A. Testing Laboratory Services:

All tests and analyses and inspections, which are required in the Specifications and/or Drawings, are to be performed by a qualified independent testing laboratory and shall be at the Contractor's expense, unless otherwise specified. To qualify for acceptance, the Contractor shall demonstrate to the Engineer, based on evaluation of laboratory-submitted criteria conforming to ASTM E 699, that the independent testing laboratory has the experience and capability to conduct the required tests, analyses and inspections without delaying the progress of the Work. All tests, analyses and inspections performed by the independent testing laboratory shall be conducted under direct charge of a Registered Professional Engineer in the State of Florida. The Contractor shall be responsible for scheduling the independent testing laboratory's visit and for the coordination of the testing with the independent testing laboratory and Engineer.

B. Field Observations:

Provide twenty-four (24) hour notification to the Engineer for all specified field observations, unless otherwise noted.

7.0 MOBILIZATION

- A. Consists of the preparatory Work and operations in mobilizing for beginning Work on the Project, including, but not limited to, those operations necessary for the movement of personnel, equipment, supplies and incidentals to the Project site, and for the establishment of temporary offices, buildings, safety equipment and first aid supplies, sanitary and other facilities, as required by these Specifications, and State and local laws and regulations.

The costs of bonds, insurance and any other pre-construction expenses necessary for the start of the Work, excluding the cost of construction materials, is to be included in Mobilization.

- B. When the Bid Form includes a separate pay item for Mobilization, partial payments will be made in accordance with the following:

<u>Percent of Contract Price Less Mobilization Earned</u>	<u>Allowable Percent of the Lump Sum Price of Mobilization</u>
5	25
10	50
25	75
50	100

The standard retainage will be applied to these payments. Previous payments for Mobilization and unpaid amounts on Allowances will not be considered in calculating the percent of the Contract Price earned. Payments will be made in stepped increments as shown and will not be interpolated between steps.

- C. When the Bid Form does not include a separate item for Mobilization, all Work and incidental costs specified as being covered under Mobilization is to be included for payment under the several scheduled items on the Bid Form, and no separate payment will be made therefore.

8.0 MAINTENANCE OF TRAFFIC

- A. In the Contractor's use of streets and highways for the Work to be done under these Specifications, conform to all Municipal, County, State and Federal laws and regulations as applicable. Provide, erect and maintain effective barricades, warning lights, and signs on all intercepted streets or highways for protection of the Work and safety of the public. All barricades

or obstructions which encroach on or are adjacent to the public rights of way should be provided with lights which are illuminated at all times between sunset and sunrise.

- B. Contractor shall schedule Work to cause minimum disturbance of normal pedestrian and vehicular traffic and be responsible for providing suitable means of access to all public and private properties during all stages of the construction. Other than for an emergency safety condition, the Contractor must contact the Owner and Engineer for approval prior to completely blocking off any street to vehicular traffic during construction. Contractor shall provide written notification to emergency, police, fire and other appropriate agencies at least 24 hours in advance of new work or changed work.
- C. Maintain traffic in accordance with Section 102 of the Florida Department of Transportation Standard Specifications for Road and Bridge Construction, 2007 Edition, except as follows:
 - 1. Contractor is responsible for preparing a Maintenance of Traffic plan. Submit plan for Owner or roadway authority (City, County, D.O.T.) review.

The Maintenance of Traffic plan must be prepared by a person who is certified by an FDOT certified school or an engineer licensed in the State of Florida.
 - 2. When the Bid Form does not include a separate item for Maintenance of Traffic, the costs are to be included for payment under the several scheduled items on the Bid Form, and no separate payment will be made.

9.0 PLACING EQUIPMENT INTO SERVICE

- A. Do not operate or place into service or energize, electrical and mechanical equipment until approved by the Owner and Engineer. Such approval may be granted only after all interested parties have been duly notified, have given approval for placing the equipment into service, and all interested parties are present or waived their right to be present. Contractor shall provide, in writing, seventy-two (72) hour notification for all item and equipment start-ups.

10.0 SALVAGEABLE MATERIAL

- A. All salvageable material and/or equipment removed as a part of the Work for which specific use, relocation or other disposal is not specifically noted on the Drawings or otherwise specified, must be disposed of by the Contractor. All material and/or equipment not in salvageable condition as determined by the Engineer, must be disposed of by the Contractor. The actual storage site for salvageable material will be designated by the Owner.

11.0 BORING LOGS, OTHER REPORTS AND DRAWINGS UTILIZED BY ENGINEER

- A. Boring Logs, other reports and Drawings utilized by Engineer, if attached at the end of these Specifications, are provided for Contractor's information in accordance with paragraph 4. of the Instructions to Bidders and are not a part of the Contract Documents. There is no technical data in the Boring Logs, other reports or Drawings that should be relied on by the Contractor. There also were no other reports or drawings utilized by Engineer in preparation of the Contract Documents that contained data that could be relied on by the Contractor.

12.0 DISPOSAL OF EXCAVATED MATERIALS AND DEBRIS

- A. All excess excavated material and debris not required for backfill (unless otherwise noted), broken pipe, sidewalks, curbs and other concrete items, together with all roots, boards and other debris are to be disposed of by the Contractor at an appropriate legal site.

13.0 TEMPORARY CONTROLS AND FACILITIES

- A. The Contractor is responsible for compliance with all NPDES regulations including submitting a Pollution Prevention Plan, submitting a Notice of Intent, conducting maintenance and inspection of controls, erosion and sediment controls and submitting a Notice of Termination.
- B. As part of the Work, the Contractor shall be responsible for applying for, obtaining and complying with all required dewatering permits. Contractor shall notify South Florida Water Management District (SFWMD) prior to all dewatering activities. All dewatering shall meet SFWMD requirements.
- C. Contractor shall install all turbidity control devices required by SFWMD, if necessary. Contractor shall notify SFWMD for inspection of turbidity control devices prior to any construction activities.

14.0 CONSTRUCTION SCHEDULE MEETINGS

- A. Contractor shall submit a construction schedule in accordance with the General Conditions. Contractor's Project Manager and a representative of subcontractors performing work at the time of the meeting shall attend a coordination/progress meeting a minimum of once a month, as designated by the Owner, at the Owner's office during the progress of the Work. Contractor shall submit an updated construction schedule to the Engineer at each coordination/progress meeting.

15.0 MISCELLANEOUS

- A. All bolts, nuts, washers, etc. and miscellaneous hardware shall be 316 stainless steel, unless otherwise indicated.

16.0 CONTRACTOR'S SUBMITTALS

- A. Contractor shall be required to submit, with a letter of transmittal to the Engineer, a minimum of ten (10) copies of each checked and approved shop drawing, mix report, laboratory results, etc., where required in the specifications, Drawings or as appropriate, in lieu of the five (5) copies specified in Article 6 of the General Conditions or as specified elsewhere in these Specifications. Of the ten copies submitted, two copies will be returned to the Contractor for the Contractor's use. If the Contractor requires any additional approved copies, the Contractor shall submit additional copies at the time of initial submission. Allow a minimum of two weeks from date of receipt for review by the Engineer. Review of shop drawings will be general and will not relieve the Contractor from any responsibility.
- A. Contractor shall be required to submit, with a letter of transmittal to the Engineer, for review and approval, eight (8) hard copies and eight (8) copies in CD format of each Operation and Maintenance Manual for all equipment, regardless of the number of submittals specified elsewhere in these Specifications.

17.0 CONSTRUCTION SEQUENCE

- A. In addition to requirements of the Specifications and Drawings, the Contractor shall submit Construction Schedule and Project Phasing and Temporary Facilities Plan to Engineer which will include coordination of the various elements of the Work.

18.0 PROTECTION AND RESTORATION OF SURVEY MONUMENTS

- A. The Contractor shall be responsible for protecting and restoring all land and property corners, such as section corners, $\frac{1}{4}$ section corners, property corners or block control points, and for maintaining all horizontal and vertical control points. All surveying work shall be the responsibility of the Contractor and shall be performed under the supervision of a Florida

Professional Surveyor and Mapper. Survey points that will be destroyed during construction shall be properly referenced and replaced at the Contractor's expense with permanent monuments approved by the ENGINEER.

19.0 GENERAL ALLOWANCE

- A. General Allowance: The work to be paid under this item may cover unforeseen and unanticipated costs associated with the work. Use of the General Allowance requires written authorization by the Owner prior to performing any work under this item. Any unused portion of the General Allowance will be credited to the Owner at the time of final payment.
- B. Prior to final payment, an appropriate Change Order will be issued as recommended by Engineer to reflect actual amount due Contractor on account of Work covered by allowances or any credit due for unused allowance balances, and the Contract Price shall be correspondingly adjusted.

20.0 ORDER OF PRECEDENCE

- A. The Order of Precedence shall follow the order as set forth in Article 8 Contract Documents, page 00500-4 of the Agreement.
- B. In the case of a discrepancy between any of the Contract Documents, the most restrictive requirement shall govern unless otherwise determined by the Engineer.
- C. In the event that a conflict cannot be resolved by the methods listed in paragraph A or B above, the Engineer shall review the dispute and issue a clarification to resolve the issue. The Engineer's decision shall be binding on all parties. In general the Engineer will consider the overall intent of the project as presented in the contract documents, and render a decision consistent with the overall project objectives.

END OF SECTION

SECTION 01010

SUMMARY OF WORK

PART I GENERAL

1.01 **WORK COVERED IN CONTRACT DOCUMENTS**

- A. Furnish all labor, equipment, and materials necessary to construct one (1) 4-inch diameter Test Well and one (1) 2-inch diameter monitor well (TW-17) for the City of Lake Worth (OWNER) for the City of Lake Worth Water Treatment Plant in Lake Worth, Florida. The well site location is shown on the attached project drawings. Well construction will include well construction permitting, drill site preparation, drilling, setting of casings and screen, grouting, water quality testing, well logging, above-grade completion, locking cap, protective casing, well pad and bollards, wellhead piping assemblies, electrical service and controls, restoration of well site, and all incidental work as described herein and as shown on the attached project drawings.

- B. The anticipated maximum depth of the test well is approximately 320 feet below land surface (bls). Actual depth shall be determined in the field based on site specific conditions encountered during drilling and testing. Proposed construction details of the test well are provided in the project drawings.

- C. The anticipated final completion interval for monitor TW-17 well is from 270 feet bls to 280 feet bls. Actual final completion interval shall be based on site specific conditions encountered during test well construction. Proposed construction details of the permanent monitor well are provided in the project drawings.

- D. The CONTRACTOR shall be responsible for all labor, materials, transportation, tools, supplies, equipment, and appurtenances necessary to construct, develop, and test the well as specified herein. In general, all methods and material used under this construction shall be in accordance with the latest revisions of the American Water Works Association Standard for Wells (AWWA A100-06) and the National Water Well Association Standards as they apply to the particular needs or conditions encountered in the proposed work.

2.01 WORK BY OTHERS

- A. The CONTRACTOR will diligently perform the scope of work independently of all others who may perform concurrent tasks during execution of the scope of work.
- B. The OWNER reserves the right to add to the work in accordance with the Contract Documents.
- C. Access to the well site and work areas shall be limited to the areas shown on the project drawings and as discussed in the pre construction meeting(s).
- D. The OWNER'S project representative reserves the right to, throughout the construction process, perform onsite inspections of the CONTRACTOR and construction process. Documentation of work may include, but not be limited to, detailed documentation of daily work performed by the CONTRACTOR, and photographs and/or videos of critical phases of well construction, development, and testing.

3.01 WORK SEQUENCE

- A. CONTRACTOR must contact the Palm Beach County Health Department and submit applicable portions of the "Well Construction Permit Application", and any others required for construction as filed by the OWNER and Engineer prior to commencement of well drilling activities.
- B. Sequence of work will be discussed at the Pre-Construction meeting. The CONTRACTOR shall be prepared to perform the sequence as outlined in the Specifications. An alternative sequence of work may be considered if the proposed sequence is of benefit to the OWNER.
- C. Normal working hours shall be compliant with the City Code. Should the CONTRACTOR desire to carry on his work at night or outside regular working hours, they shall submit written notice to the OWNER/ENGINEER and allow a minimum of 48 hours for satisfactory arrangements to be made and for inspecting the work in progress.
- D. Start of construction and contract completion times will be in accordance with project specifications.

END OF SECTION

SECTION 01025

MEASUREMENT AND PAYMENT

PART I GENERAL

1.01 GENERAL REQUIREMENTS

- A. The CONTRACTOR shall furnish all labor, equipment and material required necessary to construct one (1) 4-inch diameter Test Well and one (1) 2-inch diameter monitor well (TW-17) for the City of Lake Worth (OWNER) for the City of Lake Worth Water Treatment Plant in Lake Worth, Florida.

- B. The prices stated in the proposal include all costs and expenses for taxes, labor, equipment, materials, commissions, transportation charges and expenses, patent fees and royalties, and labor for handling materials during inspection, together with any and all other costs and expenses for performing and completing the Work as shown on the plans and specified herein. The Basis of Payment for an item at the price shown in the Bid Form shall be in accordance with its description of the item in this Section and as related to the Work specified and as shown on the Drawings. Unit prices, where used, will be applied to the actual quantities furnished and installed in conformance with the Contract Documents.

- C. The CONTRACTOR's attention is called to the fact that the quotations for the various items of Work are intended to establish a total price for completing the Work in its entirety. Should the CONTRACTOR feel that the cost of any item of Work has not been established by the Schedule of Values or Measure and Payment, he shall include the cost for that Work in the other Bid Items so that his proposal for the project does reflect his total price for completing the Work in its entirety.

- D. CONTRACTOR applications for payment shall comply with OWNER contract terms and conditions.

PART II PRODUCTS (NOT USED)

PART III EXECUTION

1. PAY ITEM NO. 1 - BONDS AND INSURANCE

The costs of bonds, and any required insurance for the start of work shall be paid for at the Contract Lump Sum Price as listed on the Bid Form.

2. **PAY ITEM NO. 2 – MOBILIZATION/DEMobilIZATION/GENERAL CONDITIONS**

The work specified in this item consists of the work and operations necessary in mobilizing and demobilizing for the work as described by the contract documents, including but not limited to, those operations necessary for the movement of personnel, equipment, supplies and incidentals to and from the project site, as required by these specifications, including but not limited to, staging and storage areas, security facilities and services, establishment/de-establishment of temporary environmental controls, sanitary facilities, and the special provisions made by State and local laws and regulations, including sanitary facilities, safety, noise abatement, and any other pre- or post-construction expense necessary for starting and completing the work. This item also includes any costs incurred to comply with the General Conditions of the contract. Payment for this item shall be made at 50% of the Contract Lump Sum Price following completion of mobilization and 50% following completion of demobilization to and from the well site and acceptance by the OWNER. The Contract Lump Sum Price for mobilization/demobilization shall not exceed 10% of the total contract price.

3. **PAY ITEM NO. 3 – GENERAL ALLOWANCE**

This item shall apply to items agreed to by the ENGINEER and OWNER that are not otherwise covered in the Contract Bid Items, or where additional monies are necessary due to unforeseen circumstances, strictly out of the control of the Contractor. Application for payment of any monies in this allowance fund must be approved in writing by the ENGINEER and OWNER before any monies can be expended from this pay item. Any monies not used from this allowance shall not be paid to the Contractor, and shall remain with the OWNER at the conclusion of the project.

4. **PAY ITEM NO. 4 - DRILL 8-INCH BOREHOLE**

This pay item includes the actual length of mud rotary drilled hole and shall be measured vertically from land surface to the total drilled depth as approved by the ENGINEER. The borehole shall be paid for at the Contract Unit Price per foot, actual drilled borehole drilled and accepted by the ENGINEER, as listed on the BID FORM. The said Contract Unit Price shall include but not be limited to the furnishing of all material, labor and equipment necessary to complete the work as described in SECTION 02740.

5. **PAY ITEM NO. 5 - GEOPHYSICAL LOGGING**

Geophysical logging shall be paid as a lump sum for all logs specified for the well and include but not be limited to furnishing all material, labor and equipment necessary to complete the work as described in SECTION 02765

and accepted by the ENGINEER. Payment of this item will be made at the Contract Lump Sum Price as listed on the BID FORM.

6. **PAY ITEM NO. 6 – FURNISH, INSTALL AND GRAVEL PACK 4-INCH DIAMETER CASING AND WELL SCREEN**

The furnished and installed 4-inch diameter casing and well screen shall be installed to the depth specified by the ENGINEER as listed on the BID FORM. Payment of this item shall be paid for at the Contract Unit Price per linear foot, from land surface to the total depth installed and accepted, and shall include but not be limited to all labor, equipment and other materials necessary to properly install the casing, screen and gravel pack as described in Section 02770.

7. **PAY ITEM NO. 7 – DEVELOPMENT AND TEST WELL INTERVAL SAMPLING AND DEVELOPMENT**

Development and water quality sampling at each depth interval shall be paid for at the Contract Unit Price per interval as approved by the ENGINEER as described in SECTION 02770. The said Contract Unit Price shall include but not be limited to the furnishing of all material, labor and equipment necessary to complete development, sampling, and laboratory analyses as specified. Payment shall be determined by the completion of successful sampling as approved by the ENGINEER.

8. **PAY ITEM NO. 8 – CONVERT 4-INCH DIAMETER TEST WELL TO 2-INCH DIAMETER MONITOR WELL**

This pay item includes all work required to successfully convert the exploratory test well into a permanent 2-inch diameter monitor well including re-drilling of the 8-inch diameter borehole to the anticipated total depth; furnishing and installation of 2-inch diameter well casing and well screen; furnishing and placement of gravel pack; furnishing and placement of cement grout, and well development in accordance with the project specifications and as approved by the ENGINEER. This pay item shall be paid for at the contract lump sum price, as listed on the BID FORM. The said Contract Lump Sum Price shall include but not be limited to the furnishing of all material, labor and equipment necessary to complete the work as described in the project specifications.

9. **PAY ITEM NO. 9 – COMPLETE FINAL WELLHEAD, WELL PAD, AND BOLLARDS**

This pay item includes all work required to complete final wellhead, well pad, and bollard construction as shown on project drawings and approved by the ENGINEER. This pay item shall be paid for at the contract lump sum price,

as listed on the BID FORM. The said Contract Lump Sum Price shall include but not be limited to the furnishing of all material, labor and equipment necessary to complete the work as described in the project specifications and drawings.

10. **PAY ITEM NO. 10 – SITE RESTORATION**

This pay item shall include all labor, materials and equipment necessary to restore the well sites and all other areas affected by construction activities to the grades and conditions existed prior to construction or better. Payment shall be made at the Contract Lump Sum Price as listed on the BID FORM.

END OF SECTION

SECTION 01720

RECORD DOCUMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. On site maintenance of Record Documents.
- B. Required record information.

1.02 MAINTENANCE

- A. Maintain on site, one set of the following Record Documents; record actual revisions to the Work:
 - 1. Drawings.
 - 2. Specifications.
 - 3. Addenda.
 - 4. Change Orders and other modifications to the Contract.
 - 5. Shop Drawings, product data, and samples.
- B. Store Record Documents separate from documents used for construction.
- C. Record information concurrent with construction progress.
- D. In the interest of timely detection of non-conforming Work, all Record Drawing information must be furnished to the Engineer prior to submitting for payment of that particular item. No progress payment application requests will be approved by the Engineer without satisfactory record drawings for that particular items(s).
- E. Under no circumstances will roadway paving Work be allowed to start until the Engineer has reviewed the Record Drawing information for Work constructed within the roadway area that will be paved.
- F. All Record Drawing information such as elevations, distances, location of underground utilities, lake cross-sections, and road cross-sections must be obtained by a Professional Surveyor and Mapper, who is licensed in the State of Florida. The Surveyor will be retained by the Contractor. Information must be signed and sealed.
- G. Record Documents must be available to Engineer for examination at any time during the progress of the Work.
- H. Submit completed Record Documents upon completion of the Work and prior to application for final payment.
- I. Show record information in bold or boxed out to stand out from rest of Drawing.
- J. Record actual revision dates of the Work.

1.03 REQUIRED RECORD DRAWING INFORMATION

- A. All elevations and horizontal locations shown on the Drawings must be verified. Verification or deviation must be clearly indicated on the Drawings.
- B. Drainage
 - 1. Flow line elevation of pipe at headwalls, outfalls and structures.

2. Top elevation of headwalls, structures, and concrete caps.
3. Drainage Control Structures, Baffles, and Weirs. Obtain horizontal dimensions and vertical elevations.
4. Horizontal locations of headwalls, structures, and concrete caps.
5. Location of utilities and miscellaneous structures encountered which are different from or not shown on the Drawings.

C. Lakes, Canals, and Pump Station Intake Channels

1. Cross section at each design cross section shown on the Drawings and at a minimum 100 foot intervals. Obtain elevations at all grade breaks and across bottom from 20 foot beyond top of bank (each side).
2. Determine side slopes.
3. Locate top of bank and the edge of water at the control elevation and plot location on a drawing at the same scale as the construction drawings.

D. Roadways

1. Cross-section elevations at the profile grade line (centerline or edge of median) and at the edge of pavement at the following frequencies:
 - a. Major Roads (collector or higher): At high and low points of the profile grade and at even 100 foot stations in-between.
 - b. Local Roads: At high and low points of the profile grade.
2. Location of utilities and miscellaneous structures encountered which are different from or not shown on the Drawings.
3. Spot elevations in parking lots and access roads.

E. Wastewater/Reclaimed Water

1. Invert elevations in manholes and at end of stubouts.
2. Distance between manholes.
3. Top of manhole elevations.
4. Location of manholes, based on stationing system on Drawings.
5. Calculate slope of gravity mains.
6. Locate end of stubouts and services by stationing and offsetting from the gravity main and downstream manholes.
7. Length of stubouts.
8. Elevations of the top slab, wet well invert, influent pipe inverts, and driveway for lift stations.
9. Details of any design changes.
10. Location of utilities and miscellaneous structures encountered which are different from or not shown on the Drawings.
11. Top of force main elevations and finished grade at 100 foot intervals and at high and low points.
12. Locate force main fittings, valves, air release structures, etc. by stationing and offsetting from gravity wastewater manholes. If manholes are not located nearby, use reference points shown on the Drawings.
13. Elevation and clearances when wastewater mains cross either water mains or drainage pipe.
14. Changes in pipe material.
15. Bottom of wastewater service pipe elevation and top of drainage pipe elevation at all crossings.
16. Top of wastewater service pipe elevation and bottom of watermain elevation at all crossings.
17. Lift station electrical controls and FPL service to control panel.

F. Water

1. Top of pipe elevations at 100 foot intervals.
2. Distance from the reference points shown on the Drawings.
3. Horizontal location at 100 foot intervals.

4. Location of water services, valves, fittings, hydrants, blowoff points, etc. by stationing and offsetting from wastewater manholes. If wastewater manholes are not located nearby, use reference points shown on the Drawings.
5. Details of any design changes.
6. Location of utilities and miscellaneous structures encountered which are different from or not shown on the Drawings.
7. Elevations and clearances when water mains cross either wastewater or drainage pipe.
8. Changes in pipe material.

G. Conduit Sleeves

1. Horizontal location and size of conduit.

H. Structural

1. Obtain horizontal and vertical locations and elevations for all structural components, including but not limited to, intake structure including piles and cap, slabs, building and building features, grating, trash rack, etc.

I. General Site

1. Spot elevations shall be taken at a reasonable grid interval for finished grade verification. Obtain spot elevations at all grade or contours (as shown on the Drawings), grade breaks, property lines, and limits of construction.

PART 2 PRODUCTS

Not Used.

PART 3 EXECUTION

3.01 CONTRACTOR'S SURVEYOR RESPONSIBILITIES

- A. Engineer will provide the Contractor with electronic files of the construction drawings at the pre-construction conference. One copy of the electronic files will be provided on CD/DVD media in AutoDesk Civil 3D 2015 format. No warranty of the usability of the electronic files provided is expressed or implied. The cost of any required conversion or duplication of the electronic files from the format specified herein shall be the responsibility of the Contractor.
- B. The Owner and Engineer will advise the Contractor at the pre-construction conference of the acceptable method and file format by which the interim and final Record Drawing information will be provided to the Owner and/or Engineer.
- C. Record Drawing information shall be prepared electronically. The Record Drawing information shall be placed on a separate layer so that it is isolated from all other layers in the drawing file. This layer must be prepared in such a manner that it can be exported as a separate AutoCad file and subsequently inserted into an AutoCad drawing containing the approved design information. The AutoCad file shall be accompanied by an Adobe Acrobat portable document format (pdf) file of the Record Drawings.
- D. Place information in the Drawings in a manner that indicates which elevations and dimensions have been checked. This is to be done by crossing through the design elevation or dimension and placing the Record information next to it. If an elevation or dimension has not changed, the same procedures should be followed to confirm that it has been checked. Add new information in a manner to indicate that it is Record information and not design information.

- E. Each Record Drawing sheet must include the surveyor's name, company, address, license number, and date of field survey.
- F. Signed and sealed Record Drawings shall be submitted with all pay applications and at the conclusion of the Project.

3.02 CONTRACTOR RESPONSIBILITIES

- A. Record document information not required to be obtained by a Professional Surveyor and Mapper must be obtained by the Contractor.
- B. Mark Record information on one clean set of prints of the Contract Documents.
- C. Each Drawing must be stamped indicating that the information has been reviewed by the Contractor.
- D. Contractor's Surveyor will transfer Contractor supplied information to the record drawing.
- E. For pipes and conduits installed by Horizontal Directional Drilling (Section 02156), the Contractor shall furnish drilling logs and drilling profiles to the Engineer and to his Professional Surveyor and Mapper. The Record Information shall be added to the original drawings in AutoDesk Civil 3D 2015 format.

END OF SECTION

SECTION 02720

WELL CONSTRUCTION SEQUENCE

PART I GENERAL

1.01 SCOPE OF WORK

The following construction sequence applies to the construction and testing of test well (TW-17) for the City of Lake Worth. The scope of work will include construction of a 4-inch diameter temporary test well and 2-inch diameter permanent monitor well. Specific construction details, such as casing setting depths, screen interval, screen slot size, and gravel pack for the monitor well will be determined based on site specific lithologic conditions encountered during the pilot hole drilling and testing.

PART II PRODUCTS (NOT USED)

PART III EXECUTION

3.01 CONSTRUCTION SCHEDULE

- A. The construction schedule shall be met based on day work in accordance with local ordinances and excludes nights, weekends and Federal holidays. The CONTRACTOR will perform work on the site only within the designated official working hours unless otherwise approved by the ENGINEER.
- B. The CONTRACTOR shall procure all permits, certificates, and licenses required by law for the execution of the work and complete the work within the construction schedule. The CONTRACTOR shall comply with all federal, state, and local regulations and ordinances relating to the execution of the work. The ENGINEER must be furnished a copy of the permit prior to commencing work.

3.02 WELL CONSTRUCTION SEQUENCE

- A. Mobilize to the site and prepare the construction site for drilling of the pilot hole and production well. Set up drilling rig and support equipment within the area shown on the project drawings or as approved by the ENGINEER. The CONTRACTOR shall perform all mobilization related work as needed to perform the drilling in an efficient and safe manner. The CONTRACTOR shall perform all necessary site preparations, coordination and drilling support operations planning prior to initiating drilling so that the CONTRACTOR will contain drilling mud and drill cuttings within the site boundaries.

- B. Drill a nominal 8-inch diameter borehole to a depth of approximately 320 feet below land surface using the mud rotary method in accordance with SECTION 02740, DRILLING. Formation samples shall be collected by the CONTRACTOR every 5 feet, at a minimum, or as otherwise specified by the ENGINEER. The CONTRACTOR may set a temporary 8-inch diameter surface casing to facilitate drilling the borehole. The CONTRACTOR will determine the setting depth of the temporary 8-inch diameter surface casing.
- C. Prepare the 8-inch hole for geophysical logging by circulation of the drilling fluid until uniform and free of drill cuttings. Logging shall be conducted by the CONTRACTOR in accordance with SECTION 02765, GEOPHYSICAL LOGGING.
- D. Following completion of geophysical logging, the CONTRACTOR shall install a continuous casing string of approximately 290 feet of 4-inch diameter casing and 10 feet of 0.020-inch slot well screen. Casing construction, assembly and installation will be in accordance with SECTION 02745, CASING. CONTRACTOR will then install gravel pack in the annular space between the casing, screen and the borehole. Gravel shall be placed using only the tremmie method from the base of the well screen to land surface. Gravel pack shall be as described in SECTION 02750, SCREEN AND GRAVEL PACK. Gravel will be added as needed to support the casing and fill the borehole as it is pulled to shallower depths.
- E. Develop the well using airlift method until turbidity is lowered to an acceptable level for collecting a water sample as determined by the ENGINEER and in accordance with SECTION 02770, TEST WELL INTERVAL SAMPLING. The CONTRACTOR shall provide a test/sampling pump to allow for representative water samples to be collected by the ENGINEER and OWNER. Additional laboratory water quality samples shall be collected by the CONTRACTOR at each test interval for laboratory water quality analyses in accordance with SECTION 02270, TEST WELL INTERVAL SAMPLING.
- F. Upon completion of development and sampling, raise casing and screen to a depth directed by ENGINEER. Develop and sample as described above. This procedure will be repeated up to 6 times, as determined by the ENGINEER.
- G. Upon completion of the test well sampling, CONTRACTOR shall remove the test well and proceed to construct the monitor well in the same borehole.
- H. Following completion of test well drilling, re-drill the 8-inch borehole to a total depth of 280 feet below land surface. Prepare the borehole for casing installation by circulating the drilling fluid until all drill cuttings have been removed. Drilling shall be performed in accordance with SECTION 02740, DRILLING.

- I. Furnish and install approximately 270 feet of 2-inch diameter schedule 40 PVC well casing, and 10 feet of 2-inch diameter continuous slot, 0.020-inch slot, schedule 40 PVC well screen to a total depth of 280 feet below land surface. Casing construction, assembly and installation will be in accordance with Section 02745 CASING.
- J. Furnish and install gravel pack in the annular space between the casing, well screen and the borehole. Gravel shall be placed using only the tremmie method from the base of the well screen to a minimum of 5 feet and no more than 10 feet above the top of the well screen. Gravel pack shall be as described in SECTION 02750, SCREEN AND GRAVEL PACK.
- K. Grout annular space between well casing and borehole above the well screen in accordance with SECTION 02755, ANNULAR GROUT. Grout shall be placed using only the tremmie method from the top of the well gravel pack to land surface. Specific intervals of gravel and grout installation shall be determined by the ENGINEER.
- L. Develop the monitor well using a combination of compressed airlift development and pump development. Initial development shall be done using air lift alone to stabilize the gravel pack. After gravel pack has stabilized, perform pump development until well meets development criteria for sand and silt content as determined by the ENGINEER. All well development shall be performed in accordance with project specifications. The CONTRACTOR shall discharge all development water in accordance with project specifications.
- M. Complete the above grade protective casing, well locking cap, wellhead, well pad and bollards as described in the project drawings. The final well casing shall be left 30-inches above land surface.
- N. Perform complete site restoration as described in project specifications.

END OF SECTION

SECTION 02725

SUBMITTALS

PART I GENERAL

1.01 **WORK INCLUDED**

- A. Submit to the ENGINEER shop drawings, project data, samples and miscellaneous work related submittals required by the Specification Sections. Individual submittal requirements are specified in applicable sections of these Contract Documents.

- B. The ENGINEER'S review is only for general conformance with the design concept of the project and general compliance with the information given in the Contract Documents. Corrections or comments made on the shop drawings during the ENGINEER'S review do not relieve the CONTRACTOR from compliance with the requirements of the Contract Documents. Review of a specific item shall not include approval of an assembly of which the item is a component. The CONTRACTOR is responsible for: dimensions to be confirmed and correlated at the job site; information that pertains to the fabrication processes or to the means, methods, techniques, sequences and procedures of construction; impact on other work; coordination of CONTRACTOR'S Work with that of all other trades; and for performing all work in a safe and satisfactory manner.

- C. Miscellaneous submittals related directly to the Work (non-administrative) include warranties, guarantees, maintenance agreements, workmanship bonds, project photographs, survey data and reports, physical records, statements of applicability, quality testing and certifying reports, copies of industry standards, record drawings, overrun stock, and similar information, devices and materials applicable to the Work and not defined as shop drawings, product data or samples.

1.02 **SCHEDULE**

- A. CONTRACTOR shall prepare and submit, with Construction Schedule, a separate schedule listing dates for submission of shop drawings and projected return dates.

- B. Prepare and submit with the Construction Schedule, a separate schedule listing dates for submission and review of shop drawings, project data and samples that shall be needed for each product or piece of equipment.

- C. Coordinate and prepare the delivery and processing of submittals with the performance of the Work so that the Work is not delayed by submittals. Coordinate and sequence different categories of submittals for the same Work, and for interfacing units of Work, so that one is not delayed for coordination with another.
- D. No extension of time shall be allowed because of the CONTRACTOR'S failure to properly coordinate and sequence submittals.
- E. Do not proceed with purchasing, fabrication and delivery of Work related to a submittal until the submittal procedure is successfully complete.
- F. Coordinate fabrication and delivery of CONTRACTOR furnished materials.

PART II PRODUCTS

2.01 SHOP DRAWINGS

- A. Original drawings, prepared by a Contractor, subcontractor, supplier or distributor which illustrate some portion of the Work and showing fabrication, layout, setting or erection details, diagrams, performance curves, data sheets, schedules, templates, patterns, reports, calculations, instructions, dimensions, measurements and other similar information not in standard printed form applicable to other projects.
- B. Provide information prepared by a qualified detailer showing dimensions and notes based on field measurements, identifying materials and products in the work shown indicating compliance with standards and special coordination requirements.
- C. Identify details by reference to sheet and detail numbers shown on the Contract Drawings.

2.02 PROJECT DATA

- A. Manufacturer's standard schematic drawings:
 - 1. Modify drawings to delete information that is not applicable to project.
 - 2. Supplement standard information to provide additional information applicable to project.
 - 3. All proposed products for well construction.
 - 4. Proposed construction of transition coupling from screen to riser casing.

- B. Manufacturer's catalog sheets, brochures, diagrams, schedules, performance charts, illustrations and other standard descriptive data.
 - 1. Clearly mark each copy to identify pertinent materials, products or models.
 - 2. Show dimensions and clearances required.
 - 3. Show performance characteristics and capacities.
- C. A list of materials and equipment for the disposal of formation water.
- D. A list of drilling equipment, settling tanks, and pumping equipment to be used for the construction of the well.
- E. Documentation of welder's certification.
- F. Flow meter calibration certificates.
- G. State and County certifications for proposed laboratory.
- H. Provide completed chain of custody forms and analytical results for all sampling events. Laboratory reports shall be submitted within 30 days of receipt of samples by the laboratory.

2.03 SAMPLES

- A. Physical examples to illustrate materials, equipment or workmanship and to establish standards by which completed work is judged, including but not limited to gravel pack material.
- B. Office samples of sufficient size and quantity to clearly illustrate:
 - 1. Functional characteristics of products or materials, with integrally related parts and attachment devices.
 - 2. Full range of color samples.
- C. Field samples and mock-ups:
 - 1. Erect at the project site at a location acceptable to the PURCHASER.
 - 2. Construct each sample or mock-up complete, including work of all trades required in finished work.

PART III EXECUTION

3.01 CONTRACTOR RESPONSIBILITIES

- A. Review Shop Drawings, Project Data and Samples prior to submission.
- B. Verify:
 - 1. Field measurements.
 - 2. Field construction criteria.
 - 3. Catalog numbers and similar data.
- C. Coordinate each submittal with requirements of Work and of Contract Documents.
- D. The CONTRACTOR'S responsibility for errors and omissions in submittals is not relieved by the ENGINEER'S review of submittals.
- E. The CONTRACTOR'S responsibility for deviations in submittals from the requirements of the Contract Documents is not relieved by the ENGINEER'S review of submittals, unless the OWNER or the ENGINEER gives written acceptance of Specific deviations.
- F. Notify ENGINEER, in writing at time of submission, of deviations in submittals from requirements of Contract Documents.
- G. Begin no work that requires submittals until return of submittals with ENGINEER's stamp and initials or signature indicating review.
- H. After ENGINEER review, distribute copies as required.

3.02 SUBMISSION REQUIREMENTS

- A. Schedule submissions at least 14 days before dates reviewed submittals will be needed.
- B. Submit eight (8) copies of Shop Drawings, Project Datum and Samples which CONTRACTOR requires for distribution plus 4 copies that will be retained by the ENGINEER.
- C. Accompany submittals with transmittal letter, in duplicate, containing:
 - 1. Date.

2. Project title and number.
 3. CONTRACTOR's name and address.
 4. Notification of deviations from Contract Documents.
 5. Other pertinent data.
- D. Submittals must include:
1. Date of submittal and revision dates.
 2. Project title and number
 3. The names of:
 - a. Engineer
 - b. Contractor
 - c. Subcontractor
 - d. Supplier
 - e. Manufacturer
 - f. Separate detailer when pertinent
 4. Identification of product or material.
 5. Relation to adjacent structure or materials.
 6. Field dimensions, clearly identified as such.
 7. Identification of deviations from Contract Documents.
 8. CONTRACTOR's stamp, initialed or signed, certifying to review of submittal, verification of field measurements and compliance with Contract Documents.

3.03 RESUBMISSION REQUIREMENTS

- A. Shop Drawings:
1. Revise initial drawings as required and resubmit as specified for initial submittal.
 2. Indicate on drawings any changes which have been made other than those requested by ENGINEER.
- B. Project Data and Samples:

Submit new datum and samples as required for initial submittal.

END OF SECTION

SECTION 02740

WELL DRILLING

PART I GENERAL

1.01 SCOPE OF WORK

This section covers the work, materials, and equipment necessary for drilling the boreholes for the test well.

1.02 SUBMITTALS

- A. Drilling plan including all equipment, logistics and personnel required for the project.
- B. A list of any drilling additives intended for use on this project shall be submitted to the ENGINEER prior to drilling activities.
- C. A list of drilling equipment to be used on this project shall be submitted to the ENGINEER prior to mobilization, including drill bit diameters and dimensions of staged bit assemblies proposed for drilling.
- D. Water well drilling, NSF approved, copper-free drilling joint compound.
- E. Location for disposal of waste solids.
- F. Drilling fluid solids management system specifications, mud pump type and pump curve, and anticipated up-hole mud velocities during drilling shall be submitted to the ENGINEER.

PART II PRODUCTS

2.01 DRILLING EQUIPMENT

- A. All equipment shall be in good working condition and suitable for the proposed work. The CONTRACTOR will provide assurances that he has the proper equipment to adequately complete the project and overcome possible complications. The CONTRACTOR shall provide all materials, equipment and labor reasonably inferable and required for proper completion of the work whether specifically outlined in the Contract Documents or not.
- B. The OWNER will reserve the right to inspect the equipment of each CONTRACTOR submitting a bid as a part of the evaluation of bids.

- C. The CONTRACTOR will provide all tools, bits, and all other necessary equipment for drilling.
- D. Drilling equipment shall be capable of performing applicable drilling methods within the established time of construction.
- E. The CONTRACTOR will take special precautions to reduce to a minimum the nuisances and damage to property which could result from working adjacent to a road. Any damage to public or private property will be immediately repaired or paid for by the CONTRACTOR at no expense to the OWNER. Equipment, tools and materials will be located in places where they will produce a minimum of nuisance. CONTRACTOR will take appropriate action to minimize noise, light and other nuisances caused by the drilling operation. The appropriate warning signs will be posted on the streets and the appropriate police will be informed of the location of the construction site.

2.02 DRILLING FLUID

The CONTRACTOR will provide all drilling fluids, water, and additives as required. ENGINEER approved non-potable water added to the well will have a minimum chlorine residual of 50 ppm.

2.03 TEST AND SAMPLING EQUIPMENT

- A. Provide equipment for measuring drilling fluid properties including a marsh funnel, viscosimeter, filter press and a fluid density balance.
- B. Provide sampling bags or containers for collection and storage of formation samples.

PART III EXECUTION

3.01 GENERAL REQUIREMENTS

- A. Notify the ENGINEER 7 days prior to drilling. Normal working hours shall be compliant with the City Code. Should the CONTRACTOR desire to carry on his work at night or outside regular working hours, they shall submit written notice to the OWNER/ENGINEER and allow a minimum of 48 hours for satisfactory arrangements to be made and for inspecting the work in progress.
- B. Provide at all times a thoroughly experienced, competent, and Florida licensed driller during all operations at the drill site. Provide sufficient competent driller's helpers during all operations at the drill site.

3.02 DRILLING

- A. Anticipated borehole depths and diameters for the test well and the monitor well are depicted on the project drawings. Borehole diameters are considered nominal dimensions. The CONTRACTOR shall recommend the appropriate bit size for drilling the correct borehole diameter. Borehole depths provided in the specifications are estimates, only; actual depths may vary and will be determined by the ENGINEER.
- B. Boreholes shall be advanced in such a manner that the drilled hole will proceed straight and plumb. The drilling rate shall be optimized for cuttings removal with minimal mixing and accurate formation sample collection. Pilot boreholes shall be advanced in 5-foot increments for more accurate sample collection. Cuttings shall be predominantly cleared from the borehole at the end of each increment (5-foot increments for pilot holes and reverse air drilled holes, 20 feet increments for reamed holes).
- C. Boreholes shall be drilled and conditioned to permit geophysical logging and casing installation as per SECTION 02740, DRILLING and SECTION 02745, WELL CASING. The borehole shall be cleared of cuttings and stable to permit subsequent tasks to be completed without impairment.
- D. The reaming assembly shall consist of a lead bit with the same outer diameter as the pilot hole and progressively larger diameter bits up to the reamed hole diameter. The reaming assembly should not exceed 8 feet in length.

3.03 DRILLING FLUIDS

- A. All drilling fluid storage tanks shall be above ground. Dug mud pits will not be permitted. Tanks shall be of sufficient length and construction to allow settling or removal of cuttings and prevent their reintroduction to the borehole. A mud system shall be used that includes a vibratory shale shaker and centrifugal desanders. Mud tanks shall be of sufficient length and construction to allow settling or removal of cuttings and prevent their reintroduction to the borehole.
- B. The CONTRACTOR shall routinely monitor and record drilling fluid properties including mud weight, viscosity, gel strength, pH, liquid and solids content. Monitoring shall be in accordance with manufacturer's recommendations, AWWA and International Association of Drilling Contractors (IADC). The mud and solids management systems used by the CONTRACTOR for this project shall meet the CONTRACTOR's proposed drilling fluid manufacturer specifications for the intended application.

3.04 ALIGNMENT REQUIREMENTS

- A. Pilot holes and reamed holes shall be drilled round and straight throughout.
- B. The completed well will be sufficiently plumb and straight.

3.05 COMPLIANCE WITH GOVERNMENTAL REGULATIONS

Construct the well in strict conformance with all laws, rules, regulations, and standards related to the construction of wells in the State of Florida and local regulatory agencies.

3.06 FORMATION SAMPLES

- A. One (1) set of representative formation samples shall be collected by the CONTRACTOR for the well. Samples shall be taken at each 5-foot level and each change in formation or material type. The method must yield samples that are representative of the actual depth to which drilling has progressed.
- B. Each sample shall be approximately 8 ounces and be placed in a cotton, soil sample bag, Hubco or equivalent, or as approved by ENGINEER. Each sample shall be labeled with the date, well identification, and depth from which the sample was taken clearly marked on the container in indelible ink. The CONTRACTOR will store and protect the samples from damage or disturbance until they have been released to and accepted by the ENGINEER.

3.07 DRILLING LOGS

- A. Prepare a daily drilling log for inspection and submittal to the ENGINEER. Include in the log the depths and type of geologic formation encountered; drilling penetration rate, in minutes, for each five feet interval; general formation hardness based on drilling; type of drilling, chemical, water and mud additives; loss of circulation zones; additives to the well to control flow; water added to supplement reverse air drilling; problems during drilling; date, time, and depth for each entry. The log shall be kept current with a copy located at the drill site. The CONTRACTOR shall maintain an up to date drill string tallies and will be available for inspection by the ENGINEER.
- B. A final well log shall be prepared that includes copies of the above. An as-built drawing of the well shall be submitted showing casing dimensions and details; screen and riser dimensions; gravel pack type, size, placements depths; and borehole dimensions.
- C. Submittals will be made as required to the appropriate regulatory agencies per the applicable local, state and federal regulations. The CONTRACTOR will provide copies of all submittals to the ENGINEER.

3.09 WASTE DISPOSAL

- A. All solid and liquid waste, including but not limited to drilled solids, cuttings, drilling mud, drilling additives, spent or unused chemicals and unused products shall be disposed of or recycled by the CONTRACTOR in an environmentally responsible manner and in accordance with applicable regulations. The disposal or recycling location must be identified in a submittal to the ENGINEER. Prior to disposal, the location must be accepted by the ENGINEER. The CONTRACTOR will prevent wastes from migrating from the designated construction area. The CONTRACTOR will promptly clean up drilling by-products that migrate outside of the designated construction area.
- B. Remove from the drilling site all cuttings and other material removed by the drilling operations that are not required to complete the work. Solid material shall be disposed of in accordance with local and state regulations at an approved disposal site, approved by the ENGINEER. Removal of cuttings, mud and formation water from the site is considered incidental to the Work and does not constitute additional payment to the CONTRACTOR.
- C. Depressions left in the land surface from the cleanup of residues, or for any other reason resulting from the CONTRACTOR's activities, shall be filled with clean fill material and graded smoothly.

END OF SECTION

SECTION 02745

WELL CASING

PART I GENERAL

1.01 SCOPE OF WORK

This section covers the work, equipment and materials necessary for furnishing and installing the well casing.

1.02 SUBMITTALS

Provide manufactures specifications and technical data on all casings to be provided for well construction.

PART II PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. All casings will be approved for use in municipal public supply wells, and the specifications as outlined. Test well casing material shall be determined by the CONTRACTOR. Monitor well casing shall be 2-inch diameter schedule 40 PVC as indicated in project drawings. The CONTRACTOR will furnish and satisfactorily install each string of casing. All casings will be new, unused and in good physical condition. Warped or damaged casing will be rejected.
- B. The Contract will indicate an estimate for the amount of casing. The OWNER or the ENGINEER will determine actual lengths. The CONTRACTOR shall be responsible for ensuring that the selected casing will withstand all stresses of construction without impairment.
- C. The CONTRACTOR will provide the ENGINEER with an inventory of all casing delivered to the site and maintain a tally during installation.
- D. All casing sections shall each be clearly marked with type, grade and manufacturer. If required by the ENGINEER, the CONTRACTOR shall provide additional backup supporting documentation from the manufacturer. Casing connections shall meet manufacture specifications for water tightness. Connections shall have equal strength as the casing itself.

2.02 POLY VINYL CHLORIDE (PVC) CASING

- A. PVC casing and couplings shall be schedule 40 equivalent. Any equivalent

casing selected must be shown to have sufficient joint and tensile strength, internal pressure rating, resistance to collapse and ability to withstand all stresses of construction. Any alternates must be approved in advance by the ENGINEER.

- B. All casings shall be clearly marked with type, grade and manufacturer. If required by the ENGINEER, the CONTRACTOR will provide additional backup supporting documentation from the Manufacturer.
- C. Only the PVC manufacturer approved joint compound will be used for pipe assembly. The joint compound will be approved for water well construction.
- D. Final PVC well casing shall be completed as shown on the drawings.
- E. Bills of lading shall be provided for casings delivered for well construction.

2.04 CENTERING GUIDES

- A. Casing centering guides (centralizers) will be placed on all casing strings, prior to installation, at 30-foot intervals with the first set of centralizers placed within 5 feet from the bottom of the casing. Centralizers will be fixed to the casing at coupling locations.
- B. Centralizer material will be steel when attached to carbon steel and stainless steel when attached to PVC casing. Guides will be welded when attached to steel; and steel strapped to PVC.
- C. Fixed centering guides shall extend outward from the casing to within 1/2 inch of the maximum drill bit dimension.

PART III EXECUTION

3.01 GENERAL

- A. Casings will be installed and completed as described in the specifications and drawings. Actual casing depths will be determined by the ENGINEER.
- B. The casing installation method shall be approved in advance by the ENGINEER and be consistent with manufacturer specifications.
- C. Test well casing and screen shall remain intact for the duration of all required sampling. If the test well fails, the hole shall be redrilled and the test intervals shall be repeated until acceptable results are obtained.
- D. Casing failure by any means, including but not limited to: any collapse, breakage, separation, dents, tears or rips during construction that in any way

impairs the use of the well in the opinion of the ENGINEER, shall be repaired or replaced at the CONTRACTOR's sole expense.

- E. Casing connections shall meet manufacture specifications for water tightness. Connections shall have equal strength to the casing itself.
- F. Casing elevators must be approved by the ENGINEER before use.

END OF SECTION

SECTION 02750

WELL SCREEN AND GRAVEL PACK

PART I GENERAL

1.01 SCOPE OF WORK

This section covers the work, equipment and materials necessary for furnishing and installing the well screen and gravel pack.

1.02 SUBMITTALS

- A. Provide data on all proposed additives and manufacturer's specifications.
- B. Provide manufactures specifications and technical data on all screens and gravel to be provided for well construction.
- C. Provide grain size distribution data on gravel pack and a 16 ounce sample prior to use.
- D. Provide shop drawings showing screen/PVC casing transition coupling.

PART II PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. All screens shall be approved for use in municipal public supply wells, and to the specifications as outlined. The CONTRACTOR shall furnish, satisfactorily install and gravel pack the string of well screen and riser casing. All screens, riser casings couplings and adapters shall be new, unused, in good physical condition and delivered to the site in the original protective wood crates as provided by the manufacturer. Warped or damaged materials will be rejected.
- B. The well screen to be used in the construction of the 4-inch diameter test well shall be 10 foot length, continuous slot, 0.020 inch slot size, or as directed by the ENGINEER. Material of well casing shall be determined by the CONTRACTOR with approval from the ENGINEER. Gravel for the 4-inch diameter test well will be Standard Sand and Silica Company, "Sand", 6 by 14, gravel, or equivalent.
- C. The well screen to be used for the construction of the monitor well shall be 2-inch continuous slot, 0.020 inch slot size schedule 40 PVC, 10-foot length or

approved equal. Gravel will be Standard Sand and Silica Company, "Sand", 6 by 14, gravel, or equivalent.

- D. The Project Drawings and Documents indicate an estimate of the screen length. Actual lengths and depths of screen may vary by +/- 10 feet and shall be determined following completion of test well drilling by the ENGINEER.

2.02 CENTERING GUIDES

- A. Casing centering guides (centralizers) shall be placed on the screen and casing, prior to installation, at 30 feet intervals with the first set of centralizers placed within 5 feet from the bottom of the screen. Centralizers shall be fixed to the casing at weld ring or coupling locations. Centralizers shall be aligned so that they do not interfere with installation of gravel and cement installation tubing.
- B. Centralizer material shall be stainless steel when attached to stainless steel, and carbon steel when attached to PVC. Guides shall be welded when attached to steel; and screw attached using a 1/4 inch screws or lags that penetrate not more than 80 percent of the coupling and casing when attached to PVC. Any casing penetrated will be rejected and shall be replaced at the CONTRACTOR'S expense.
- C. Centralizer material shall be non ferrous and will not attached by drilled into the casing. No ferrous materials will be used for attachment.

2.03 GRAVEL PACK MATERIAL

- A. Gravel pack material shall be a minimum of 95% silica, approved by the ENGINEER, sorted and graded so that there is 90% retention on the well screens installed. The CONTRACTOR shall provide a grain size analysis of gravel to be used during well construction. Based on the CONTRACTOR provided sample and grain size analysis, the ENGINEER shall provide to the CONTRACTOR well screen slot size.
- B. The type of gravel pack selected will be from a supplier located within the State of Florida.

PART III EXECUTION

3.01 GENERAL

- A. Screens and casing risers shall be installed as described in the specifications and drawings. Actual casing depths will be determined by the ENGINEER.

- B. The screen assembly and installation method shall be approved in advance by the ENGINEER and be consistent with manufacturer specifications.
- C. Gravel pack will be installed in a water slurry by the tremmie method only. The base of the tremmie pipe shall be placed at the gravel placement depth and be moved upward consistent with the gravel fill depth.
- D. Water required for the construction of the well shall be potable and meet primary and drinking water standards pursuant to Chapters 62-3 and 62-550 Florida Administrative Code.
- E. Screen or casing failure by any means, including but not limited to: collapse, breakage, separation, dents, tears or rips during construction, that in any way impair the use of the well in the opinion of the ENGINEER, shall be repaired or replaced at the CONTRACTOR's sole expense.
- F. Casing connections shall meet manufacture specifications for water tightness. Connections shall have equal strength as the casing itself.
- G. Well gravel pack shall be installed to no less than 5 feet and no more than 10 feet above the installed well screen and grouted to land surface. Specific gravel and grouted intervals shall be determined by the ENGINEER.

END OF SECTION

SECTION 02755

ANNULAR GROUT

PART I **GENERAL**

1.01 **SCOPE OF WORK**

This section covers the labor, equipment and materials required to furnish and install the annular grout.

1.02 **SUBMITTALS**

- A. Provide data on all proposed additives and manufacturer's specifications.
- B. Provide bulk cement units weight tickets for verification of cement quantities pumped.
- C. During cementing, provide cement slurry weight data for each grouting stage. A fixed, safe, accessible location to collect samples must be provided to the satisfaction of the ENGINEER. Samples of the cement slurry shall be collected, weighed and recorded. The correct mix ratios shall be maintained. If performed in batches, provide slurry weight and collect sample for each batch mixed. If performed in continuous mixing, provide slurry weights and collect samples at the beginning, middle, and end of pumping for each grouting stage.

PART II **PRODUCTS**

2.01 **GENERAL REQUIREMENTS**

- A. The CONTRACTOR shall furnish and install all grout and additives as specified.
- B. Cement and dry additives shall be delivered to the site in their dry state and mixed with water on site. "Readymix", cement mixed with water prior to delivery to the site shall not be accepted for annular grouting.

2.02 **PORTLAND CEMENT**

Cement grout shall be API class B Portland cement and conform to ASTM C150, Type II standards.

2.03 **BENTONITE**

- A. Bentonite furnished for cementing shall be raw bentonite and be added at

the bulk facility and thoroughly mixed at the ratio specified. Small batches (less than 50, 94 lb. bags of cement) of grout may be mixed on site. Bentonite-cement mix ratio shall not exceed applicable regulations for cement grout.

- B. If the CONTRACTOR proposes to mix bentonite with cement on site, all ingredients shall be thoroughly mixed, at the ratio specified, to the satisfaction of the ENGINEER. The CONTRACTOR shall demonstrate the dry mixing method to the ENGINEER prior to mixing the slurry. Following dry mixing, the CONTRACTOR shall mix a slurry sample for measurement and provide a method of measurement to determine the weight in pounds per gallon of cement slurry to confirm proper mix ratios. Bentonite-cement mix ratio shall not exceed applicable regulations for cement grout.

PART III **EXECUTION**

3.01 **GROUTING**

- A. The CONTRACTOR is solely responsible for the successful execution of grouting. Annular grout shall be in conformance with all applicable local and state regulations.
- B. The CONTRACTOR is solely responsible for defects in the grout or grouted interval. The CONTRACTOR shall take all precautions to protect the casing from collapse or damage during grouting. Any defects in the grout job or casing damage resulting from grouting shall be corrected by the CONTRACTOR at his own expense.
- C. The CONTRACTOR shall provide 24 hour notice prior to each stage of cementing of the well to enable the ENGINEER to observe all cementing operations.
- D. Provide a method of measurement to determine the weight in pounds per gallon of cement slurry to confirm proper mix ratios. Samples of the cement slurry shall be collected, weight and recorded by the CONTRACTOR in sight of the HYDROGEOLOGIST. The correct mix ratios shall be maintained. If performed in batches, provide slurry weight and collect samples for each batch mixed. If performed in continuous mixing, provide slurry weights and collect samples at the beginning, middle and end of pumping for each grout stage. The CONTRACTOR shall provide a fixed, safe, accessible location for the ENGINEER to view and/or collect grout samples during the cementing process.
- E. Grouting is to be conducted in stages. The first cementing stage shall be conducted via the pressure grout method through the base of the casing. Subsequent lifts of grout shall be performed using the tremmie method. The

top of the hardened grout from the previous grouting stage shall be measured in the presence of the ENGINEER prior to each cementing stage. Each cementing stage shall be given 12 hours of curing time prior to resuming cementing. It is the responsibility of the CONTRACTOR to determine the collapse strength of the casing and the appropriate amount of grout for each grouting stage. Cementing calculations shall be reviewed with the ENGINEER in advance of each grouting stage. Grout shall be allowed to cure for 48 hours before continuation of drilling operations.

- F. During grouting, the casing is to be filled with water and pressurized to 50 pounds per square inch (psi). All pressure gauges shall be fitted with an isolation valve. This pressure shall be maintained during cement emplacement and the cement set up period for 8 hours following the grout stage completion; this pressure shall be monitored for a minimum 1 hour period following pressure grouting stage by the CONTRACTOR. Clear water shall be circulated within the casing from bottom to top to cool the casing during the set up period.
- G. The grout mixture for the initial grouting stage after each casing installation shall be API Class B neat Portland cement mixed with no more than 5.5 gallons of water per sack of cement. At a minimum, the neat cement mixture shall be used to grout the lower 100 linear feet of casing. Additional grouting stages after casing installation above the initial grouting stage shall be API Class B Portland cement mixed with up to 6% bentonite and no more than 9 gallons of water per sack of cement as approved by the ENGINEER. Only potable water shall be used for the grout mix.
- H. Where boreholes have been significantly eroded in the opinion of the ENGINEER and PVC casing is being installed, a 12% bentonite cement mix shall be used. The CONTRACTOR shall obtain regulatory approvals prior to using this type of cement.

3.02 SETTING TIME

- A. The cement must be allowed to cure 12 hours between cementing stages.
- B. The final cement stage shall have a minimum 48 hours to cure before continuation of drilling operations.

END OF SECTION

SECTION 02765

BOREHOLE GEOPHYSICAL LOGGING

PART I GENERAL

1.01 **SCOPE OF WORK**

- A. This section covers the equipment, work and materials necessary to perform geophysical logging of the well.
- B. Provide the following geophysical logging and well survey equipment:
 - 1. Dual Induction logs
 - 2. Natural gamma log
 - 3. Spontaneous potential log
 - 4. Caliper log
 - 5. Temperature log
 - 6. Fluid resistivity log

PART II PRODUCTS (NOT USED)

PART III EXECUTION

3.01 **GENERAL**

- A. All logging shall be supervised by the ENGINEER with 24 hours advanced notice. The CONTRACTOR is responsible to ensure that logs are complete and include the entire borehole and cased intervals as directed by the ENGINEER. Logging should be done as soon as possible after the drilling tools have been removed from the logged interval.
- B. When the hole has been drilled to a depth determined by the ENGINEER, it must be prepared for geophysical logging. Borehole preparation will include but not be limited to: i) continuation of drilling fluid circulation until drill cuttings have been removed from the borehole, and the fluid is uniform in the borehole; or ii) reverse air pumping until the discharge water is free of cuttings and suspended sediment. The CONTRACTOR must make all reasonable efforts to leave the borehole free from obstructions in preparation for geophysical logging. Logging must be done immediately following the completion of

borehole preparation unless otherwise stated in the Contract or as stipulated by the ENGINEER.

- C. Each log must be run and recorded in a continuous fashion to qualify as an acceptable log.
- D. The CONTRACTOR is responsible to ensure that the logs are complete. Any obstructions or fill material or borehole of reduced diameter more than 1/2-inch in the borehole or cased intervals will be removed or reamed by the CONTRACTOR at his own expense.
- E. All logs will include a repeat section of not less than 50 feet of the portion of the hole. The ENGINEER will determine the repeat section.
- F. All logs shall be appropriately labeled with all appropriate information. Two (2) field copies shall be made available to the ENGINEER upon completion. Five (5) copies of finished logs are to be provided within two weeks of logging.

END OF SECTION

SECTION 02770

TEST WELL INTERVAL SAMPLING

PART I GENERAL

1.01 SCOPE OF WORK

- A. This section covers the work, equipment and materials necessary for furnishing and installing the test well and performing interval sampling.
- B. The purpose of the interval sampling is to determine aquifer quality. Representative groundwater samples will be collected from approximately six (6) intervals between the depths of approximately 50 feet and 320 feet below land surface. Sampling depth will be based on pilot hole results.
- C. The test well shall be located at the well location as shown on project drawings. Following interval sampling, the test well will be converted into a permanent monitor well. Details for the monitor well are outlined in the project drawings and in the well construction sequence.
- D. An alternate interval testing and sampling program may be proposed by the CONTRACTOR however; at a minimum the CONTRACTOR must have the capability to perform the work as specified.

1.02 SUBMITTALS

- A. Provide manufacturer specifications and technical data on well casing and screen used for installation in the test well.
- B. State and County certifications for proposed laboratory.
- C. Provide completed chain of custody forms and analytical results for all sampling events. Laboratory reports shall be submitted within 30 days of receipt of samples by the laboratory.

PART II PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. At a minimum, casings shall conform to the requirements specified in SECTION 02745, WELL CASING.

2.02 TEST WELL CASING

- A. The test well casing shall have a minimum diameter of four (4)-inches. The CONTRACTOR will recommend the appropriate schedule of casing for use in the test well for ENGINEER approval based on the CONTRACTOR'S experience. Test well casing material shall be recommended by the CONTRACTOR; material must be of sufficient strength to withstand the process of test well interval sampling.

2.03 TEST WELL SCREEN

- A. The CONTRACTOR shall recommend a screen that will withstand the stresses of installation, development, and sampling without collapse or impairment of the water sampling program. Test well casing and screen material will be determined by the CONTRACTOR. Material shall be new and unused and conform to ASTM standards.
- B. The selected screen shall have sufficient tensile and collapse strength to withstand the proposed testing program.

2.04 GRAVEL PACK

Gravel pack material shall be as standard for 0.020 inch slot screen as specified in SECTION 02750, WELL SCREEN AND GRAVEL PACK.

PART III EXECUTION

3.01 GENERAL

- A. The test well will consist of approximately 290 feet of 4-inch diameter casing and 10 feet of 0.020 inch slot screen. The test well will be installed in the 8-inch diameter pilot hole at a depth of approximately 300 feet and gravel packed to surface.
- B. Following test well and gravel pack placement, the test interval will be developed using air lift, surge block, surge pumping or another ENGINEER approved method. After development of the interval, a CONTRACTOR provided test/sampling submersible pump will be installed in the test well so that a representative water sample can be retrieved from the test interval. A sample shall be collected when each interval has been developed to the satisfaction of the ENGINEER. Each interval zone testing is anticipated to take approximately 2 to 3 hours for completion, however, may vary from interval to interval.
- C. The CONTRACTOR shall subcontract an analytical laboratory to perform sampling and analytical services. The sample from each test interval shall be collected and tested for the following parameters at a minimum: temperature, specific conductivity, total dissolved solids, soluble iron, total iron, hydrogen sulfide, turbidity, ammonia, color and chloride. Sample collection and

handling procedures shall be in accordance with a state approved laboratory quality assurance plan. The costs for the analysis shall be included in the contract unit price for each sample.

- D. Following successful water sampling, the 4-inch diameter test well and screen will be pulled up to the next higher interval to be sampled. The test well will then be gravel packed again and the process of development and water sampling repeated for up to six (6) samples.
- E. The process of sampling and pulling back the test well will be repeated at various depths until the uppermost sample has been collected.
- F. Following interval sampling, the test well materials will be removed and the borehole will be converted to monitor well TW-17.
- G. An alternate interval testing and sampling program may be proposed by the CONTRACTOR. However, at a minimum the CONTRACTOR must have the capability to perform the work as specified.
- H. The CONTRACTOR will re-drill, replace and re test any test well component, tool, pump or any associated component that fails for any reason before representative samples are obtained.
- I. An alternate interval testing and sampling program may be proposed by the CONTRACTOR however; at a minimum the CONTRACTOR must have the capability to perform the work as specified. Any alternate plan shall be paid for in the same manner as specified in the bid form.

3.02 CONVERSION TO MONITOR WELL

- A. Following completion of interval well testing, the borehole shall be re-drilled and converted to a permanent monitor well as described in 02720 WELL CONSTRUCTION SEQUENCE. Well casing and screen materials shall be as described in sections 02745 WELL CASING AND 02750 WELL SCREEN AND GRAVEL PACK.
- B. Monitor well development shall include the same methods of development as used during test well interval sampling until sand and silt content meets development criteria as determined by the ENGINEER.

3.03 DISCHARGE WATER

- A. Discharge water shall always be contained and under control by the CONTRACTOR. Any erosion that results from the discharge water shall be immediately repaired by the CONTRACTOR to its previous non-eroded condition.

- B. The CONTRACTOR shall ensure that the discharge water does not impact adjoining property unless it is specifically approved by the ENGINEER, does not flood streets or impede any traffic flow in any way, and does not cause a nuisance in general.

END OF SECTION

SECTION 02938

SODDING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Preparation of subsoil.
- B. Placing topsoil.
- C. Fertilizing.
- D. Sod installation.
- E. Maintenance.

1.02 REGULATORY REQUIREMENTS

- A. Comply with regulatory agencies for fertilizer and herbicide composition.

1.03 DELIVERY, STORAGE, AND HANDLING

- A. Deliver sod on pallets. Protect exposed roots from dehydration.
- B. Do not deliver more sod than can be laid within 24 hours.

1.04 EXISTING CONDITIONS

- A. All existing grass areas which are damaged or destroyed during construction are to be replaced with new sod of the same variety, unless otherwise noted, which existed prior to construction.
- B. In all cases, Contractor is responsible for the restoration of the grass to the conditions that existed prior to construction.

1.05 FIELD MEASUREMENTS

- A. On pipeline projects, sodded areas will be measured based on maximum trench widths shown on the Drawings. Sod placed in excess of the maximum trench widths or limits detailed on the Drawings will be at the full expense of the Contractor.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Topsoil: Muck; free of plants, weeds, and roots.
- B. Sod: Live, fresh, and uninjured at time of planting, free of objectionable weeds, and have a soil mat of sufficient thickness adhering firmly to the roots to withstand all necessary handling. Transport within 24 hours after being stripped and plant as soon as possible.
- C. Fertilizer: 6 percent nitrogen - 6 percent phosphoric acid - 6 percent potash, 40 percent organics.
- D. Water: Free of excess and harmful chemicals, acids, alkalies, or any substance which might be harmful to plant growth. Salt water not allowed.
- E. Wood Pegs: Softwood; sufficient size and length to ensure anchorage of sod on a slope.

PART 3 EXECUTION

3.01 PREPARATION OF SUBSOIL

- A. Prepare subsoil to eliminate uneven areas and low spots. Maintain lines, levels, profiles and contours. Make changes in grade gradual. Blend slopes into level areas.
- B. Remove foreign materials, weeds and undesirable plants and their roots. Remove contaminated soil.

3.02 PLACING TOPSOIL

- A. Spread topsoil to a minimum depth of 2 inches over area to be sodded.
- B. Place topsoil during dry weather.
- C. Roto-till to a depth of 6 inches.
- D. Fine grade the area to be sodded to eliminate ridges, depressions and other irregularities, and to ensure positive drainage.


3.03 FERTILIZING

- A. Apply fertilizer uniformly at a rate of 16 pounds per 1000 square feet.
- B. Apply after smooth raking of topsoil and prior to installation of sod.
- C. Apply fertilizer no more than 48 hours before laying sod.
- D. Lightly water to aid the dissipation of fertilizer.

3.04 SOD INSTALLATION


- A. Moisten prepared surface immediately prior to laying sod.
- B. Place sod on the prepared surface with edges in close contact and embed firmly and smoothly by light tamping with appropriate tools.
- C. Do not stretch or overlap sod pieces.
- D. Where sodding is used in drainage ditches, the setting of the pieces must be staggered to avoid a continuous seam along the line of flow.
- E. In order to prevent erosion caused by vertical edges at the outer limits, tamp the outer pieces of sod so as to produce a feather edge effect.
- F. On slopes 6 inches per foot and steeper, lay sod perpendicular to slope and secure every row with wooden pegs at maximum 2 feet on center. Drive pegs flush with soil portion of sod.
- G. After installation, saturate sod with water to a depth of 4 inches into the soil.
- H. After sod and soil have dried, roll sodded areas to ensure good bond between sod and soil and to remove minor depressions and irregularities.
- I. After rolling, keep sod moist for the duration of the contract period and in no case less than 2 weeks. The moistened condition should extend at least to the full depth of the rooting zone.

END OF SECTION

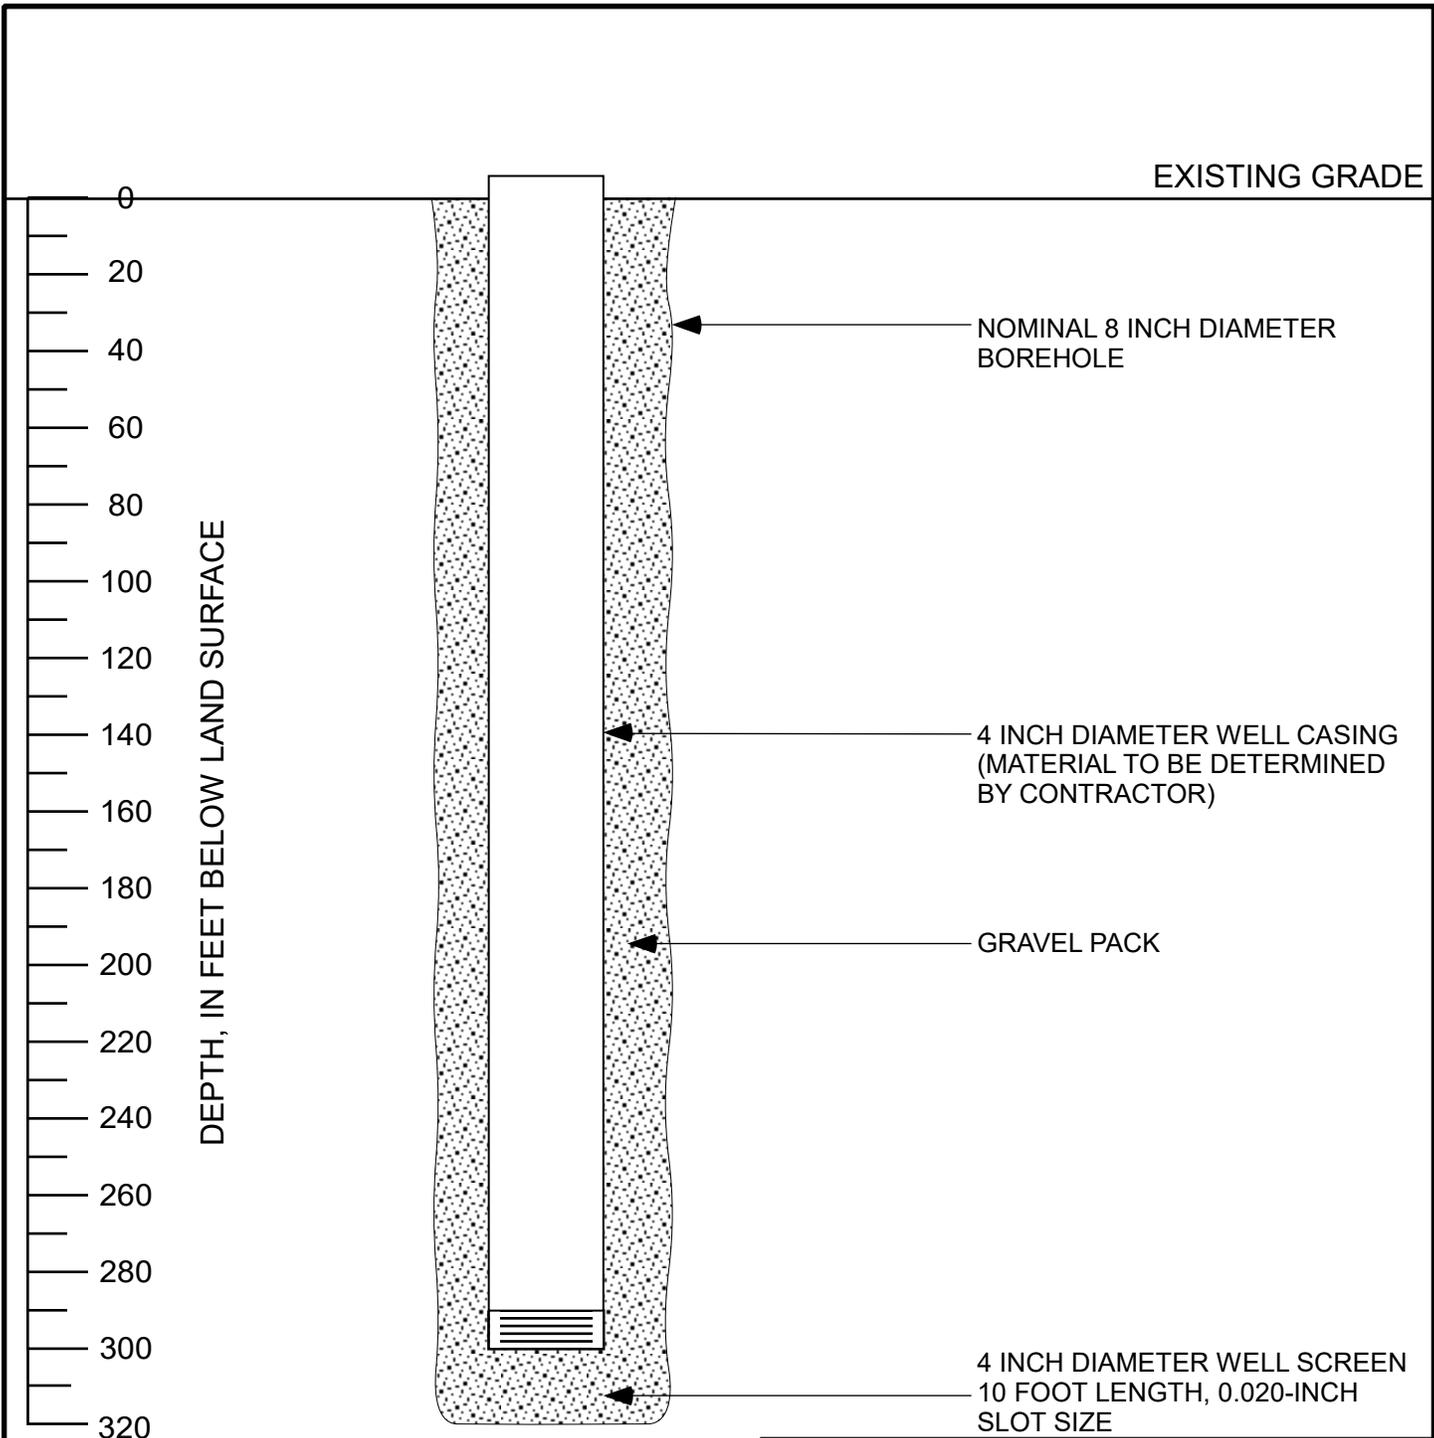

JLA Geosciences, Inc.

LEGEND:  GRAVEL PACK  WELL CASING  WELL SCREEN			SCALE: AS SHOWN	DATE: 08/10/15
DEPTHS HAVE BEEN ESTIMATED FOR BIDDING PURPOSES. ACTUAL DEPTHS WILL BE DETERMINED BY THE HYDROGEOLOGIST DURING CONSTRUCTION			DRAWN BY: RKS	DWG #: 1
PROJECT SITE: CITY OF LAKE WORTH SURFICIAL AQUIFER TEST WELL TW-17				PROJECT NO: 16-026
FIGURE TITLE: 4-INCH EXPLORATORY TEST WELL WELL CONSTRUCTION DETAIL				FIGURE NO: 2

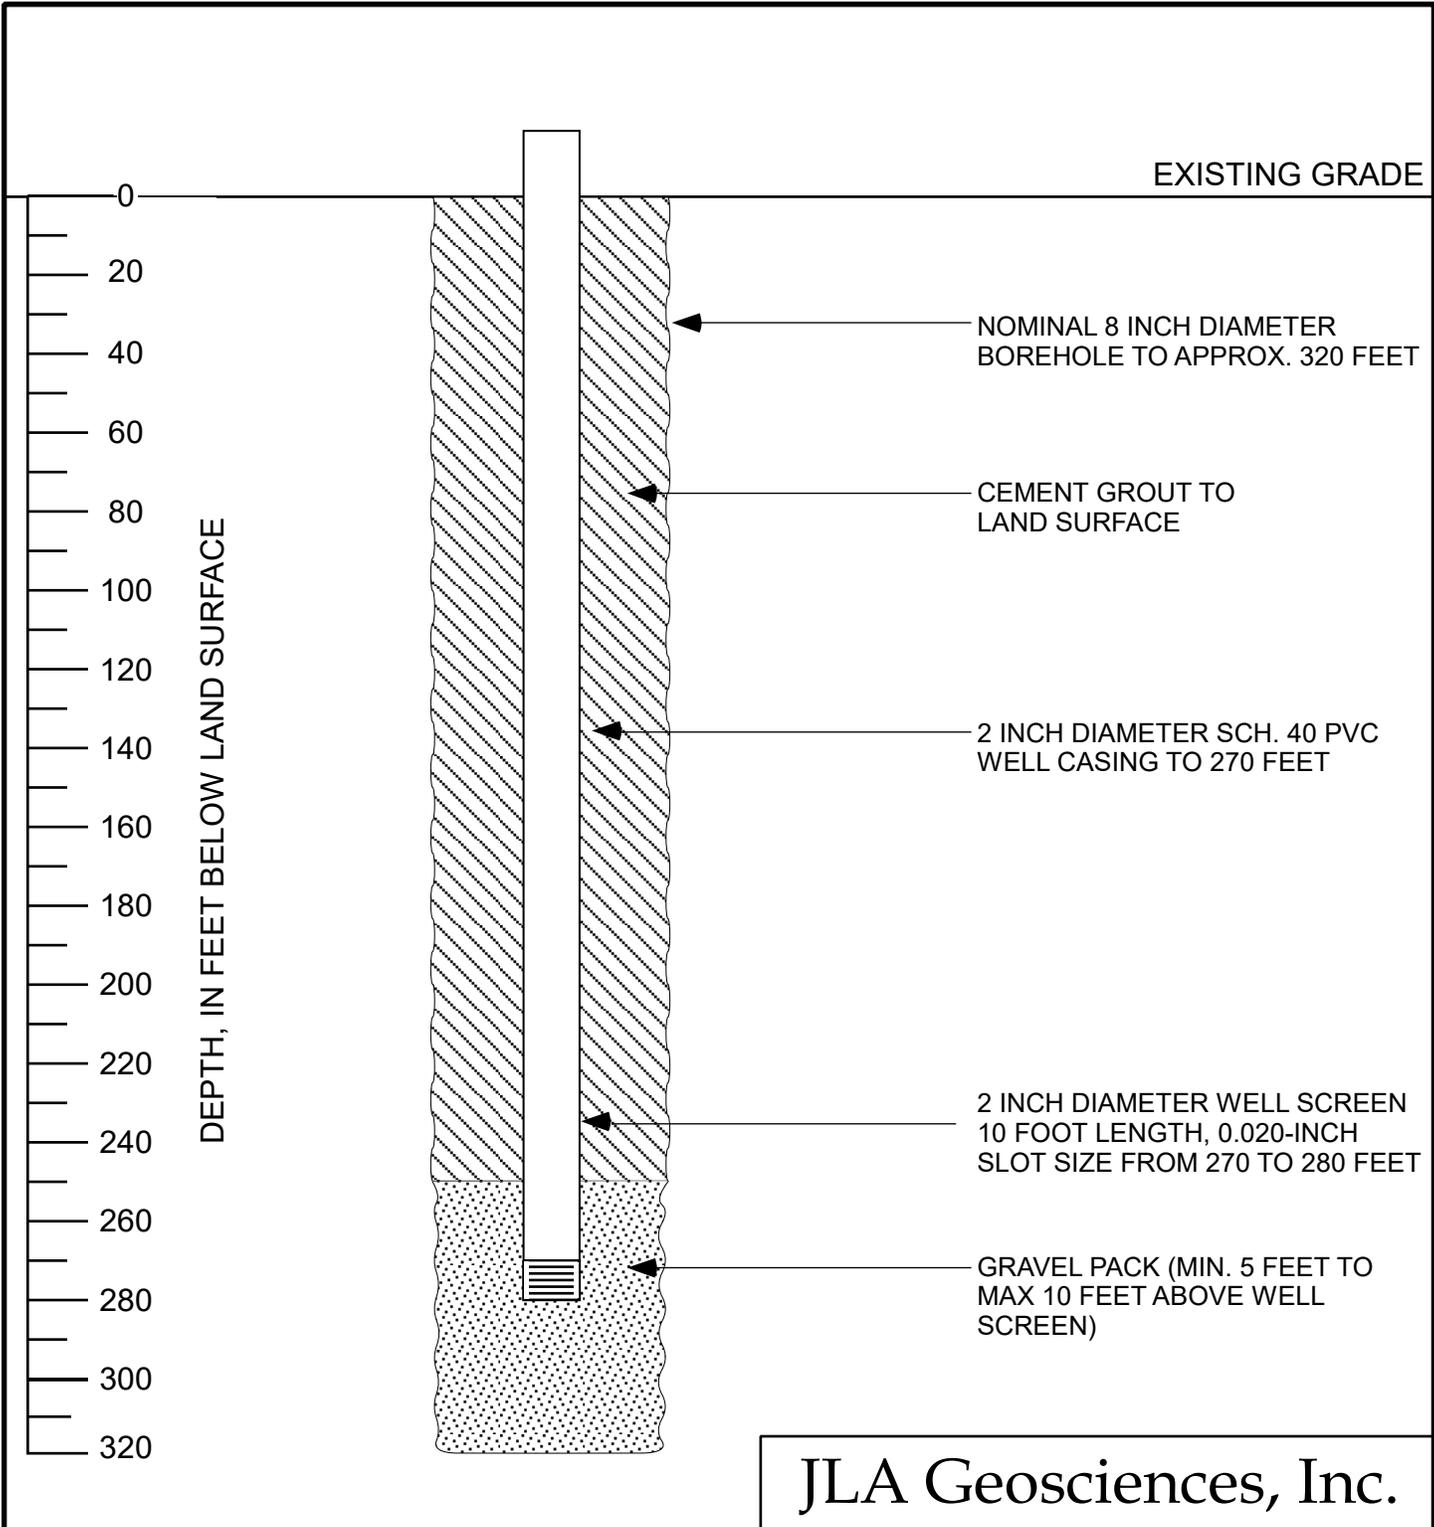

LEGEND: GRAVEL PACK WELL CASING GROUT WELL SCREEN	SCALE: AS SHOWN	DATE: 08/10/16
DEPTHS HAVE BEEN ESTIMATED FOR BIDDING PURPOSES. ACTUAL DEPTHS WILL BE DETERMINED BY THE HYDROGEOLOGIST DURING CONSTRUCTION	DRAWN BY: RKS	DWG #: 1
PROJECT SITE: CITY OF LAKE WORTH SURFICIAL AQUIFER TEST WELL TW-17		PROJECT NO: 16-026
FIGURE TITLE: 2-INCH MONITOR WELL WELL CONSTRUCTION DETAIL		FIGURE NO: 3


6" CL 51 DIP BOLLARDS,
FILL WITH CONCRETE WITH
1/4" THICK POLYETHYLENE
COVER IN SAFETY YELLOW

2'-6" SQUARE
CONCRETE PAD
(SLOPE TO DRAIN)


8" ALUMINUM
LOCKING CAP

STAINLESS STEEL
IDENTIFICATION TAG

LAKE WORTH
TW-17
PAD ELEV _____
TOP OF
CASING ELEV _____

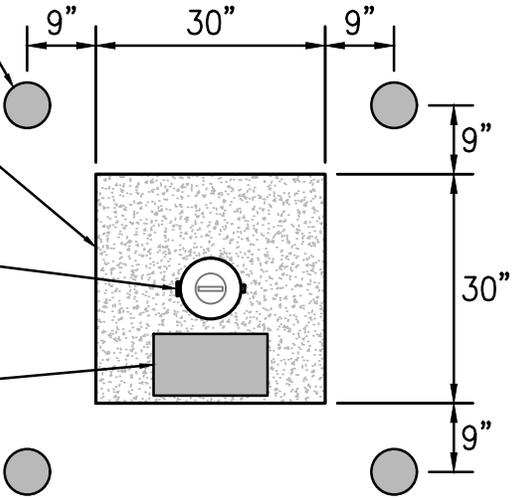

PLAN

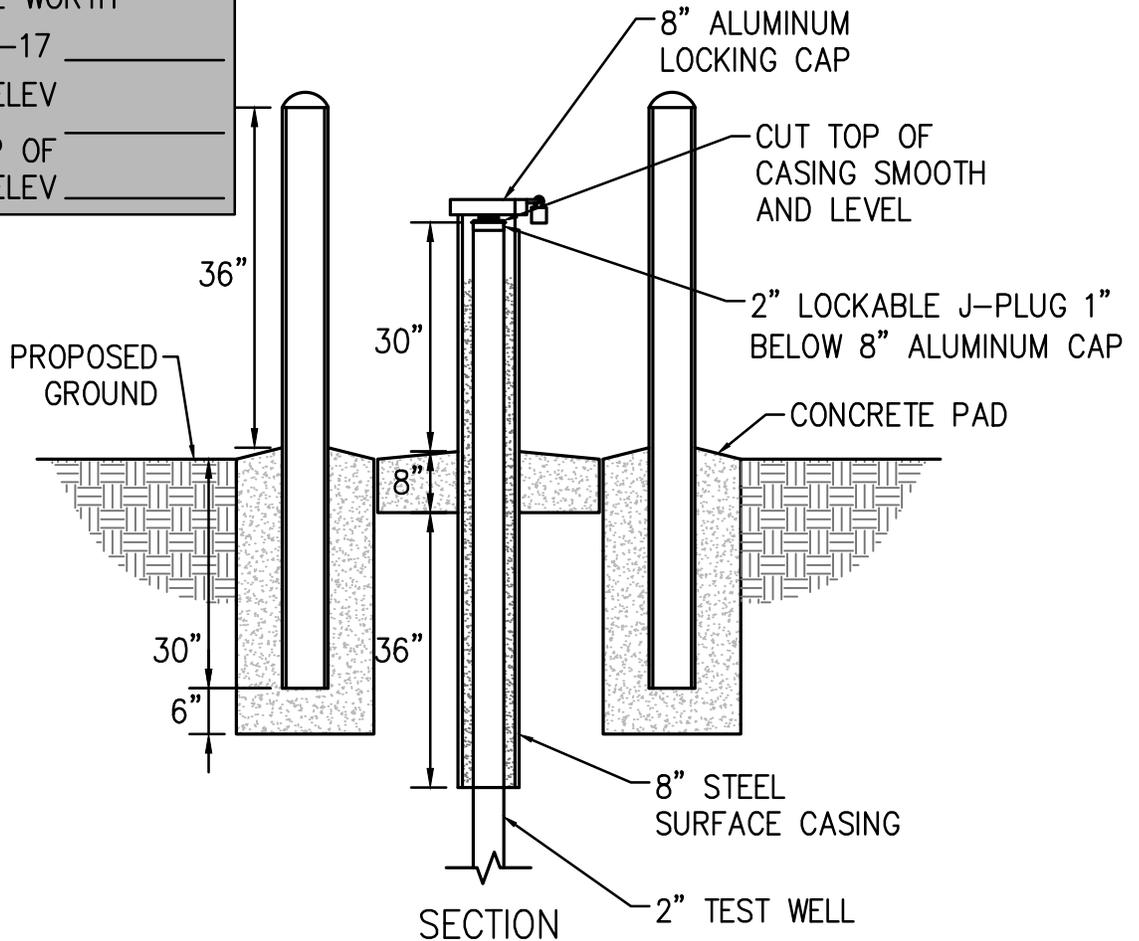

SECTION

TEST WELL NO. TW-17

SEC. 21, TWP. 44 S., RGE. 43 E.

DWG: K:\lwu_17\wm\dwg\wl17ex01.dwg
PLOT DATE: Sep 23, 2016 - 9:15am
XREFS: IMAGES:

REV:-----

FL. E.B. NO. 48

FL. L.B. NO. 48

FIELD: -----

MOCK • ROOS
ENGINEERS • SURVEYORS • PLANNERS

FIGURE 4
SURFICIAL AQUIFER
TEST WELL TW-17
CITY OF LAKE WORTH

SCALE: NTS

DATE: 2016-SEPT.


P.A.NO. B6019.00

DR. NO. A- 4664

DRAWN:-----

APPR: JRL

5720 Corporate Way, West Palm Beach, Florida 33407
(561) 683-3113, fax 478-7248

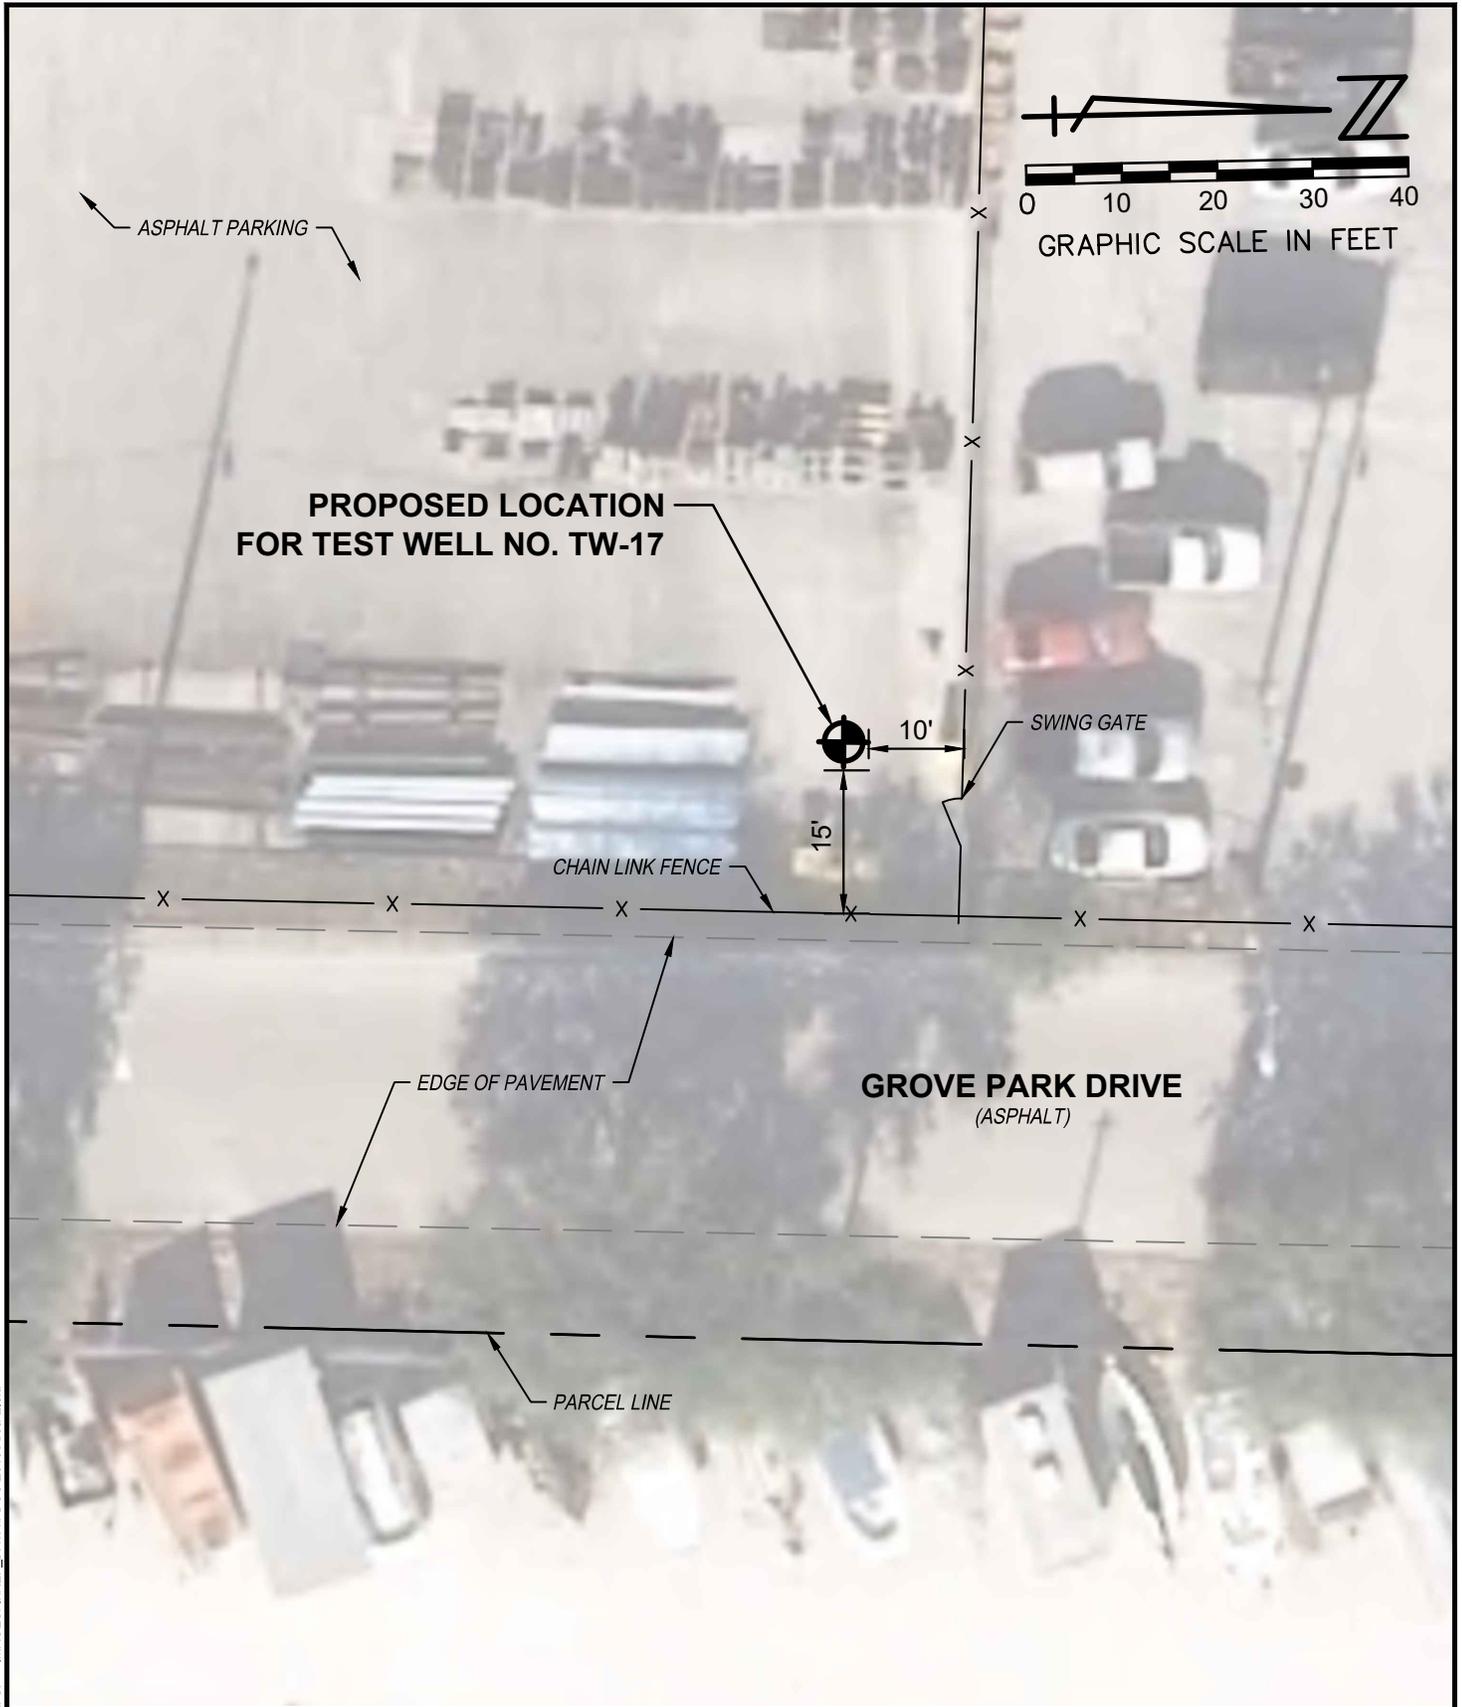

DWG: K:\lwu_lwu_wl17\wl17ex01.dwg PLOT DATE: Jul 22, 2016 - 3:41pm
 XREFS: IMAGES: I:\REF_DATA\PCO\2015\A\Aer-E.sld

SEC. 21, TWP. 44, RGE. 43

SCALE: AS SHOWN	FL. E.B. NO. 48	FL. L.B. NO. 48	FIGURE 5 TEST WELL TW-17 LOCATION DRAWING CITY OF LAKE WORTH PLAM BEACH COUNTY, FLORIDA	DATE: JULY 2016
FIELD: ----	MOCK • ROOS ENGINEERS • SURVEYORS • PLANNERS 5720 Corporate Way, West Palm Beach, Florida 33407 (561) 683-3113, fax 478-7248			P.A. NO. B6019.00
DRAWN: MNF				DR. NO. 44-43-21-212
APPR: JRL				SHEET 1 OF 1